




THERMAL MANAGEMENT

Therm-L-Wrap™

Product Highlights

- Excellent Radiant Heat Protection
- Convective Heat Protection up to +200°C (+392°F)
- Self-Wrapping Design
- Flexible
- Fluid and Chemical Resistant

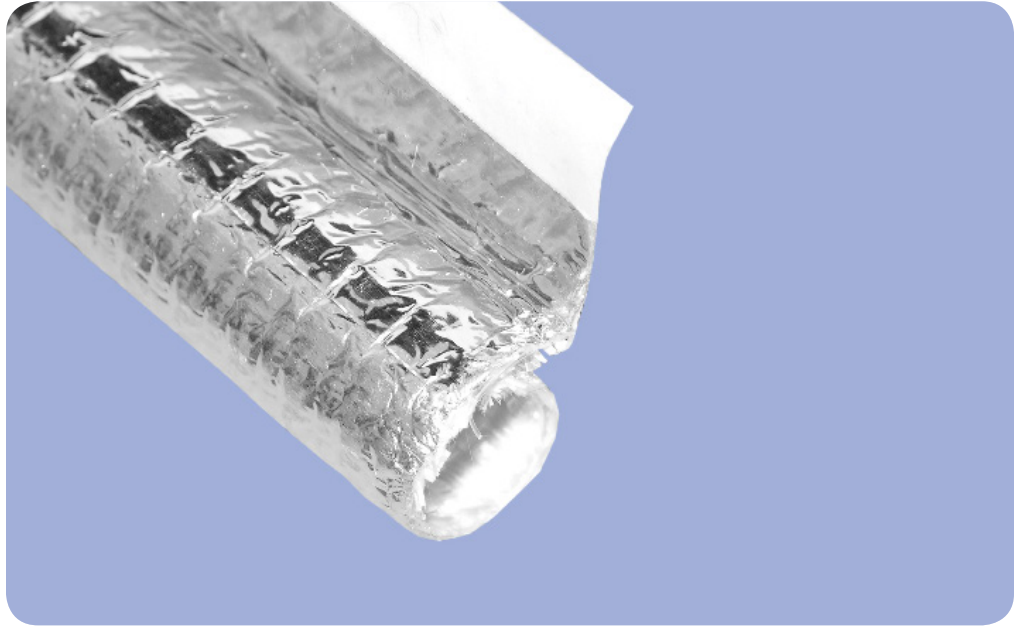

Therm-L-Wrap™ is a self-wrapping, reflective sleeve designed to provide thermal protection from both radiant and convective heat. Composed of a woven fiberglass base fabric and a lamination of aluminum foil, the product can withstand convective heat soaks up to 200°C and simultaneously protect critical components from radiant or reflected heat.

The unique woven structure imparts a level of flexibility not found in other reflective products. It also allows the product to maintain a circular profile when flexed.

The self-wrapping design of Therm-L-Wrap allows for quick and easy installation while the addition of a self-sealing adhesive reinforcement allows for permanent closure. The adhesive strip acts as a barrier to dirt and fluids while maintaining the full integrity of the finished aluminized sleeve.



Our manufacturing sites are certified ISO 9001, ISO/TS 16949, or AS/EN 9100, and ISO 14001

THERMLWRAP_04192013

BentleyHarris®
Protection Products

Performance Data – Therm-L-Wrap™

Property	Test Method	Result
Thermal Endurance (Heat Soak) 6 hrs at 200°C		No Delamination
Flammability	ASTM D-350, Method B	Self Extinguishing
Tear Strength	ASTM D-5733	Warp: 250 lbs. avg.
Tensile Strength	ASTM D-5035	Warp: 250 lbs. avg.
Fluid Resistance	BH 100-003B	No Delamination in Standard Automotive Fluids

All numeric data shows average or typical values.


Product Specifications

Commercial Part Number	Recommended Application Range mm (in)	
	Min Ø	Max Ø
Therm-L-Wrap 10	9 (23/64")	11 (7/16")
Therm-L-Wrap 13	12 (15/32")	14 (9/16")
Therm-L-Wrap 16	14 (9/16")	17 (11/16")
Therm-L-Wrap 19	15 (19/32")	20 (4/5")
Therm-L-Wrap 25	21 (53/64")	26 (1")

Cutting Tolerances

Length (mm)	Tolerance (mm)
Less than (lt) 25	± 1.6
25 to lt 75	± 3.2
75 to lt 150	± 4.8
150 to lt 300	± 6.4
300 to lt 900	± 12.7
900 to lt 1067	± 25.4

Thermal Effectiveness of Sleeve Insulation

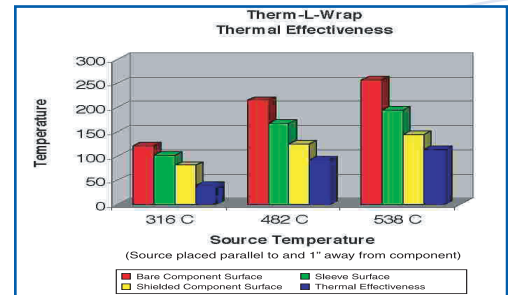

Part Numbering System

Example	Product Name	Size	Color	Quantity
	Therm-L-Wrap 13	13	Alu	500m +/- 12.7

The information and illustrations given herein are believed to be reliable. Federal-Mogul makes no warranties as to their accuracy or completeness and disclaims any liability in connection with their use. Federal-Mogul's only obligations are those in the standard term of sale for this product and Federal-Mogul will not be liable for any consequential or other damages arising out of the use or misuse of this product. Users should make their own evaluations to determine the suitability of the product for specific applications.

©2007 Federal-Mogul Systems Protection, manufacturer of Bentley-Harris protection products.

USA: (1) 800 926 2472
Europe: (33) 3 44 39 06 06
Japan: (81) 45 479 0201
China: (86) 21 6182 7688

www.federalmogul.com/sp

BentleyHarris®
Protection Products