


PRODUCT SPECIFICATION DRAWING
Proprietary Information not to be reproduced

Product Title:

1/C 1 AWG, EXANE INSULATION, (UL) RHH / RHW CSA RW90

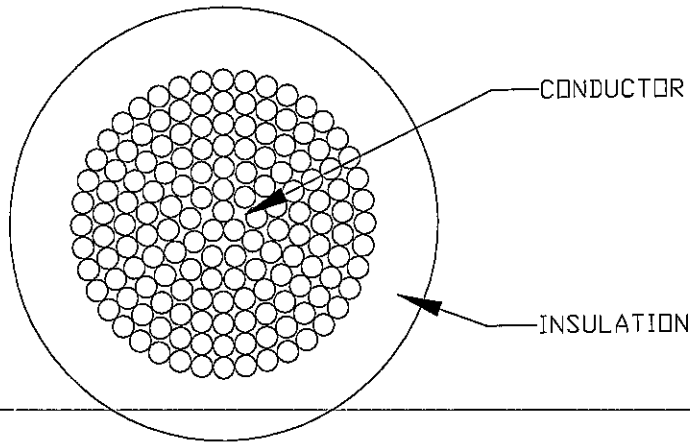

CONSTRUCTION: (1 REQUIRED)

NOMINAL DIAMETER
(Inches) (mm)

<u>1.0</u>	<u>CONDUCTOR:</u>	1 AWG 225/24 Tinned Copper	0.385	9.779
<u>2.0</u>	<u>INSULATION:</u>	Irradiation Cross-Linked Exane (Polyolefin) Minimum Average Wall Thickness 0.090 inches	0.570 ± .015	14.478 ± 0.381
<u>3.0</u>	<u>COLOR:</u>	Dark Gray		
<u>4.0</u>	<u>MARKING:</u>	Insulated conductor is printed in ink with contrasting color as follows: " P & H MINING EQUIPMENT INC. XLPO-125 1/C 1 AWG E31697 2000V (UL) RHH/RHW PR I – CSA RW90 -40°C 1000V LL14444 FT4 "		
<u>5.0</u>	<u>TECH DATA:</u>			
5.1	Voltage Rating:	2000 V (RMS)		
5.2	Weight:	380 lb/1,000 ft, Nominal		

705356