


NU-SLEEVE VPI-200

Electrical Equipment

NU-SLEEVE VPI-200 is a double wall coated fiberglass sleeving. It is made by applying a layer of silicone rubber to a braided electrical grade fiberglass substrate to produce a Grade A silicone rubber coated fiberglass sleeving that is then over-braided with a 3-ply fiberglass MIL-Y-1140H yarn to provide a high degree of abrasion resistance and saturability for vacuum pressure impregnation. The over-braid bonding process adheres the over-braid to the silicone coated substrate and minimizes end fray to improve assembly performance and eliminate the long term handling effects of operator dermatitis.

NU-SLEEVE VPI-200 has excellent electrical properties, excellent heat stability and is designed to wick in and retain resins for added dielectric and mechanical properties without excessive bulk.

NU-SLEEVE VPI-200 features high dielectric protection, maximum flexibility for ease of installation, improved abrasion resistance, non-slip bond between layers and has a minimum dielectric strength of 8,000 volts. For higher voltage ratings, consult factory.

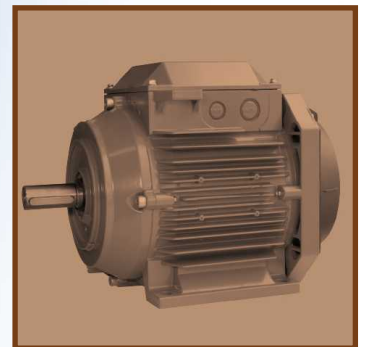

All our sites are ISO TS16949
and ISO 14001 certified



FIBERGLASS OVERBRAIDED SILICONE RUBBER COATED SLEEVING

- Class 220 Insulation
- UL & CSA Recognized Grade A
Silicone Rubber Coated Fiberglass Sleeveing: UL File #E93101, CSA File #LR67735 with E-Glass overbraid for high voltage / VPI applications
- Conforms to:
 - NEMA TF-1 TYPE6
 - UL1441 VW-1
 - MIL-I-3190/6, QPL-3190
- Available Sizes: AWG #8 – 3/4"
- Packaging: Standard Spools, Bulk Spools, Cut to length.
- Color: Natural (Light to Tan) only.

Dimensions

NEMA Size	Nominal Diameter (inches)	Nominal Diameter (mm)	Delfingen Part No.	Mini Diameter (inches)	Maxi Diameter (inches)
8	0.135	3.43	VP2000008	0.129	0.141
7	0.148	3.76	VP2000007	0.144	0.158
6	0.166	4.22	VP2000006	0.162	0.178
5	0.186	4.72	VP2000005	0.182	0.198
4	0.208	5.28	VP2000004	0.204	0.224
3	0.234	5.94	VP2000003	0.229	0.249
2	0.263	6.68	VP2000002	0.258	0.278
1	0.294	7.47	VP2000001	0.289	0.311
0	0.330	8.38	VP2000000	0.325	0.347
3/8"	0.387	9.83	VP2000375	0.375	0.399
7/16"	0.450	11.43	VP2000437	0.438	0.462
1/2"	0.512	13.00	VP2000500	0.500	0.524
3/4"	0.768	19.51	VP2000750	0.750	0.786

Operating Range (NEMA Class H):	-70° C to 220° C		
Dielectric Strength:	Dry: 8,000 volts, 60 Hz AC @ 500V / S rate of rise Wet: > 80% of the dry values		
Dielectric constant:	(10,000 Hz)	2.86	
	(100 Hz)	2.87	
Volume resistivity:	Ohm.cm x 10 ¹⁴	6.2	
Dissipation factor:	(10,000 Hz)	.0011	
	(100 Hz)	.0016	
Tensile Strength:	MPa	8.3	
Hardness:	Shore A	340	
Elongation at break:	%	410	
Fungus resistance:	Inert	None at 40x	
Rate of Burning:	Self-extinguishing with removal of heat source		
Radiation Resistance:	(10 Mrads)	No effect	

Note: Dielectric strength is the average of 10 tests, no single reading less than 5kVAC.

Headquarters:
Delfingen Industry S.A.
Zone Industrielle
25340 Anteuil
FRANCE
Phone: +33 (0)3 81 90 73 00
Fax: +33 (0)3 81 90 73 19

Production:
DELFINGEN US - New York
2221 NIAGARA FALLS BLVD
NY 14304 NIAGARA FALLS
USA
Phone: +1 716 215 03 00
Fax: +1 716 215 03 04

E-mail : delfingen@delfingen.com

<http://www.delfingen.com>