


NU-GUARD SC-P

Vehicle wiring harness protection

The flat-knit construction is made of PET monofilament and textured multifilament combination, which gives NU-GUARD SC-P a lightweight, rugged but yet smooth texture and appearance. It is then shaped cylindrical with an overlap (self closing sleeve).

The self closure construction of NU-GUARD SC-P is ideal for reworking components without disconnecting them and ensures a protection of the wires with a 90° minimum overlap. The knitted construction provides good drainage, while maintaining superior abrasion resistance.



All our sites are ISO TS16949
and ISO 14001 certified

 **DELFINGEN**
INDUSTRY

Installation


NU-GUARD SC-P is particularly suited to protect and bundle wire harnesses, cable assemblies and hoses from cutting, abrasion and chafing.

NU-GUARD SC-P is self closing and can be wrapped directly and easily on the wires. Installation specifications are available at Delfingen Quality department.

Characteristics

Physical characteristics	Norm	Unit	Value
Abrasion resistance	PSA D44 1722 ISO 6711-1 RNL D441959	-	R9 MG4
Fluids immersion	B25 1140	-	Complies
Chemical properties	Resists to automobile fluids such as fuel, oils, anti-freeze solutions, brake fluid, windscreen washer fluids...		
Continuous temperature		°C	-40 to 150
Maximum peak temperature		°C	175
Melt point		°C	255
Flammability	FMWSS 302 D 45-1333	- -	Complies B type

Dimensions

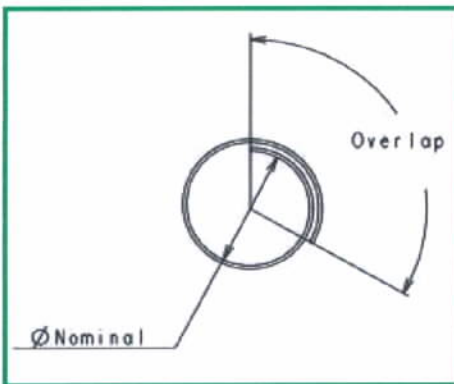

Ref	Ø Nominal (mm)	Ø Min (mm)	Ø Max (mm)	Overlap
NGSC-P5	5	1	5	90°
NGSC-P8	8	6	8	90°
NGSC-P10	10	9	10	90°
NGSC-P13	13	11	13	90°
NGSC-P16	16	14	16	90°
NGSC-P19	19	17	19	90°
NGSC-P25	25	20	25	90°
NGSC-P29	29	26	29	90°
NGSC-P32	32	30	32	90°
NGSC-P38	38	33	38	90°
NGSC-P42	42	39	42	90°

Specifications / Approvals

NU-GUARD SC-P complies with Chrysler MS-NA-1-8, Lear UTMS18009, Delphi M3569, Yazaki YPES-16-123, SAE J2192, PSA STE 96 468 709 99, Renault 36 05 035, Ford, Mazda, GME15337 and GMW14125-E-X1.

Packaging

NU-GUARD SC-P can be delivered in bulk (spools) or in cut-lengths.

Our sales department remains at your disposal for any information about packing units.

Data for information only, subject to modifications without notice

Headquarters:

Delfingen Industry S.A.
25340 Anteuil - FRANCE
Tel: +33 (0)3 81 90 73 00
Fax: +33 (0)3 81 90 73 19

delfingen@delfingen.com
www.delfingen.com

Europe, Africa & South America:

Delfingen FR-Roissy
4 Place de Londres,
Bât. Saturne BP 13716
95726 Paris Roissy CDG - FRANCE
Tel: +33 (0)1 41 84 31 00

sales-eas@delfingen.com

North & Central America:

Delfingen US, Inc.
840 West Long Lake Road
Suite 120
Troy, MI 48098 - USA
Tel: +1 248 519 0534

sales-anc@delfingen.com

Asia - Pacific:

Delfingen Asia Pacific
23F Citigroup tower
33 Huayuanshiqiao Road, Pudong District
200120 Shanghai - CHINA
Tel: +86 21 6101 0451

sales-asia@delfingen.com