



ABRASION/MECHANICAL

Expando® PT & Expando® PT Plus


Product Highlights

- Operating temperature from -70°C to 125°C (-94°F to 257°F)
- UL recognized component
- Eliminates the need for hot-knife cutting
- Does not trap heat or humidity
- Rot-free
- Self-fitting over many shapes and sizes
- Self-extinguishing when used to encase typical non-flammable wires or cables
- Cost effective



Our manufacturing sites are certified ISO 9000, QS 9000 or ISO/TS 16949 and ISO 14001

EXPPT_PTPLUS_09172010

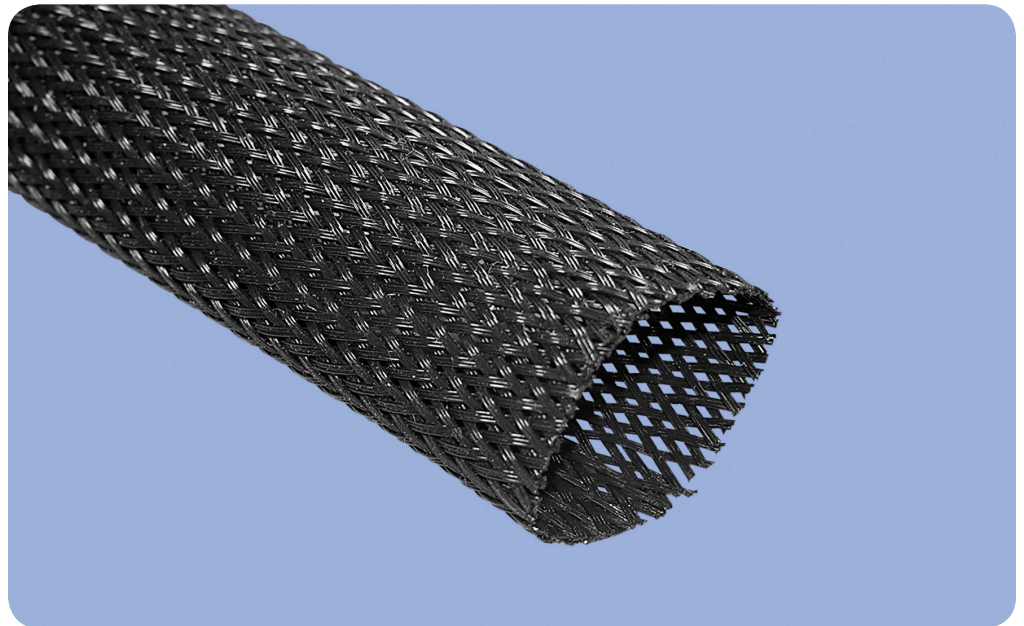

Expando® PT & Expando® PT Plus are tough, lightweight oversleeves used to protect cable assemblies, hoses and wire harnesses from chafing, cutting and abrading. The open-braid construction of Expando products enables each size to expand to fit several application shapes and diameters. This open-textile construction also makes them highly flexible and resistant to trapping water, heat and humidity.

Expando PT and Expando PT Plus are braided polyester (PET) sleeves designed for applications up to 125°C. General purpose industrial/commercial products, Expando PT and Expando PT Plus balance the properties of mechanical and thermal stability with economy.

The patented Bentley-Harris Plus treatment makes end termination neater and easier. The Plus treatment creates a webbing between the filaments of the sleeving to reduce end fray during installation and through the life of the product. Because of the fray-resistant properties of Expando PT Plus, it can be cut with ordinary scissors, which reduces assembly time and eliminates the need for proper ventilation equipment required for hot-knife cutting.

Expando PT and Expando PT Plus oversleeves have many applications in the aeronautical, marine, electronic and general manufacturing Industries. The ability of Expando PT and Expando PT Plus to retain flexibility at low temperatures make them ideal for exposed applications in weather stations, navigation beacons, radar antennas, and airborne and space systems.

BentleyHarris®
Protection Products

Performance Data – Expando® PT & Expando® PT Plus

Property	Test Method	Result
Operating Temperature Range		-70°C to +125°C (-94°F to +257°F)
Low Temperature Flexibility	MIL-DTL-23053E	-70°C
Melt Temperature	ASTM D-3418	+250°C

Product Specifications

Longitudinal shrinkage should be taken into account when utilizing expansion properties of the sleeve

Commercial Part Number	Recommended Application Range mm (in)		Maximum Weight g/m (lb/ft)	Standard Packaging m (ft)
	Min Ø	Max Ø		
Expando PT Plus 3-X Expando PT 3-X	2 (3/32")	6 (1/4")	2.62 (0.0018) 2.62 (0.0018)	610 (2,000')
Expando PT Plus 6-X Expando PT 6-X	3 (1/8")	11 (7/16")	4.32 (0.0029) 3.93 (0.0026)	305 (1,000')
Expando PT Plus 10-X Expando PT 10-X	6 (1/4")	13 (1/2")	9.90 (0.0066) 9.49 (0.0064)	152 (500')
Expando PT Plus 13-X Expando PT 13-X	6 (1/4")	19 (3/4")	12.60 (0.0085) 11.61 (0.0078)	152 (500')
Expando PT Plus 19-X Expando PT 19-X	13 (1/2")	32 (1-1/4")	19.64 (0.0132) 18.01 (0.0121)	152 (500')
Expando PT Plus 32-X Expando PT 32-X	19 (3/4")	45 (1-3/4")	26.19 (0.0176) 24.85 (0.0167)	76 (250')
Expando PT Plus 45-X Expando PT 45-X	32 (1-1/4")	70 (2-3/4")	44.20 (0.0297) 42.56 (0.0286)	76 (250')
Expando PT Plus 51-X Expando PT 51-X	38 (1-1/2")	89 (3-1/2")	54.02 (0.0363) 53.34 (0.0358)	76 (250')
Expando PT Plus 64-X Expando PT 64-X	45 (1-3/4")	114 (4-1/2")	58.17 (0.0391) 63.40 (0.0426)	76 (250')

XX = Color Code: 0 = Black 9 = Natural 6 = Blue 5 = Green
 4 = Yellow 2 = Red 3 = Orange 8 = Gray

*Expando sleeving products made with the patented "Plus" treatment should not be used in hard vacuum environments nor immersed in solvents or liquids where Plus particulates could contaminate the system environment. Consult Federal-Mogul Systems Protection for information on protection products for these applications.

Part Numbering System

Example	Product Name	Size	Color	Quantity
	Expando PT Plus	3	0 (black)	610m



USA: (1) 800 926 2472
Europe: (33) 3 44 39 06 06
Japan: (81) 45 479 0201
China: (86) 21 6182 7688

www.federalmogul.com/sp

The information and illustrations given herein are believed to be reliable. Federal-Mogul makes no warranties as to their accuracy or completeness and disclaims any liability in connection with their use. Federal-Mogul's only obligations are those in the standard term of sale for this product and Federal-Mogul will not be liable for any consequential or other damages arising out of the use or misuse of this product. Users should make their own evaluations to determine the suitability of the product for specific applications.

©2007 Federal-Mogul Systems Protection, manufacturer of Bentley-Harris protection products.