

# 16 AWG 3/C w/Steel Strength Member

90°C Rubber Cord. 600 Volts. Flexible Bare Copper Conductors. Steel Strength Member. EPDM Insulation and Neoprene Jacket.

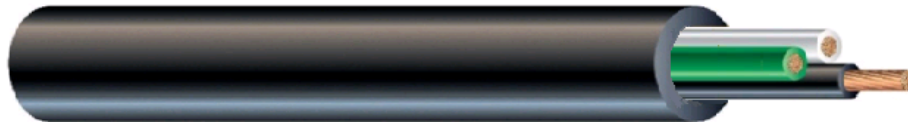


Image not to scale. See Table 1 for Dimensions

## CONSTRUCTION:

**Conductors:** Class M, Flexible stranded copper per ASTM B3 and B174.

**Insulation:** EPDM.

**Color Code:** Strength Member: Black. Conductors: Red, Orange, Brown

**Assembly:** The insulated conductors and insulated steel strength member are cabled together with fillers and a cotton braid.

**Jacket:** Black, Neoprene.

## APPLICATIONS AND FEATURES:

Applications include, but are not limited to: Wiring for industrial machinery such as washing machines and other large appliances, heavy-duty portable tools, motors and temporary electrical power.

## SPECIFICATIONS:

- ASTM B3, B174
- UL 62 - N/A
- CSA C22.2 No. 49 - N/A

## SAMPLE PRINT LEGEND:

16AWG 3/C 328881-51

### TABLE 1 - WEIGHTS & MEASUREMENTS

Stock Code	Cond. Size (AWG)	Conductor Metal	No. of Cond.	No. of Strands	Insulation Thickness (mils)	Jacket Thickness (mils)	Nominal OD (mils)	Nominal Weight (Lbs./Mft)
570311	16	Bare	3	65	31	60	535	124

All dimensions are nominal and subject to normal manufacturing tolerances



Southwire Company, LLC | One Southwire Drive, Carrollton, GA 30119 | [www.southwire.com](http://www.southwire.com)

Copyright © 2019 Southwire Company, LLC. All Rights Reserved



**Southwire**®