
YOUR SIGNATURE CONSTITUTES THAT YOU HAVE READ AND AGREED TO THIS SPECIFICATION SHEET AND UPON CONFIRMATION OF YOUR ORDER; THIS ITEM MAY BE NON-CANCELABLE AND NON-RETURNABLE.

Signature:

ate:

Company:

"This is an uncontrolled document once printed"

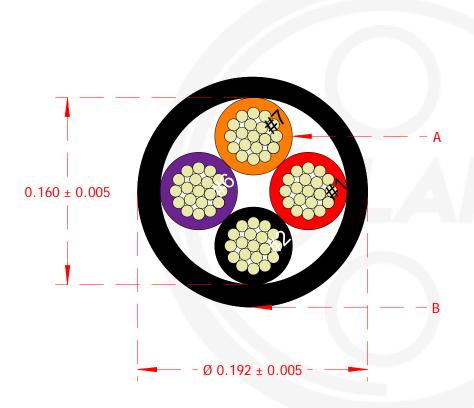

A: 18 AWG 4 Conductors 19 Strands Bare Copper

Size & Stranding: 18 AWG 19/0.010 Metal Type: Annealed Bare Copper Wire Nominal Diameter: 0.047

Insulation Type: Plenum Rated Polyvinylchloride

Nominal Insulation Thickness: 0.008 Nominal Conductor Diameter: 0.063

Color Code: Red (#1 with Black ink), Black (#2 with White ink), Violet (#6 with White ink) & Orange (#7 with Black ink)

Cable Nominal Lay Length: 2.25 Left Hand Lay (5.33 tw/ft)

B: Plenum Rated Polyvinylchloride Jacket, Nominal Jacket Thickness: 0.016, Tube / Sleeve Extruded Color: Black, Temperature Range: -20°C to 75°C

Legend: LAKE CABLE E171202 18AWG 4C 75C (UL) CL3P OR FPLP OR C(UL)US CMP FT6

"ROHS COMPLIANT" MADE IN USA

## Notes:

\* No Ripcord

\* Weight: 35 Lbs/Mft

## Standards

- \* Cable suitable for installation under NEC (NFPA 70) articles 800, 725 and 760 guidelines
- \* Cable suitable for installation in Canada under Section 60 of CEC, Part I
- \* C(UL)US listed as CMP per UL standard 444 and per CSA C22.2 No. 214-17
- \* UL listed as CL3P per UL standard 13 or FPLP per UL standard 1424
- Cable meets NFPA 262 (Steiner tunnel) flame test
- Cable meets RoHS 2002/95/EC Directive, RoHS 2 2011/65/EU Directive, RoHS 3 2015/863/EU Directive
- Cable is REACH compliant per Regulation (EC) No 1907/2006 (235) Updated June 14, 2023
- \* Operating Voltage: 300V RMS
- \* Made in the USA
- \* MARNING: This product may contain chemicals, such as Vinyl Chloride, known to the state of California to cause cancer. For more information, go to www.P65Warnings.ca.gov. Wash hands after handling

ALL SPECIFIED PARAMETERS WITHOUT A TOLERANCE ARE NOMINAL AND SUBJECT TO VERIFICATION. LAKE CABLE IS NOT RESPONSIBLE FOR UNKNOWN PERFORMANCE ATTRIBUTES THAT WERE NOT MADE KNOWN TO LAKE CABLE AT THE TIME OF DESIGN.



|   | 18 AWG 4C SGPVC O/A SGPVC JACKET   |               |   |          |          |                   |             |          |
|---|------------------------------------|---------------|---|----------|----------|-------------------|-------------|----------|
|   | All Dimensions are Shown In Inches |               | PROPRIETARY DOCUMENT THIS DRAWING MAY CONTAIN PATENTED OR PROPRIETARY INFORMATION   |          |          |                   |             |          |
| S | Third Angle Projection             |               | AND MUST NOT BE REPRODUCED, DISTRIBUTED OR USED FOR<br>MANUFACTURING WITHOUT THE WRITTEN CONSENT OF LAKE CABLE, LLC.<br>ACCEPTANCE OF THIS DRAWING WILL BE CONSTRUED AS AN AGREEMENT<br>TO AND ACCEPTANCE OF THE FOREGOING. |          |          |                   |             |          |
|   | Drawn By: JMR                      | Scale: 15 : 1 | Cust. #: -  | REV<br>- |          |                   |             |          |
|   | Reviewed By: JRV                   | Sheet: 1 of 1 | Lake's #: SP184C(19)/X1-00  | PD       | PD       | PRELIMINARY DRAFT | RIR         | 11/24/21 |
|   | Cage Code: N/A                     |               | Date Created: 11/24/21  |          | Revision | Description       | Approved By | Date     |