

# PRODUCT SPECIFICATION

DATE	REV	ECN	DESCRIPTION
7/12/2011	E		ADDED NEG. TEMP RATING

**Parent Number:** FST017-C

**Description:** 18/2 41/34 BC SPT-1 105C

**Style:** UL: SPT-1 CSA: SPT-1

**Stranding:** 41/34 BC LHL

**Insulation:** PVC

**Print Legend:** 18 AWG (0.824mm<sup>2</sup>) 2/C E54864 (PLANT ID CODE) (UL) SPT-1 105C 300V VW-1 - - - 156016 CSA SPT-1 105C 300V FT-1

**Voltage:** 300V

**Temperature:** -25C to 105C


- Notes:**
1. ONE CONDUCTOR FULLY RIBBED.
  2. INDENT PRINT ON SMOOTH CONDUCTOR.

This product complies with European Directive 2002/95/EC (RoHS)

**Customer Approval:**

**Approved By:** \_\_\_\_\_ **Date:** \_\_\_\_\_

**Title:** \_\_\_\_\_ **Company Name:** \_\_\_\_\_

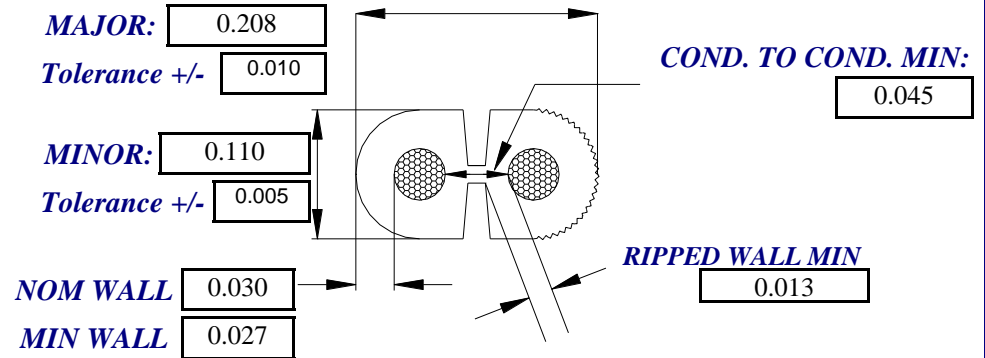

**COLEMAN CABLE**

1530 Shields Drive  
Waukegan, IL 60085

Phone: 800-323-9355



www.colemancable.com

# PRODUCT SPECIFICATION

DATE	REV	ECN	DESCRIPTION
7/12/2011	E		ADDED NEG. TEMP RATING

**Parent Number:** FST017-C

**Description:** 18/2 41/34 BC SPT-1 105C

**Style:** UL: SPT-1 CSA: SPT-1

**Stranding:** 41/34 BC LHL

**Insulation:** PVC

**Print Legend:** 18 AWG (0.824mm<sup>2</sup>) 2/C E54864 (PLANT ID CODE) (UL) SPT-1 105C 300V VW-1 - - - 156016 CSA SPT-1 105C 300V FT-1

**Voltage:** 300V

**Temperature:** -25C to 105C


- Notes:**
1. ONE CONDUCTOR FULLY RIBBED.
  2. INDENT PRINT ON SMOOTH CONDUCTOR.

This product complies with European Directive 2002/95/EC (RoHS)

**Customer Approval:**

**Approved By:** \_\_\_\_\_ **Date:** \_\_\_\_\_

**Title:** \_\_\_\_\_ **Company Name:** \_\_\_\_\_

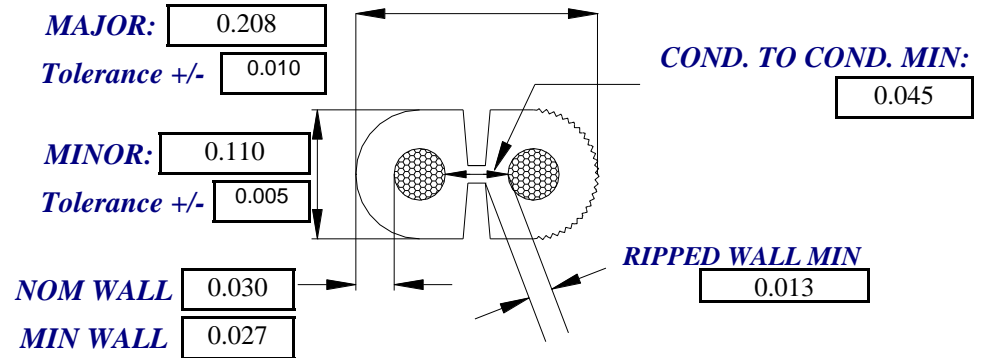

**COLEMAN CABLE**

1530 Shields Drive  
Waukegan, IL 60085

Phone: 800-323-9355



www.colemancable.com