


PRODUCT SPECIFICATION

<i>DATE</i>	<i>REV</i>	<i>ECN</i>	<i>DESCRIPTION</i>
7/2/2010	E	#13004	SPECIFICATION UPDATED

Parent Number: F10043-

Description: 10 19/.0234 TC AWM 3075/3231 SEW-2
Braided Silicone

DIAMETER: 0.207
TOLERANCE ± : 0.002

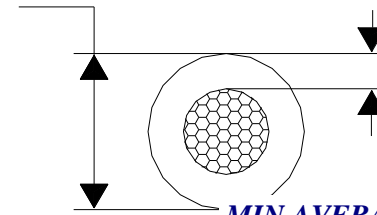

MIN AVERAGE WALL: 0.045

MINIMUM WALL: 0.040

Stranding: 19/.0234 TC LHL

Style: UL: AWM 3075/3231 CSA: SEW-2

Insulation: Braided Silicone

Print Legend: 10 AWG (5.261mm²) E96824 (PLANT ID CODE) (AWM LOGO) AWM 3075/3231 200C 600V -- 156016 CSA SEW-2 200C 600V FT1

Voltage: 600V

Temperature: 200C

- Notes:**
1. Diameter shown is OD under braid.
 2. The OD over the braid is approximately 0.216".

This product complies with European Directive 2002/95/EC (RoHS)

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Coleman Cable's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Coleman Cable or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Coleman Cable's standard terms and conditions contained therein, including without limitation Coleman Cable's standard warranty. Coleman cable disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable.

Customer Approval:

Customer Part Nbr(s): _____

Approved By: _____ **Date:** _____

Title: _____ **Company Name:** _____

COLEMAN CABLE, INC

1530 Shields Drive
Waukegan, IL 60085

Phone: 1-800-323-9355

www.colemancable.com

