



DESC: 18/4 ST 105C 600V	DWG NO: 42258-1 R-A
SCALE: 15x	DATE: 1/17/13
CUSTOMER: IEWC	DR. BY: DPL
	NWI P/N: FST184-014
	CUSTOMER P/N: ST1804-9/105C-NW

This document contains proprietary and confidential information of Northwire, Inc. (and its subsidiary) and shall not be used, disclosed or reproduced, in whole or in part, for any purpose without the prior written consent of Northwire, Inc. (and its subsidiary).


Disclaimer: The technical data that is made part of this document may be subject to the International Traffic in Arms Regulation (ITAR) and the Export Administration Regulations (EAR). Disclosure of technical data to Foreign Persons in the course of employment with U.S. contractors is considered an export and is subject to the ITAR and EAR export licensing requirements/regulations.

ITEM	SPECS.
A.	18 GAUGE 16x30BC BUNCHED
B.	30 MIL PVC INSULATION 105C 600V 27 MIL MIN. PVC INSULATION O.D. .110±.002" STANDARD SJT CONDUCTORS
C.	POLY FILLER
D.	TISSUE PAPER SEPARATOR
E.	60 MIL PRESSURED PVC JACKET 105C 600V 48 MIL MIN. PVC JACKET WHITE JACKET UL APPROVED AND CSA CERTIFIED

ELECTRICAL REQUIREMENTS:
NONE SPECIFIED

MECHANICAL REQUIREMENTS:
NONE SPECIFIED

CORE DIMENSIONS FOR INTERNAL USE ONLY

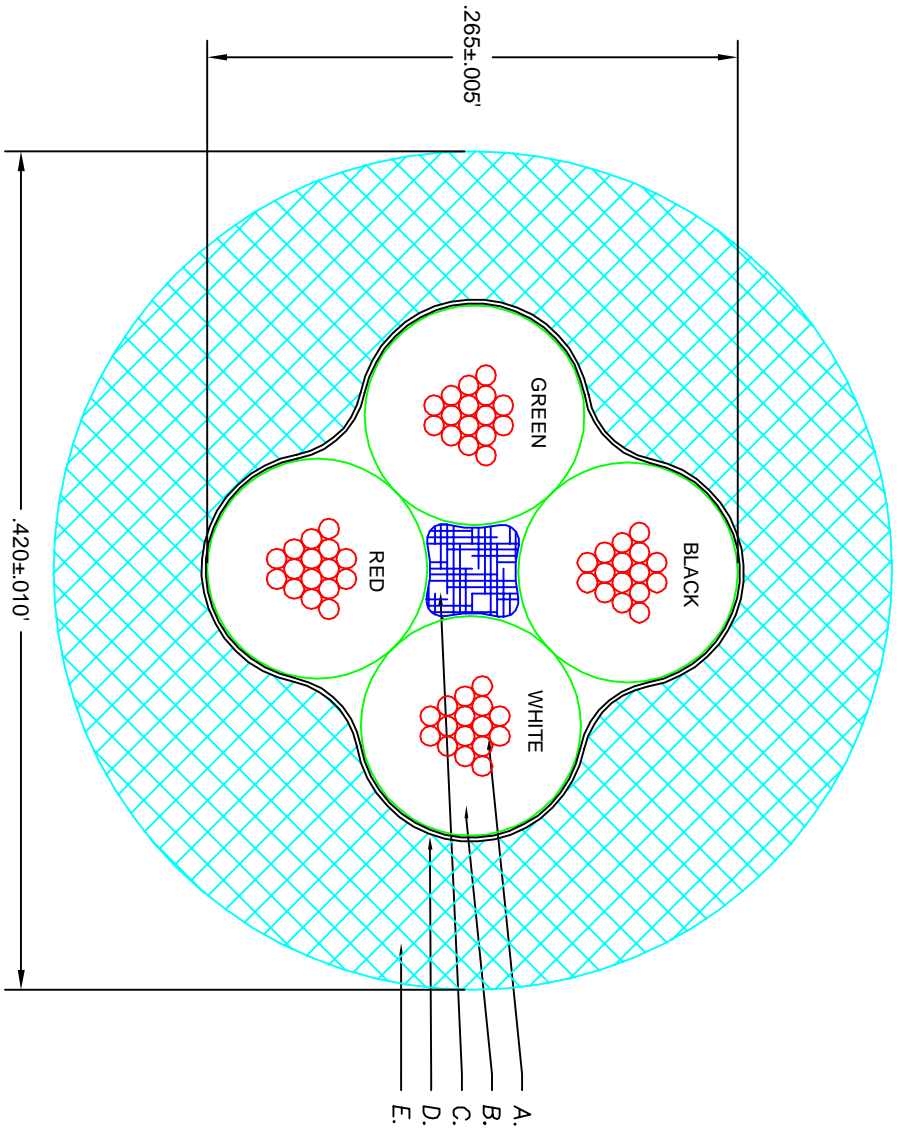

INITIAL RELEASE	REVISION RECORD
A	1/17/13 DPL
REV	REV DATE APR 1 APR 2 QA R