



DESC: 18/4 ST 105°C 600V

DWG NO: 1804T004

SCALE: 15x DATE: 12/22/03 DR. BY: DP LANGER

NWI NO: FST184-007


CUSTOMER: INDUSTRIAL ELECTRIC

CUSTOMER P/N: ST1804S-0/105C

ITEM	SPECS.
A.	18 GAUGE 16x30BC BUNCHED NOM. O.D. .049±.003"
B.	30 MILS PVC INSULATION 105°C 600V 27 MILS MIN. PVC INSULATION NOM. O.D. .110±.002"
C.	OPAQUE MYLAR WRAP 20% MIN. OVERLAP 100% COVERAGE
D.	20 GAUGE 7x.0121TC DRAIN
E.	ALUMINUM FOIL SHIELD, FOIL IN 25% MIN. OVERLAP 100% COVERAGE
F.	60 MILS PRESSURED PVC JACKET 105°C 600V 48 MILS MIN. PVC JACKET BLACK JACKET UL AND CSA APPROVED

NORTHWIRE RESTRICTED

This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.

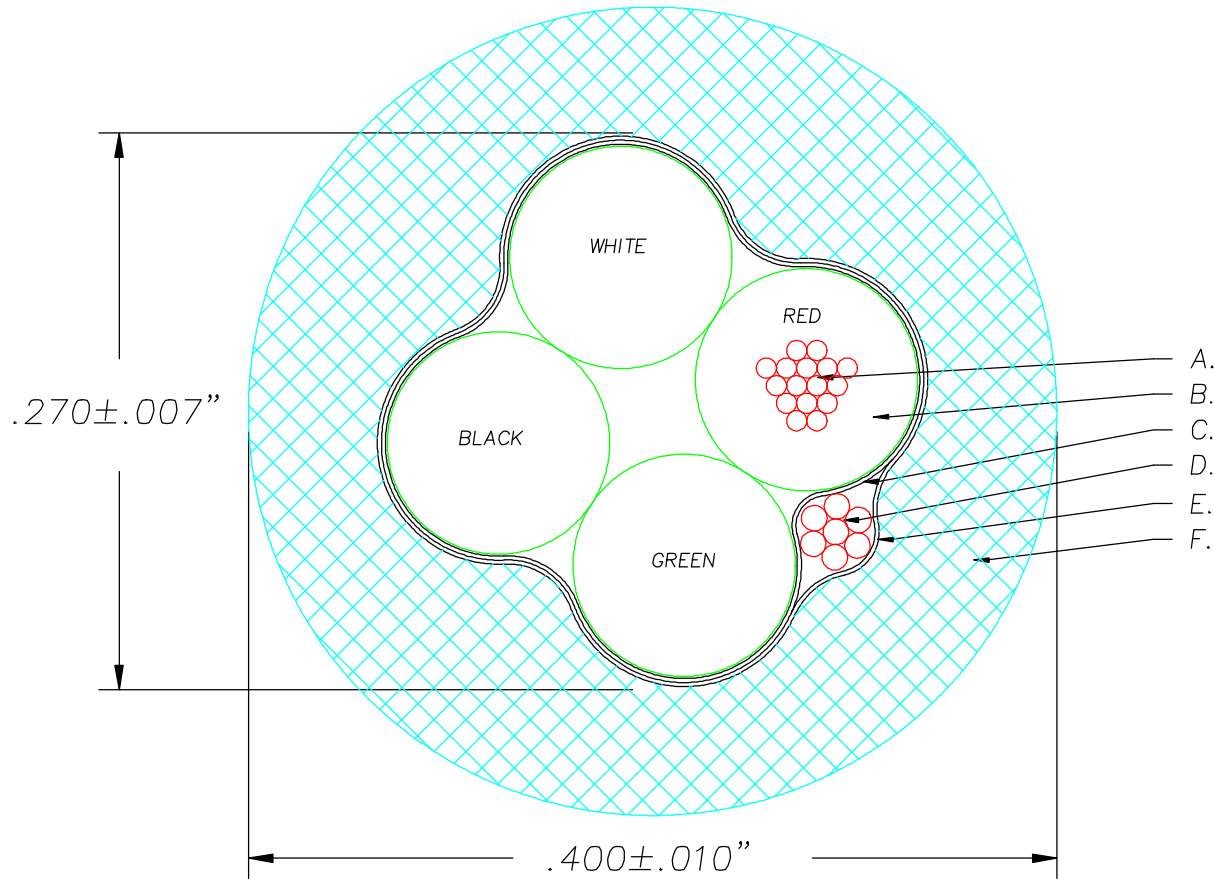

ELECTRICAL REQUIREMENTS:
NONE SPECIFIED

MECHANICAL REQUIREMENTS:
NONE SPECIFIED

INITIAL RELEASE	A	12/22/04	DPL	
REVISION RECORD	REV	REV DATE	APPROVAL	APPROVAL