

REV	ECN NO	REVISIONS	DRN	CKD	APP	QA	CM	DATE
A	18943	NEW RELEASE	KAL	WSL	CW	LP	JN	6-20-14

# 5 18 AWG Cond Portable Cord

**Conductors:** 18 AWG 16/.0010" Tinned Copper Anti-Capillary with Silicone Blocking Agent

**Insulation:** PVC Oil Resistant, Flame Retardant  
 Thickness: .031" Nominal  
 Diameter: .109" Nominal


**Color Code:** White, Black, Violet, Gray, Green

**Cable:** 5 Conductors with non woven tape separator for ease of stripability

**Jacket:** Black PVC Jacket UL- QMTT2 Qualified to UL62 STOOW  
 Oil and Moisture resistant  
 FT-2 Flame Retardancy  
 Weather Resistant with 720 hour sunlight resistant approval  
 -40C UL Cold Bend  
 Thickness: .065" Nominal  
 Jacket Color: Black

**Cable Diameter:** .436" Nominal

**Approvals:** UL STOOW, Canadian cUL, 600 Volt 90°C, FT-2  
 UL Tested for Resistance to: UV, Oil inner and Oil Jacket, moisture

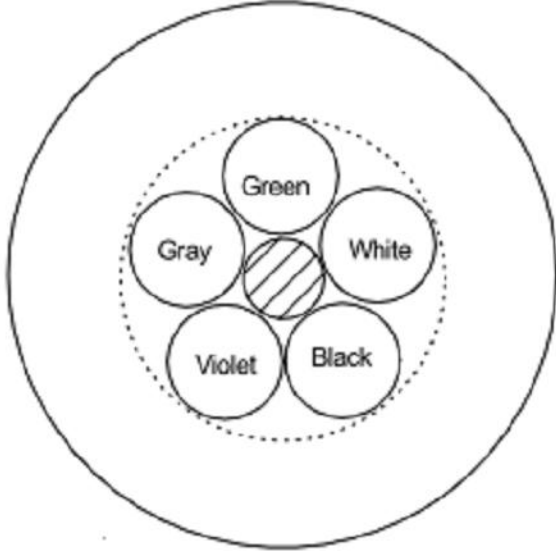

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT.		
SCALE: DRAWING SCALE ALL DIM'S IN: INCHES (MM)	DRAWING NUMBER 9000-SSL-0010-EX	REV A
TOLERANCES: UNLESS OTHERWISE SPECIFIED FRACTIONS: ±1/64 DECIMALS (.XX): ±.01 DECIMALS (.XXX): ±.005 DECIMALS (.XXXX): ±.0005 ANGLES: ±1°	TITLE 5 CONDUCTOR ANTI CAP	
FINISH: N/A	MATERIAL N/A	
FSCM 83330	1501 ROUTE 34 SOUTH FARMINGDALE, NJ 07727	
SHEET 1 OF 1 FAMILY TABLE:		