


CUSTOMER: P/N: 18/3-SVTBNH REV. APPROVED BY:

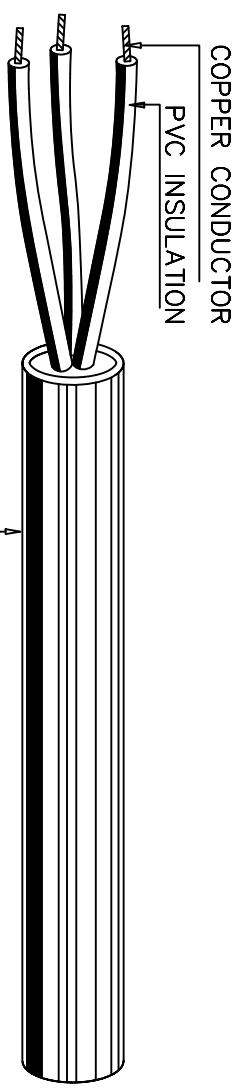


| ITEMS | RESULTS | REMARKS |
|--------------------------------|----------------------|----------------------------|
| NO OF STRANDS | 41 | SOFT COPPER |
| DIAM OF EACH CONDUCTOR | 0.160MM | |
| DIAM OF STRAND CONDUCTOR | 1.18MM | |
| CROSS SECTION AREA | 0.824MM ² | |
| MINIMUM AVERAGE THICKNESS | 0.38MM | PVC |
| MINIMUM THICKNESS AT ANY POINT | 0.33MM | |
| INSULATION DIAMETER | 2.1MM±0.15MM | COLOR: BLACK, WHITE, GREEN |
| MINIMUM AVERAGE THICKNESS | 0.76MM | PVC |
| MINIMUM THICKNESS AT ANY POINT | 0.58MM | |
| OVERALL DIAMETER | 6.3MM±0.2MM | |
| COLOR | BLACK | |

SURFACE MARKING:
(UL) SVT E90165 105°C VW-1 18AWGX3C C-UL TYPE SVT 105°C 18AWGX3C FT2 LL57855

PRODUCT SPECIFICATION :
(1) COLOR : BLACK WIRE COLOR: BLACK WHITE GREEN
(2) CABLE : SVT 18AWG*3C 105°C APPROVAL: UL-C-UL

| REVISIONS | | |
|-----------|-------------|------------|
| REV. | DESCRIPTION | DATE |
| Δ | | 2005.05.26 |
| Δ | | |
| Δ | | |
| Δ | | |
| Δ | | |

- NOTES:
1. POLYURETHANE PACKAGING
2. 1000 FT PER REEL

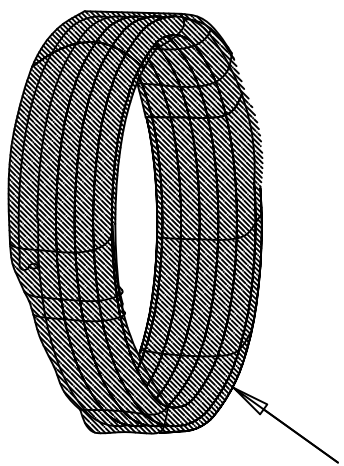

1000 FT PER REEL

| | | |
|-------------------|-----------|--|
| ENGINEER | SIGNATURE | <p>QUAIL ELECTRONICS, INC. http://www.quail.com</p> |
| MANAGER | | |
| CHECKED BY: | | |
| DRAWN BY: | | |
| PRODUCT NO: | | DATE: 2005.5.26 |
| UNIT: mm | | SHEET: 1 OF 1 |
| DWG NO: 0096-0335 | | REV. A |