


SXL/GXL/TXL

HDT/GPT/TWP/SXL/GXL/TXL

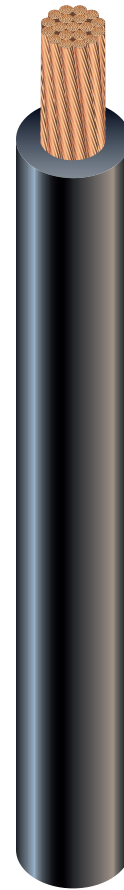

APPLICATIONS Suitable for use as follows:

- For use in general purpose low tension applications in surface vehicle electrical systems

CONSTRUCTION

- Southwire's SXL/ GXL/ TXL is manufactured using stranded bare or tinned copper conductors with cross-linked polyethylene insulation

MARKINGS

- SXL - Special Purpose Cross-Linked
- GXL - General Purpose Cross-Linked
- TXL - Thin Wall Purpose Cross-Linked

WEIGHTS, MEASUREMENTS AND PACKAGING

SIZE AWG	NUMBER OF STRANDS	INSULATION THICKNESS		NOMINAL OVERALL DIAMETER		NET WEIGHT	
		mm	inches	mm	inches	kg/km	lbs/Mft
20	7	.58	.023	2.13	.084	9.35	6.28
20	7	.41	.016	1.8	.071	7.91	5.31
18	16	.58	.023	2.37	.093	13.69	9.2
18	16	.47	.019	2.14	.084	12.54	8.43
18	16	.79	.031	2.72	.107	15.67	10.53
16	19	.62	.025	2.67	.105	16.65	11.19
16	19	.84	.033	3.13	.123	19.62	13.19
16	19	.62	.025	2.69	.106	16.82	11.3
16	19	.46	.018	2.36	.093	14.95	10.05
14	19	.58	.023	3	.118	25.46	17.11
14	19	.41	.016	2.64	.104	23.22	15.61
14	19	.94	.037	3.71	.146	30.79	20.69
12	19	.66	.026	3.5	.138	36.21	24.34
12	19	.46	.018	3.1	.122	33.22	22.32
12	19	.98	.039	4.14	.163	41.63	27.98
10	19	.83	.033	4.56	.18	62.22	41.81
10	19	.56	.022	4.03	.159	57.1	38.38

Stranded Bare
or Tinned Copper
Conductors
with Cross-linked
Polyethylene Insulation

125°C, 50 Volts