

“Stay Connected” with



Solar Power Components


a PennEngineering® Company

ALL NEW PRODUCTS!

## HEYClip™ Stainless Steel SunRunner® 2-S Series Cable Clips

For Rail-less Systems

| PANEL THICKNESS CLAMPING RANGE |     |         |     | WIRE DIA. RANGE |          | PART NO. | DESCRIPTION               | FOOTPRINT A x B |             | REAR TAB LENGTH |      |
|--------------------------------|-----|---------|-----|-----------------|----------|----------|---------------------------|-----------------|-------------|-----------------|------|
| Minimum                        |     | Maximum |     | in.             | mm.      |          |                           | in.             | mm.         | in.             | mm.  |
| in.                            | mm. | in.     | mm. |                 |          | in.      | mm.                       |                 |             |                 |      |
| <b>SunRunner 2-S</b>           |     |         |     |                 |          |          |                           |                 |             |                 |      |
| .05                            | 1,3 | .12     | 3,0 | .30 - .47       | 7,6-12,0 | S6448    | SunRunner 2-S 100 Pack    | 1.14 x .50      | 29,0 x 12,7 | .68             | 17,3 |
|                                |     |         |     |                 |          | S6488    | SunRunner 2-S Bulk        |                 |             |                 |      |
| <b>SunRunner 2-S-EZ</b>        |     |         |     |                 |          |          |                           |                 |             |                 |      |
| .12                            | 3,0 | .25     | 6,4 | .30 - .47       | 7,6-12,0 | S6449    | SunRunner 2-S-EZ 100 Pack | 1.14 x .50      | 29,0 x 12,7 | .68             | 17,3 |
|                                |     |         |     |                 |          | S6489    | SunRunner 2-S-EZ Bulk     |                 |             |                 |      |

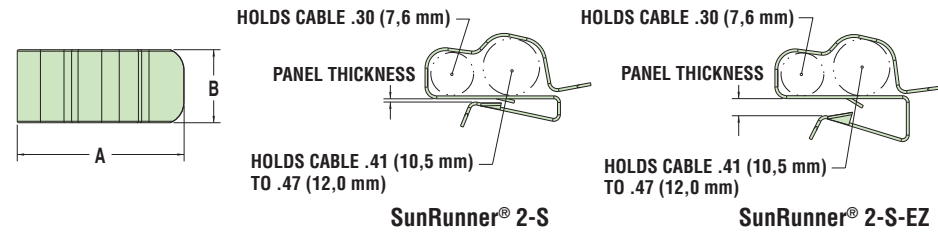


## HEYClip™ SunRunner® CT Cable Tie Mounting Platforms

Stainless Steel Edge Clip

NEW and IMPROVED

| MAX CABLE TIE WIDTH    |     | PANEL THICKNESS CLAMPING RANGE |     |     |     | INSERT POINTS | PART NO. | DESCRIPTION              | FOOTPRINT A x B |             | REAR TAB LENGTH |      |
|------------------------|-----|--------------------------------|-----|-----|-----|---------------|----------|--------------------------|-----------------|-------------|-----------------|------|
| Minimum                |     | Maximum                        |     | in. | mm. |               |          |                          | in.             | mm.         | in.             | mm.  |
| in.                    | mm. | in.                            | mm. |     |     | in.           | mm.      | in.                      |                 |             |                 |      |
| <b>SunRunner CT</b>    |     |                                |     |     |     |               |          |                          |                 |             |                 |      |
| .31                    | 8,0 | .06                            | 1,5 | .12 | 3,0 | 4             | S6434    | SunRunner CT 100 Pack    | 1.05 x .63      | 26,7 x 16,0 | .77             | 19,5 |
|                        |     |                                |     |     |     |               | S6474    | SunRunner CT Bulk        |                 |             |                 |      |
| <b>SunRunner CT-EZ</b> |     |                                |     |     |     |               |          |                          |                 |             |                 |      |
| .31                    | 8,0 | .12                            | 3,0 | .25 | 6,4 | 4             | S6435    | SunRunner CT-EZ 100 Pack | 1.06 x .63      | 26,9 x 16,0 | .77             | 19,5 |
|                        |     |                                |     |     |     |               | S6475    | SunRunner CT-EZ Bulk     |                 |             |                 |      |

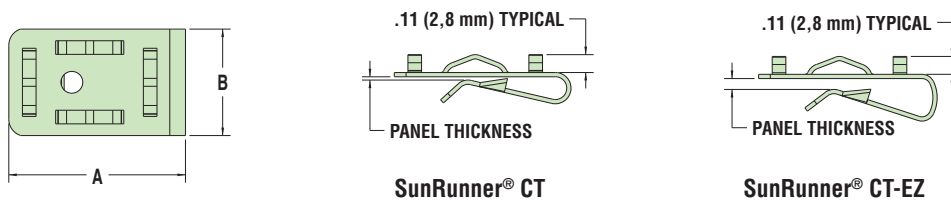

Material .020" thick heat treated 410 stainless steel (2-S & 2-S-EZ)  
 .025" Thick 304 stainless steel (CT & CT-EZ)


Certifications Certified by UL for Compliance with both Canadian and US Requirements under File E54523



- Designed to hold Micro-Inverter Cables .413" (10,5 mm) to .472" (12,0 mm) and Module Cables up to .300" (7,6 mm) in diameter for rail-less mounting systems.
- Constructed from heat treated 410 stainless steel for excellent strength and corrosion protection for outdoor exposure.
- Smooth clip edges prevent damage to cable installation.
- Designed for panel and cable retention up to 15 lbs.
- Neatly dress cables on PV panels or module frames from .050" (1,3 mm) to .250" (6,4 mm) thick.



- Designed to easily mount to module or frame extrusions without the need for mounting holes or adhesives.
- Designed to be used with Heyco Stainless Steel Cable Ties up to .31" (8,0 mm) width or Heyco SunBundler Stainless Steel Wire Cable Ties.
- **Can now accommodate Nylon 6 & 12 cable ties.**
- Hold cable bundles parallel or perpendicular to the mounting frame.
- Generous lead-in for installation without tools.
- Constructed from corrosion resistant 304 stainless steel.
- SunRunner CT-EZ designed for thicker module frames as well as racking systems - accommodates profiles up to .250" (6,4 mm) thick.
- UL Listed per UL 1565.

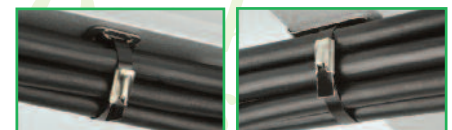

Mount Parallel or Perpendicular