

HEYClip™ Nylon UVX* SunRunner® 2 Series Cable Clips for Micro-Inverter Cables

*Extended UV Protection

PANEL THICKNESS CLAMPING RANGE				WIRE DIA. RANGE		PART NO.	DESCRIPTION	FOOTPRINT		REAR TAB LENGTH	
Minimum		Maximum		in.	mm.			in.	mm.	in.	mm.
in.	mm.	in.	mm.			in.	mm.				
SunRunner 2 UVX											
.08	2,0	.25	6,4	.30 - .47	7,6-12,0	S6463	SunRunner 2 UVX 100 Pack	.50 x 1.44	12,7 x 36,6	.94	23,9
						S6473	SunRunner 2 UVX Bulk				
SunRunner 2-R UVX											
.38	9,7	.38	9,7	.30 - .47	7,6-12,0	S6462	SunRunner 2-R UVX 100 Pack	.50 x 1.44	12,7 x 36,6	.56	14,2
						S6472	SunRunner 2-R UVX Bulk				
SunRunner 2-U UVX											
.25	6,4	.25	6,4	.30 - .47	7,6-12,0	S6461	SunRunner 2-U UVX 100 Pack	.50 x 1.44	12,7 x 36,6	.53	13,5
						S6471	SunRunner 2-U UVX Bulk				



- Designed to hold Micro-Inverter cables .413" to .472" (10,5 to 12,0 mm) in diameter.
- Constructed from extended protection nylon UV material for **lower cost**, excellent strength, and corrosion protection from outdoor exposure.
- Smooth clip edges prevent damage to cable insulation.
- “S” hook clip design will fit a wide variety of extruded aluminum profiles.
- **SunRunner 2 UVX** is designed for solar mounting frames such as the ones used by Unirac, Solar Mount and Mounting Systems.
- **SunRunner 2-R UVX** is designed for racking systems such as the ones used by Haticon Solar and S:FLEX.
- **SunRunner 2-U UVX** features a shorter “S” hook for Unirac and other similar frame profiles.
- Neatly dresses cables on PV panels or along mounting frame channels from .080" (2,0 mm) to .250" (6,4 mm) thick.
- Molded from UV/Heat Stabilized Nylon.
- See page 1-11 for typical rack profile applications.




SunRunner 2 UVX



SunRunner 2-R UVX



SunRunner 2-U UVX

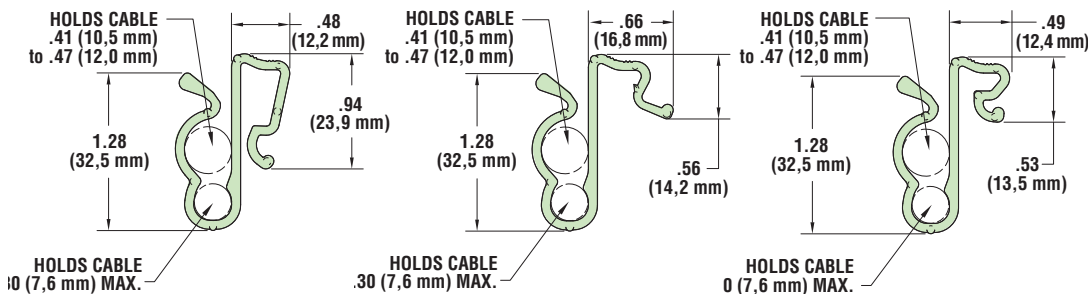

Material: Nylon 6/6 with extended UV capabilities
 Flammability Rating: 94V-2
 Temperature Range: -4°F (-18°C) to 185°F (85°C)

Quick Specs