


For Heyco's complete line of Nylon Cable Ties & Platforms, see pages 7-64 thru 7-69 in Heyco Catalog 117

## Heyco® Stainless Steel Cable Ties

Ball Lock Stainless Steel Strip Cable Ties – Standard and PVC Coated

| PART SPECIFICATIONS   |       |                      |       | PART NO.       |                  | DESCRIPTION   | PART DIMENSIONS |               |         |     |
|-----------------------|-------|----------------------|-------|----------------|------------------|---------------|-----------------|---------------|---------|-----|
| Min. Tensile Strength |       | Max. Bundle Diameter |       | Standard Steel | PVC Coated Black |               | A Length        |               | B Width |     |
| Lbs.                  | N     | in.                  | mm.   |                |                  | in.           | mm.             | in.           | mm.     |     |
| <b>AISI 304</b>       |       |                      |       |                |                  |               |                 |               |         |     |
| 112                   | 500   | 1.18                 | 30,0  | <b>12801</b>   | <b>12801B</b>    | NTSS-0150-46A | 5.91            | 150,0         | .18     | 4,6 |
|                       |       | 2.05                 | 52,0  | <b>12802</b>   | <b>12802B</b>    | NTSS-0200-46A | 7.87            | 200,0         |         |     |
|                       |       | 2.68                 | 68,0  | <b>12803</b>   | <b>12803B</b>    | NTSS-0250-46A | 9.84            | 250,0         |         |     |
|                       |       | 3.23                 | 82,0  | <b>12805</b>   | <b>12805B</b>    | NTSS-0300-46A | 11.81           | 300,0         |         |     |
|                       |       | 3.86                 | 98,0  | <b>12806</b>   | <b>12806B</b>    | NTSS-0350-46A | 13.78           | 350,0         |         |     |
|                       |       | 4.33                 | 110,0 | <b>12808</b>   | <b>12808B</b>    | NTSS-0400-46A | 15.75           | 400,0         |         |     |
|                       |       | 5.75                 | 146,0 | <b>12810</b>   | <b>12810B</b>    | NTSS-0500-46A | 19.69           | 500,0         |         |     |
|                       |       | 7.09                 | 180,0 | <b>12812</b>   | <b>12812B</b>    | NTSS-0600-46A | 23.62           | 600,0         |         |     |
|                       |       | 9.50                 | 240,0 | <b>12814</b>   | <b>12814B</b>    | NTSS-0800-46A | 31.50           | 800,0         |         |     |
|                       |       | 250                  | 1115  | 2.05           | 52,0             | <b>12821</b>  | <b>12821B</b>   | NTSS-0200-79A |         |     |
| 2.68                  | 68,0  |                      |       | <b>12822</b>   | <b>12822B</b>    | NTSS-0250-79A | 9.84            | 250,0         |         |     |
| 3.23                  | 82,0  |                      |       | <b>12824</b>   | <b>12824B</b>    | NTSS-0300-79A | 11.81           | 300,0         |         |     |
| 3.86                  | 98,0  |                      |       | <b>12825</b>   | <b>12825B</b>    | NTSS-0350-79A | 13.78           | 350,0         |         |     |
| 4.33                  | 110,0 |                      |       | <b>12827</b>   | <b>12827B</b>    | NTSS-0400-79A | 15.75           | 400,0         |         |     |
| 5.75                  | 146,0 |                      |       | <b>12829</b>   | <b>12829B</b>    | NTSS-0500-79A | 19.69           | 500,0         |         |     |
| 7.09                  | 180,0 |                      |       | <b>12831</b>   | <b>12831B</b>    | NTSS-0600-79A | 23.62           | 600,0         |         |     |
| 8.27                  | 210,0 |                      |       | <b>12833</b>   | <b>12833B</b>    | NTSS-0700-79A | 27.56           | 700,0         |         |     |
| 9.50                  | 240,0 |                      |       | <b>12834</b>   | <b>12834B</b>    | NTSS-0800-79A | 31.50           | 800,0         |         |     |
| 12.09                 | 307,0 |                      |       | <b>12836</b>   | <b>12836B</b>    | NTSS-1000-79A | 39.37           | 1000,0        |         |     |
| <b>AISI 316</b>       |       |                      |       |                |                  |               |                 |               |         |     |
| <b>NEW PRODUCT</b>    |       |                      |       |                |                  |               |                 |               |         |     |
| 112                   | 500   | 1.18                 | 30,0  | <b>12851</b>   | <b>12851B</b>    | NTSS-0150-46B | 5.91            | 150,0         | .18     | 4,6 |
|                       |       | 2.05                 | 52,0  | <b>12852</b>   | <b>12852B</b>    | NTSS-0200-46B | 7.87            | 200,0         |         |     |
|                       |       | 2.68                 | 68,0  | <b>12853</b>   | <b>12853B</b>    | NTSS-0250-46B | 9.84            | 250,0         |         |     |
|                       |       | 3.23                 | 82,0  | <b>12855</b>   | <b>12855B</b>    | NTSS-0300-46B | 11.81           | 300,0         |         |     |
|                       |       | 3.86                 | 98,0  | <b>12856</b>   | <b>12856B</b>    | NTSS-0350-46B | 13.78           | 350,0         |         |     |
|                       |       | 4.33                 | 110,0 | <b>12858</b>   | <b>12858B</b>    | NTSS-0400-46B | 15.75           | 400,0         |         |     |
|                       |       | 5.75                 | 146,0 | <b>12860</b>   | <b>12860B</b>    | NTSS-0500-46B | 19.69           | 500,0         |         |     |
|                       |       | 7.09                 | 180,0 | <b>12862</b>   | <b>12862B</b>    | NTSS-0600-46B | 23.62           | 600,0         |         |     |
|                       |       | 9.50                 | 240,0 | <b>12864</b>   | <b>12864B</b>    | NTSS-0800-46B | 31.50           | 800,0         |         |     |
|                       |       | 250                  | 1115  | 2.05           | 52,0             | <b>12871</b>  | <b>12871B</b>   | NTSS-0200-79B |         |     |
| 2.68                  | 68,0  |                      |       | <b>12872</b>   | <b>12872B</b>    | NTSS-0250-79B | 9.84            | 250,0         |         |     |
| 3.23                  | 82,0  |                      |       | <b>12874</b>   | <b>12874B</b>    | NTSS-0300-79B | 11.81           | 300,0         |         |     |
| 3.86                  | 98,0  |                      |       | <b>12875</b>   | <b>12875B</b>    | NTSS-0350-79B | 13.78           | 350,0         |         |     |
| 4.33                  | 110,0 |                      |       | <b>12877</b>   | <b>12877B</b>    | NTSS-0400-79B | 15.75           | 400,0         |         |     |
| 5.75                  | 146,0 |                      |       | <b>12879</b>   | <b>12879B</b>    | NTSS-0500-79B | 19.69           | 500,0         |         |     |
| 7.09                  | 180,0 |                      |       | <b>12881</b>   | <b>12881B</b>    | NTSS-0600-79B | 23.62           | 600,0         |         |     |
| 8.27                  | 210,0 |                      |       | <b>12883</b>   | <b>12883B</b>    | NTSS-0700-79B | 27.56           | 700,0         |         |     |
| 9.50                  | 240,0 |                      |       | <b>12884</b>   | <b>12884B</b>    | NTSS-0800-79B | 31.50           | 800,0         |         |     |
| 12.09                 | 307,0 |                      |       | <b>12886</b>   | <b>12886B</b>    | NTSS-1000-79B | 39.37           | 1000,0        |         |     |

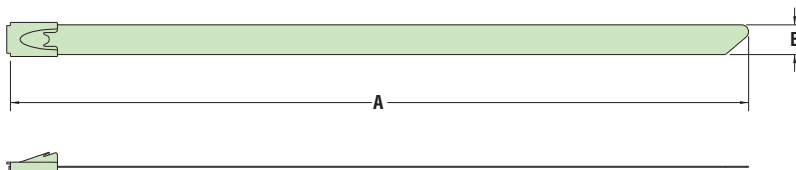

Materials AISI 304 or 316 stainless steel with PVC coating



- For ease of assembly, position locking head so that the widest end is down.
- Part Description Key: NTSS-XXXX-YYA where XXXX = length (mm) and YYA = width (mm) with A indicating AISI 304 stainless steel and B indicating AISI 316 stainless steel.
- Stainless steel cable ties have more strength and better durability than nylon cable ties.
- Locking ball design for maximum holding strength and ease of installation.
- Coated ties offer additional protection and separation of dissimilar metals for improved corrosion resistance.
- Suitable for harsh outdoor environments; conform to standard IEC92 for Marine Electrical Appliances and the requirements of CB1113-85 “Plastic Covered Metal Cable Ties”, “Steel Sea Boats Construction Level Standard.”
- Secure bundles in moist and high temperature environments with decay, fire, corrosion, and radio resistance.
- Widely used in shipping, communication, and flight applications.
- .010" (0,25 mm) thick.
- Custom lengths available.
- 100 pack standard.



For SunRunner CT Mounting Platform details, see page 1-8.

Quick Specs