

“Stay Connected” with



Solar Power Components

a PennEngineering® Company



Heyco® Nytye® Nylon Cable Tie Variations

PART SPECIFICATIONS				PART NO.		DESCRIPTION	PART DIMENSIONS			
Max. Tensile Strength	Max. Bundle Diameter	Natural	UV Black				A Length	B Width		
Lbs.	N	in.	mm.			in.	mm.	in.	mm.	

Low Profile

65	289	5.91	150	13294	13294B	NTLP-65-097	19.68	500	.35	9,0
----	-----	------	-----	-------	--------	-------------	-------	-----	-----	-----

Releasable

40	178	1.38	35,0	13297	13297B	RNT-40-059	5.94	151	.14	3,5
50	222	1.97	50,0	13301	13301B	RNT-50-079	7.95	202	.18	4,5
100	444	2.87	73,0	13302	13302B	RNT-100-098	9.84	250	.30	7,5

Screw Mount


Screw Mount		Screw Size									
18	80	.87	22,0	13307	-	MNT-18-044	4.41	112	.10	2,5	#4 screw
40	178	1.38	35,0	13308	-	MNT-40-067	6.69	170	.14	3,6	#8 screw
50	222	1.75	44,4	13309*	-	MNT-150	8.00	203	.19	4,8	#10 screw
		1.97	50,0	13309	-	MNT-50-086	8.66	220	.17	4,3	

Identification


Identification		Marking Area W x L												
		in.	mm.	in.	mm.									
18	80	.87	22,0	13316	-	NTID-18-039	3.94	100	.10	2,5	.31	8,0	1.00	25,4

Standard color natural and UV Black. Consult Heyco for heat-stabilized material and colors.


*cURus

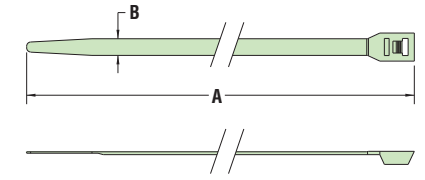


Low Profile

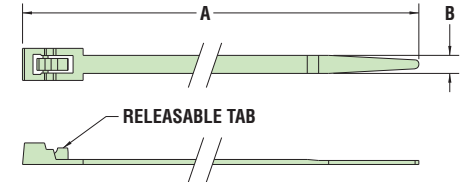

Releasable

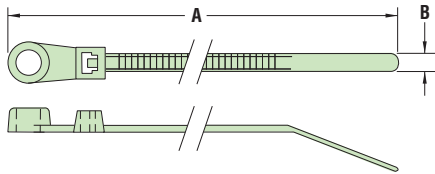

Screw Mount

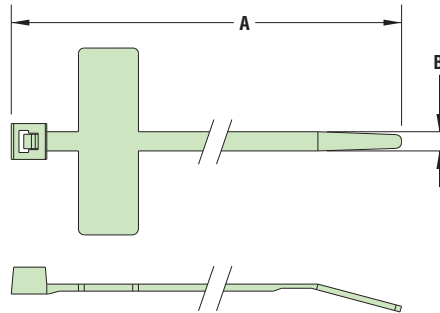

Identification

Material	Nylon 6/6
Certifications	cUL _{US} Certified by Underwriters' Laboratories for compliance with both Canadian and US Requirements under File E54523 (Releasable and Screw Mount Nytyes only)
Flammability Rating	94V-2
Temperature Range	32°F (0°C) to 185° F (85° C)

Quick Specs