

Heyco® Nytye® Mounting Platforms

Flat Platforms – Adhesive Back Mount

- Multiple sizes, strengths, and mounting options anchor Nytyes® securely.
- Five Types:
 - 1) Flat - Adhesive-Back and Screw Mounts
 - 2) Saddle - Screw Mount only
 - 3) Push Mount - Arrowhead and Blind Mounts
 - 4) Snap Over Bolt
 - 5) Stainless Steel Edge Clip “SunRunner Series”
- Rubber based adhesive effective up to 158°F (70°C).
- Acrylic based adhesive effective up to 167°F (75°C).
- Apply Adhesive-Backed parts to a clean, dry surface.

MAX. TENSILE STRENGTH	ADHESIVE	INSERT POINTS	RELEASE TAB?	PART NO.	DESCRIPTION	PART DIMENSIONS						
						A		B		C		
Lbs.	N			Natural			in.	mm.	in.	mm.	in.	mm.
18	80	Rubber Acrylic	4	yes	3591 3591A	MP-050x050-ABR MP-050x050-ABA	.50	12,7	.50	12,7	.17	4,3
NEW!	40	178	4	yes	3594 3594A	MP-080x080-ABR MP-080x080-ABA	.80	20,3	.80	20,3	.19	4,8
NEW!	50	222	4	yes	3599 3599A	MP-100x100-ABR MP-100x100-ABA	1.00	25,4	1.00	25,4	.32	8,1
50	222	Rubber	2	yes	3590* 3593*	MP-110x110-ABA MP-115x115-ABA	1.10	27,9	1.10	27,9	.24	6,0
			4	yes			1.15	29,2	1.15	29,2	.26	6,6


Standard color natural. *These adhesive-backed parts are also screw mountable.

Flat Platforms – Screw Mount

MAX. TENSILE STRENGTH	SCREW SIZE	INSERT POINTS	PART NO.	DESCRIPTION	PART DIMENSIONS															
					A		B		C											
Lbs.	N	in.	mm.	Natural			in.	mm.	in.	mm.	in.	mm.								
40	178	#6	3,5	4	4264	MP-075x075-S6	.75	19,1	.75	19,1	.24	6,0								
NEW!	50	222	#8	4	4265 3589	MP-038x075-S8 MP-100x100-S8	.38	9,5	.75	19,1	.20	5,0								
													2	3580	1.10	27,9	1.10	27,9	.20	5,1
													4	3581	1.15	29,2	1.15	29,2	.22	5,6

Standard color natural.

Tensile Lbs.	Width in.	Width mm.
18	.10	2,5
40	.14	3,6
50	.19	4,8
120	.30	7,6

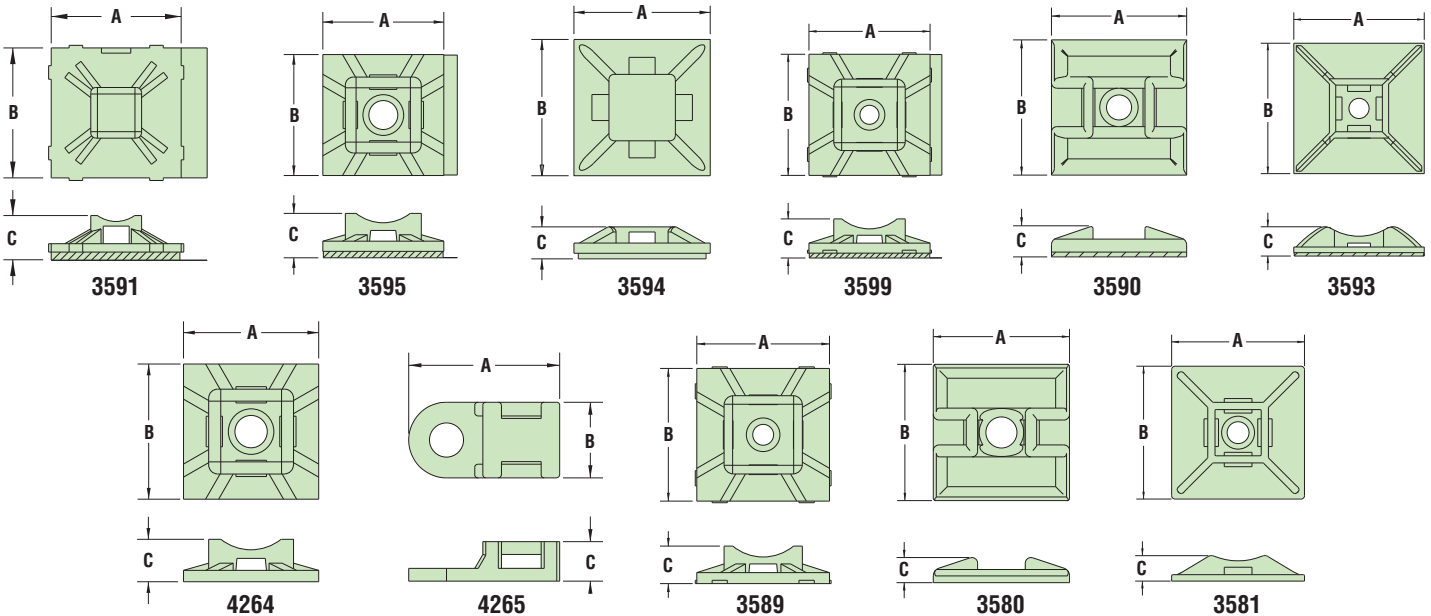

Quick Specs

Material	Nylon 6/6
Certifications	Recognized under the Component Program of Underwriters' Laboratories File E54523 (Adhesive-Back Mount parts only)
Flammability Rating	94V-2
Temperature Range	-32°F (0°C) to 158°F (70°C) (Rubber adhesive backed) -32°F (0°C) to 167°F (75°C) (Acrylic adhesive backed) 32°F (0°C) to 185°F (85°C) (Non-adhesive backed)