

“Stay Connected” with




Solar Power Components

a PennEngineering® Company

Heyco® SunStars™

Grounding Spacers for Module to Rack Applications

PART DIMENSIONS				PART NO.	DESCRIPTION
Inside Dia.		Outside Dia.			
in.	mm.	in.	mm.		
		.75	19,1	S6480	SSGS 750-320
.32	8,1	1.00	25,4	S6481	SSGS 1000-320
		1.25	31,8	S6482	SSGS 1250-320



- Create bond between PV module and racking system.
- UL Recognized to UL Standard 2703
- Universal design for quick installation. Extrusions are symmetrically opposed for maximum strength.
- Stainless steel construction for maximum durability.
- DFARS Compliant.

Material: 304 Stainless Steel
 Certifications: Recognized under the Component Program of Underwriters' Laboratories File E467241


Heyco® Steel Cable Stays

Adhesive Back Mount



PART DIMENSIONS						PART NO.	DESCRIPTION
Base Length		Base Width		Tongue Length			
in.	mm.	in.	mm.	in.	mm.		
.59	15,1	.30	7,7	.52	13,1	12143	CS-5930A
.73	18,5	.39	10,0	.76	19,2	12144	CS-7339A

- Provide a secure, yet simple fastening for cables.
- Adhesive back mount results in a very secure attachment.

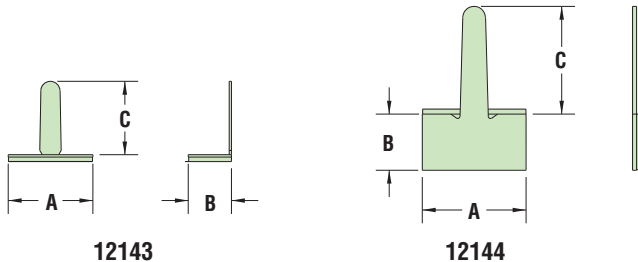

Material: Electrolytic Tin-Plated Steel with 3M Adhesive Tape
 Temperature Range: Application Temperature: 70°F (21°C) to 100°F (38°C)
 Operating Temperature: -40°F (-40°C) to 176°F (80°C)

Quick Specs