





Heyco® Original Series-35 Liquid Tight Cordgrips

Pigtail, in HEYConvenient Small Packs


CABLE DIA. RANGE				PART NO.		DESCRIPTION	SMALL PACK QTY	PART DIMENSIONS										
Minimum	Maximum	Black	Gray		*			UL or RA	A Clearance Hole Dia.	B Max. O.A. Length	C Thread Length	D Wrenching Nut Thk.		E Flat Size				
in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.	in.	mm.				
NPT Hubs - Black locknuts not included Gray see footnote*																		
.069	1.8	.187	4.7	4134	4135WN	FLEX RLTF 3/8	RA	50	.670	17.0	2.97	75.4	.53	13.5	.20	5.1	.75	19.1
.181	4.6	.312	7.9	4136	4137WN	FLEX LTF 3/8												
.170	4.3	.470	11.9	4140	4141WN	FLEX LTF 1/2	UL	50	.875	22.2	4.09	103.9	.62	15.7	.20	5.1	.95	24.1
.230	5.8	.546	13.9	4142	4143WN	FLEX LLTF 1/2	UL	50	.875	22.2	4.54	115.3	.62	15.7	.23	5.8	1.05	26.7
.250	6.4	.485	12.3	4144	4145WN	FLEX RLTF 3/4	UL	25	1.068	27.1	5.14	130.6	.63	16.0	.23	5.8	1.30	33.0
.450	11.4	.709	18.0	4146	4147WN	FLEX LTF 3/4												
PG Hubs - Unassembled nylon locknuts included																		
.064	1.6	.210	5.3	4110	4111	FLEX RLTF 7	RA	100	.492	12.5	2.44	62.0	.33	8.4	.20	5.1	.59	15.0
.114	2.9	.250	6.4	4112	4113	FLEX LTF 7												
.069	1.8	.187	4.7	4114	4115	FLEX RLTF 9	RA	50	.599	15.2	2.77	70.4	.34	8.6	.20	5.1	.75	19.1
.181	4.6	.312	7.9	4116	4117	FLEX LTF 9												
.069	1.8	.260	6.6	4118	4119	FLEX RLTF 11	RA	50	.733	18.6	3.44	87.4	.39	9.9	.20	5.1	.86	21.8
.230	5.8	.395	10.0	4120	4121	FLEX LTF 11												
.170	4.3	.450	11.4	4124	4125	FLEX LTF 13.5	UL	50	.804	20.4	3.88	98.6	.41	10.4	.20	5.1	.95	24.1
.230	5.8	.546	13.9	4128	4129	FLEX LTF 16	UL	50	.886	22.5	4.36	110.7	.45	11.4	.23	5.8	1.05	26.7
.250	6.4	.485	12.3	4130	4131	FLEX RLTF 21	UL	25	1.115	28.3	5.03	127.8	.52	13.2	.23	5.8	1.30	33.0
.450	11.4	.709	18.0	4132	4133	FLEX LTF 21												

Standard colors black and gray. For variations and larger sizes see pages 2-3 thru 2-6.
*Gray NPT cordgrips provided with assembled metal locknut.

- Flexible Pigtail™ extender prevents sharp bends and extends cable life.
- IP 68 rated.
- Widest range of approved cable diameters.
- Acme threads on body prevent skipping and speed installation.
- For use in clearance or threaded holes.
- All nylon construction with TPE sealing gland resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. (This feature is not assessed by UL.)
- Multiple sizes for flexible cord diameters ranging from .06" (1,8 mm) to .71" (18,0 mm). For variations and larger sizes, see Heyco-Tite Liquid Tight Cordgrips on pages 2-3 thru 2-6.
- PG hub threads are steel conduit threads per DIN 40430, see Section 3 of Heyco Catalog 117.
- We recommend using the cordgrip with the smallest maximum diameter that will fit your application. Cable ranges listed are for the maximum IP68 sealing range. Contact Heyco for UL approved 514B cable ranges.
- For Heyco Liquid Tight Threaded Plugs, see page 2-22.
- For our complete range of Heyco Locknuts, see pages 3-17 & 3-18.

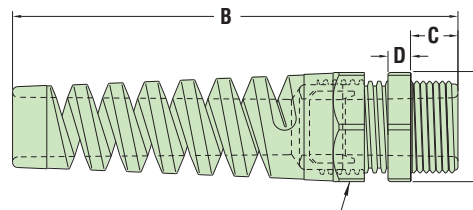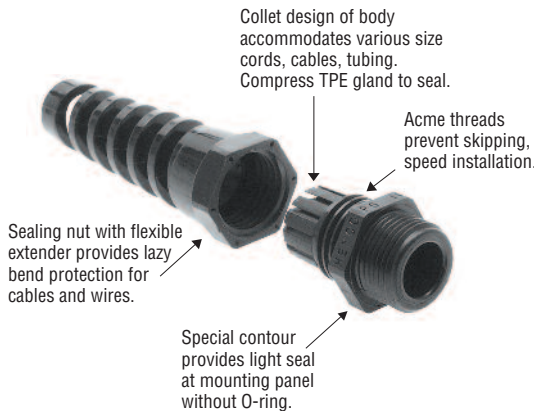

SEALING NUT WITH FLEX-PROTECTOR EXTENDER



Material	Nylon 6/6 w/TPE Sealing Gland
Certifications	<ul style="list-style-type: none"> UL Listed under Underwriters' Laboratories File E51579 RA Recognized under the Component Program of Underwriters' Laboratories File E51579 SF Certified by Canadian Standards Association File 93876C
Flammability Rating	94V-2
Temperature Range	Static -40°F (-40°C) to 239°F (115°C) Dynamic -4°F (-20°C) to 212°F (100°C)
IP Rating	IP 68 (70 PSI, 5 BAR)

Quick Specs