

Heyco® Nylon Liquid Tight Threaded Plugs

Liquid Tight, with Integral Sealing Ring
Hex Head with Slot

**NO O-RING
REQUIRED!**




| THREAD TYPE/SIZE | PART NO. | | | DESCRIPTION | PART DIMENSIONS | | | |
|---------------------|----------|------|--------------|----------------|----------------------|------|---------------------|------|
| | Black | Gray | V-0 Black | | A Wrenching Flats | | B Overall Length | |
| | | | | | in. | mm. | in. | mm. |
| NPT** | | | | | | | | |
| NPT 1/4 | 3544B | 3544 | - | LTPP NPT 1/4 | .63 | 16,0 | .66 | 16,8 |
| NPT 3/8 | 3545B | 3545 | - | LTPP NPT 3/8 | .83 | 21,1 | .69 | 17,5 |
| NPT 1/2 | 3546B | 3546 | V3546* | LTPP NPT 1/2 | .98 | 24,9 | .81 | 20,6 |
| NPT 3/4 | 3547B | 3547 | V3547* | LTPP NPT 3/4 | 1.29 | 32,8 | .86 | 21,8 |
| NPT 1* | 3548B | 3548 | V3548 | LTPP NPT 1 | 1.74 | 44,2 | 1.05 | 26,7 |
| NPT 1-1/4* | 3549B | 3549 | V3549 | LTPP NPT 1-1/4 | 2.06 | 52,3 | 1.08 | 27,4 |

Standard color black. Consult Heyco for other colors, and sizes in V-0 material.

*Not cULus

**Consult Heyco for PG and Metric threaded LTPP's.

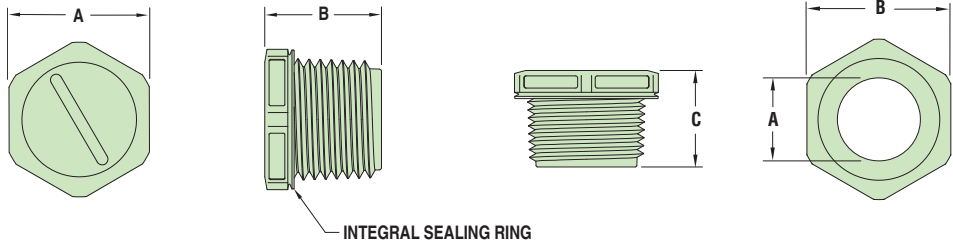

Liquid Tight Threaded Plugs

Smooth Bore Bushings

Heyco® Nylon Threaded Smooth Bore Bushings

| WILL FIT THESE INTERNALLY THREADED NPT PIPE ENDS OR PORTS | PART NO. | | DESCRIPTION | PART DIMENSIONS | | | | | |
|--|----------|------|-------------|-------------------------|------|-------------------------|------|------------------------|------|
| | Black | Gray | | A Inside Diameter | | B Wrenching Flats | | C Overall Height | |
| | | | | in. | mm. | in. | mm. | in. | mm. |
| 1/4 | 3621B | 3621 | TSB 1/4 | .31 | 7,9 | .63 | 16,0 | .66 | 16,8 |
| 3/8 | 3622B | 3622 | TSB 3/8 | .43 | 10,9 | .83 | 21,0 | .69 | 17,5 |
| 1/2 | 3623B | 3623 | TSB 1/2 | .58 | 14,7 | .98 | 24,9 | .81 | 20,6 |
| 3/4 | 3624B | 3624 | TSB 3/4 | .74 | 18,8 | 1.30 | 33,0 | .86 | 21,8 |

Standard colors black and gray.



- Convert raw-edged threaded holes to smooth insulated through holes.
- Used to protect threaded holes. Eliminate sharp edges so wires are protected.
- Insulate and mechanically protect electrical and communication cables, tubing, rope, and utility lines.
- Molded from electrically non-conductive Nylon 6/6.

| | |
|---------------------|---|
| Material | Nylon 6/6 |
| Certifications | cULus Recognized under the Component Program of Underwriters' Laboratories, File E330194 to both Canadian and U.S. Requirements (LTPP only) |
| Flammability Rating | 94V-2 |
| Temperature Range | -40°F (-40°C) to 221°F (105°C) |
| IP Rating | IP 68 (70 PSI, 5 BAR) (LTPP only) |

*Quick
Specs*