

## Heyco® Grommet Channel


### TPE “DS” Channel - Unserrated, MDS\* Filled



FIT PANEL THICKNESS RANGE				PART NO.	DESCRIPTION	PART DIMENSIONS					
Minimum		Maximum				A Overall Height	B Length				
in.	mm.	in.	mm.				in.	mm.	M.		
<b>48" (122 cm) Strip</b>				Gray							
.031	0,8	.062	1,6	<b>12430</b>	DS-062-48"	.30	7,6				
.020	0,5	.125	3,2	<b>12431</b>	DS-125-48"	.38	9,5			48	1.22
.031	0,8	.188	4,8	<b>12432</b>	DS-188-48"	.50	12,7				
.045	1,1	.250	6,4	<b>12433</b>	DS-250-48"	.63	15,9				
<b>100' (30.5 M) Roll</b>											
.031	0,8	.062	1,6	<b>12430R</b>	DS-062-1200"	.30	7,6			1200	30.5
.020	0,5	.125	3,2	<b>12431R</b>	DS-125-1200"	.38	9,5				

Standard color gray.

\*Cyanoacrylate adhesive, also known as “super glue”, features rapid setup time.

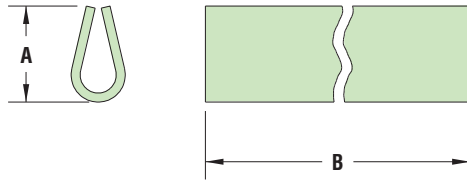


- This flexible Grommet Channel is ideal for protecting panel edges from being damaged.
- For use as wear strips, non-abrasive edging, noise-reducing conveyor strips, framing, or to protect from sharp edges.
- Good durability; MDS glue filling adheres to rubber, most plastics, wood and metal.
- Features built-in lubricant for reduced friction and longer part life.

### Polystyrene Channel - 4' (122 cm) Lengths

FIT PANEL THICKNESS	PART NO.	DESCRIPTION	PART DIMENSIONS								STYLE
			A Overall Height		B Top Width		C Bottom Width		D Length		
in.	mm.	White	in.	mm.	in.	mm.	in.	mm.	in.	cm.	
.050	<b>12443</b>	PCH-015X050-48"	.44	11,1	.02	0,4	.05	1,3			1
.141	<b>12444</b>	PCH-020X141-48"	.56	14,3	.02	0,5	.14	3,6	48	122	2
.250	<b>12445</b>	PCH-200X250-48"	.38	9,5	.20	5,1	.25	6,4			1

Standard color white.

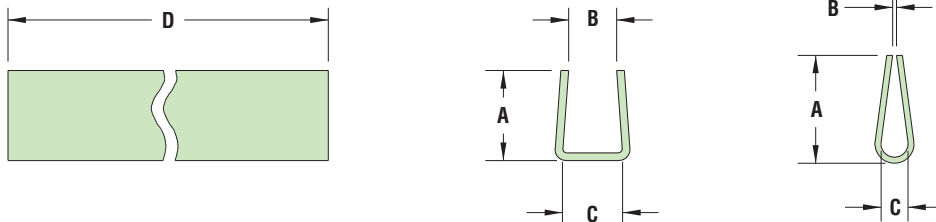

- Binds and frames sharp edges.
- May be cut to desired lengths.
- Available by special order only, consult Heyco.

Material	PA66/6 MDS Filled Nylon or High Impact Polystyrene
Flammability Rating	94HB
Temperature Range	-40°F (-40°C) to 149°F (65°C) (DS Series) -4°F (-20°C) to 122°F (50°C) (PCH Series)

Quick Specs