

“Stay Connected” with



Solar Power Components

a PennEngineering® Company

Heyco-Flex™ II Liquid Tight Tubing


Flexible, Nonmetallic Liquid Tight Electrical Tubing



TRADE SIZE	PART NO. Black	DESCRIPTION	PART DIMENSIONS				STANDARD COIL LENGTH ft/coil
			A Outside Diameter		B Inside Diameter		
			in.	mm.	in.	mm.	
1/4	8449	HF2 1/4	.57	14,4	.40	10,0	100
3/8	8450	HF2 3/8	.70	17,8	.49	12,5	
1/2	8451	HF2 1/2	.83	21,1	.63	16,1	
3/4	8452	HF2 3/4	1.04	26,4	.83	21,1	
1	8453	HF2 1	1.30	33,1	1.05	26,8	
1-1/4	8454	HF2 1-1/4	1.65	41,8	1.40	35,4	
1-1/2	8455	HF2 1-1/2	1.88	47,8	1.59	40,3	50
2	8456	HF2 2	2.36	59,9	2.03	51,6	

Standard color black.
Consult Heyco for Cut to Length Availability.

- Maximum flexibility; can be used in extremely tight quarters.
- Smooth inside for easier wire pulling.
- Lightweight and lower installed cost.
- Integral rigid and flexible PVC construction.
- Use with nylon Heyco-Flex Connectors: Straight, Snap-in, or Sweep. See pages 3-9 to 3-11.
- Also use with Quick Twist Fittings. See pages 3-13 and 3-14.
- 1/4" thru 2" trade sizes.
- Resists corrosion, oil, and water.
- UV resistant.
- Suitable for use in high vibration or flexing applications:
 - Automotive Equipment
 - Computers and Peripherals
 - Fiber Optics
 - Lab Equipment
 - Lasers
 - Office Equipment
 - Processing Control and Monitoring Equipment
 - Robotics
 - White Goods
- Passes submersion test of 70 psi.
- **Voltage Rating: 300V.**
- **Mounting brackets are available, see page 3-19.**
- **Order Part No. 8340**, HF-28 Cutting Tool, for cutting Heyco-Flex tubing and conduit cleanly and evenly.

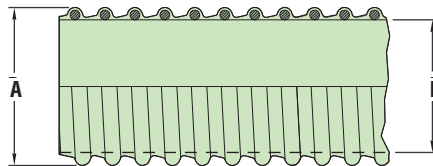

Material
Certifications

PVC
 Recognized under the Component Program of Underwriters' Laboratories File E121095
 Certified by Canadian Standards Association File 233010
 Flammability Rating
 Temperature Range

VW1
 -.4°F (-18°C) to 158°F (70°C)

Quick
Specs