




DESC: 18/2 UNJACKETED CABLE 125C 300V	DWG NO:IEWC-182
SCALE: 25x	DATE: 3/29/12
CUSTOMER: IEWC	DR. BY: DPL
	CUSTOMER P/N: T.B.D.

This document contains proprietary and confidential information of Northwire, Inc. (and its subsidiary) and shall not be used, disclosed or reproduced, in whole or in part, for any purpose without the prior written consent of Northwire, Inc. (and its subsidiary).

Disclaimer: The technical data that is made part of this document may be subject to the International Traffic in Arms Regulation (ITAR) and the Export Administration Regulations (EAR). Disclosure of technical data to Foreign Persons in the course of employment with U.S. contractors is considered an export and is subject to the ITAR and EAR export licensing requirements/regulations.

ITEM	SPECS.
A.	18 GAUGE 16X30BC BUNCHED
B.	40 MILS FOAMED XLPE INSULATION 125C 300V 35 MILS MIN. FOAMED XLPE INSULATION O.D. .128±.003" CABLE IS NOT UL OR CSA APPROVED

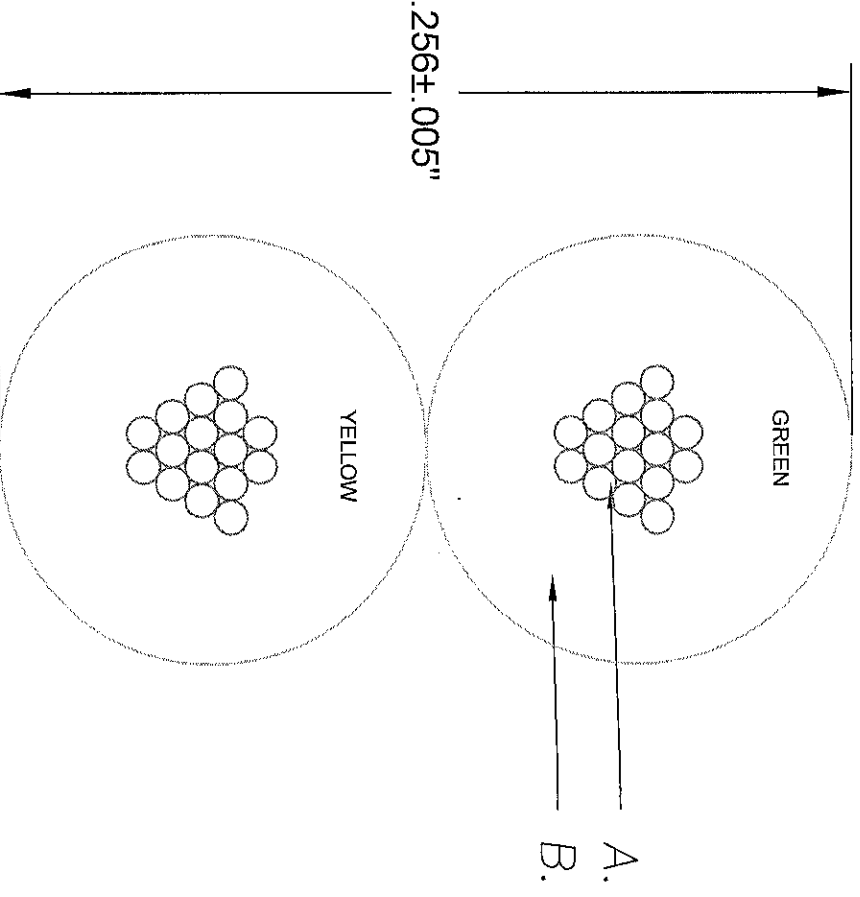

**ELECTRICAL REQUIREMENTS:**  
NONE SPECIFIED

**MECHANICAL REQUIREMENTS:**  
NONE SPECIFIED

CORE DIMENSIONS FOR INTERNAL USE ONLY

INITIAL RELEASE	1	3/29/12	DPL		
REVISION RECORD	REV	REV DATE	APR 1	APR 2	QA R