



T30R1STNLM5

Cable Tie, 30lb. 5.9" Max. Bun. Dia. 1.38" PA46 Brown 1000/pk

Article Number: 111-03027

Part Number: T30R1STNLM5


Type: T30R



Base Data

Part No.	T30R1STNLM5
Type	T30R
Color	Brown (BN)
Features	Offering improved performance in high temperature applications (opposed to standard PA66 cable ties), Heat resistance cable ties are produced in PA4.6. With the ability to operate for 10,000 hours at 150oC and have a continuous working temperature of 135oC, the products are ideal for heat risk environments. Common applications are in the electronics, rail, process machinery and military markets, where high ambient temperatures are apparent.
Application	Used to bundle and secure wire and cable.
Application Method	Quick, simple fixing by hand or with HellermannTyton tensioning tools
Identification Plate Position	none
Releasable Closure (Yes/No)	No
Tie Closure	plastic pawl
Variant	Inside Serrated

Product Dimensions

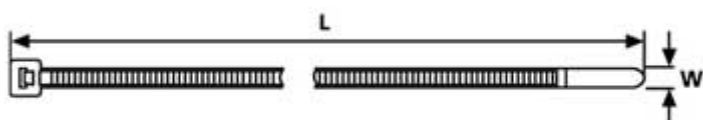

Min. Tensile 30 lbs / 135 N

Strength	
Length (L)	5.9 " / 150 mm
Width (W)	0.14 " / 3.6 mm
Min. Ø Bundle	.06 " / 1.5 mm
Max. Ø Bundle	1.38 " / 35.0 mm

Material and Specifications

Material Polyamide 4.6 (PA46)

Flammability UL94 V2

Material Specification HF / LFH

Material Specification RoHS

Operating Temperature -40 °F to +275 °F (-40 °C to +135 °C) continuous

ROHS Conformity  RoHS

Logistic and Packaging

Packaging Type bag

Pkg. Qty. 1000

Carton Qty. 5000

UPC 08930615417

Website Feedback

© HellermannTyton North America 2011 | [TS16949](#), [ISO 9001](#) and [ISO 14001](#) Certified

7930 N. Faulkner Rd. Milwaukee, WI 53224-9517 | Fax: 800-848-9866 | Phone: 800-537-1512