


Description: Three Conductor, 12 AWG,
Tray Cable With Overall PVC Jacket

Date: 5/15/2008

JM Part Number: JM55442

Reference: TC1203/PP-0-JM

Cable Diagram

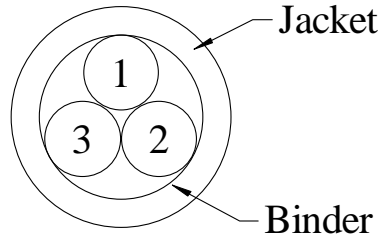

Components

Three 12 AWG Singles

Conductor: 12 AWG, 19/.0185 bare copper

Insulation: .016" wall of PVC (See Color Code)

Nylon Jacket: .005" wall of Clear Nylon

.132"

Cable Construction

Cabling: Three conductors cabled together (LHL), with fillers as necessary

Mylar: Clear Mylar tape

Jacket: .047" nominal wall of Black PVC

.382"

Print

**E73202 3/C 12 AWG 600V TYPE TC (UL) 90C DRY 75C WET SUN RES DIR BUR
 --- LL41103 CSA AWM I/II A/B 90C 600V FT1**

Color Code

1. Black and numerically printed: 1 - ONE
2. White and numerically printed: 2 - TWO
3. Red and numerically printed: 3 - THREE

Requirements

Temperature: 90°C
Voltage: 600V

Approvals: UL Type TC

Written By:	rjc	5/15/2008	Rev. 0	Initial Issue
Revised By:				
Revised By:				
Revised By:				