



Thermal Transfer Labels

PANDUIT[®]

Thermal Transfer Labels

Panduit is a global leader in reliable and innovative solutions for identification and safety. Products are engineered for a wide variety of industries and applications – including electrical, electronics, industrial, and network. Panduit offers a complete, leading-edge line of labeling software, high-performance label materials (all RoHS compliant), and printers that provide enhanced productivity, dependability, and value to all infrastructure labeling requirements.





Cable/Wire Labels

| | |
|--|-------|
| Turn-Tell® Labels | 4 |
| Self-Laminating Labels | 5 – 7 |
| LabelCore™ Fiber Optic Cable Identification System | 7 – 8 |
| Flag Labels | 8 |
| Non-Laminated Vinyl Cloth Labels | 9 |
| Non-Laminated Nylon Cloth Labels | 10 |

Marker Plates

| | |
|--|----|
| High-Temperature Flame-Retardant Marker Plates | 11 |
| Halogen-Free Flame-Retardant Marker Plates | 11 |
| Standard Marker Plates | 12 |

Heat Shrink Labels

| | |
|--|----|
| Military Grade – Single-Sided Labels | 13 |
| Military Grade – Two-Sided Labels | 14 |
| Halogen-Free – Two-Sided Labels | 15 |
| Fluid-Resistant – Two-Sided Labels | 16 |

Component Labels/Continuous Tapes

| | |
|---|---------|
| Raised Panel Labels | 17 – 20 |
| Polyester Component Labels | 21 |
| Super-Tack Polyester Component Labels | 22 |
| Tedlar® Component Labels | 23 |
| Tamper-Evident Polyester Component Labels | 23 |
| Non-Adhesive Polyester Component Labels | 24 |
| Vinyl Cloth Component Labels | 24 |
| Polyimide Component Labels | 25 |
| Paper Component Labels | 26 |
| Continuous Tapes | 26 – 28 |

Safety and Solar Labels

| | |
|---|----|
| Super-Tack Polyester Arc Flash Labels | 29 |
| Raised Panel Arc Flash Labels | 29 |
| Super-Tack Arc Flash Continuous Tapes | 30 |
| Super-Tack Polyester Facility Identification Labels | 30 |
| Polyester Photoluminescent Tapes | 31 |
| Raised Panel Solar Labels | 31 |
| Over-Laminate Labels | 32 |
| Super-Tack Polyester Solar Labels | 32 |
| Reflective Continuous Tapes for Solar Applications | 32 |

Software/Printers/Accessories

| | |
|---|----|
| Software | 33 |
| TDP43ME Printers, Accessories and Ribbons | 34 |
| TDP43HE & TDP46HE Printers, Accessories & Ribbons | 35 |

Tedlar is a registered trademark of E.I. du Pont de Nemours and Company.

Turn-Tell® Labels



- Allows labels to rotate for visibility from any angle, and allows repositioning on the wire/cable to align legends for improved aesthetics

- Ideal for use in high-density or space-constrained cable applications
- Use thermal transfer hybrid ribbon
- Temperature range: -40°F to 150°F (-40°C to 66°C)



| Part Number | Print-On Area Color | Width | | Length | | Print-On Area Height | | Min. Cable O.D. | | Max. Cable O.D. | | Wire Range | Labels Per Row | Std. Pkg. Qty. |
|-------------|---|-------|------|--------|-------|----------------------|------|-----------------|-----------|-----------------|------|---|----------------|----------------|
| | | In. | mm | In. | mm | In. | mm | In. | mm | In. | mm | | | |
| R050X075V1T | White | 0.50 | 12.7 | 0.75 | 19.1 | 0.25 | 6.4 | 0.12 | 3.1 | 0.16 | 4.0 | Cat. 6 28 AWG/ 18 – 14 AWG | 8 | 5000 |
| R050X125V1T | | | | 1.25 | 31.8 | 0.38 | 9.7 | 0.16 | 4.1 | 0.22 | 5.6 | Cat. 3 UTP/12 – 10 AWG | | |
| R050X150V1T | | | | 1.50 | 38.1 | 0.50 | 12.7 | 0.22 | 5.6 | 0.28 | 7.1 | Cat. 5e UTP/Cat. 6 UTP/ Cat. 6A UTP/Cat. 5e FTP/ 10 – 6 AWG | | |
| R100X075V1T | TIA Blue TIA Green TIA Gray TIA Red TIA Yellow White TIA Blue TIA Green TIA Gray TIA Red TIA Yellow | 1.00 | 25.4 | 0.75 | 19.1 | 0.25 | 6.4 | 0.12 | 3.1 | 0.16 | 4.0 | Cat. 6 28 AWG/ 18 – 14 AWG | 4 | 2500 |
| R100X125V1T | | | | 1.25 | 31.8 | 0.38 | 9.7 | 0.16 | 4.1 | 0.22 | 5.6 | Cat. 3 UTP/12 – 10 AWG | | |
| R100X150V1T | | | | 1.50 | 38.1 | 0.50 | 12.7 | 0.22 | 5.6 | 0.28 | 7.1 | Cat. 5e UTP/Cat. 6 UTP/ Cat. 6A UTP/ | | |
| R100X150V2T | | | | | | | | | | | | | | |
| R100X150V3T | | | | | | | | | | | | | | |
| R100X150V4T | | | | 2.25 | 57.2 | 0.75 | 19.1 | 0.28 | 7.1 | 0.39 | 9.9 | Cat. 6 FTP/Cat. 6 UTP/ Cat. 6A FTP/8-4 AWG | | |
| R100X150V7T | | | | | | | | | | | | | | |
| R100X150V8T | | | | | | | | | | | | | | |
| R100X225V1T | | | | 4.00 | 101.6 | 1.00 | 25.4 | 0.39 | 9.9 | 0.95 | 24.1 | 2 – 1 AWG | | |
| R100X225V2T | | | | | | | | | | | | | | |
| R100X225V3T | | | | | | | | | | | | | | |
| R100X225V4T | | | | 1.50 | 38.1 | 0.50 | 12.7 | 0.22 | 5.6 | 0.28 | 7.1 | Cat. 5e UTP/Cat. 6 UTP/ Cat. 6A UTP/Cat. 5e FTP/ 10 – 6 AWG | | |
| R100X225V7T | | | | | | | | | | | | | | |
| R100X225V8T | | | | | | | | | | | | | | |
| R100X400V1T | | | | 2.00 | 50.8 | 0.75 | 19.1 | 0.28 | 7.1 | 0.39 | 9.9 | Cat. 6 FTP/Cat. 6A UTP/ Cat. 6A FTP/8 – 4 AWG | | |
| R150X150V1T | | | | | | | | | | | | | | |
| R200X150V1T | | | | | | | | | | | | | | |
| R200X225V1T | 4.00 | 101.6 | 1.00 | 25.4 | 0.39 | 9.9 | 0.95 | 24.1 | 2 – 1 AWG | | | | | |
| R200X400V1T | | | | | | | | | | | | | | |

Order number of labels required in multiples of Standard Package Quantity.
Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Vinyl Self-Laminating Labels

- Includes a colored print-on area and clear overlamine to protect the legend for clear and durable identification
- Sized specifically for wire and cable applications
- Thin and conformable; preferred material for most general wire/cable labeling

- Use thermal transfer hybrid ribbon
- Temperature range: -40°F to 150°F (-40°C to 66°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15-01, File # MH14979



| Part Number | Print-On Area Color | Width | | Length | | Print-On Area Height | | Min. Cable O.D. | | Max. Cable O.D. | | Wire Range | Labels Per Row | Std. Pkg. Qty. | |
|---------------|---------------------|--|------|--------|------|----------------------|------|-----------------|------|-----------------|------|--|-------------------------------|----------------|------|
| | | In. | mm | In. | mm | In. | mm | In. | mm | In. | mm | | | | |
| S050X075VA1Y | White | 0.50 | 12.7 | 0.75 | 19.1 | 0.25 | 6.4 | 0.08 | 2.0 | 0.16 | 4.1 | Cat. 6 28 AWG/ 18 – 14 AWG | 8 | 5000 | |
| S050X075VATY* | | | | | | | | | | | | | | | 2500 |
| S050X125VA1Y | | | | 1.25 | 31.8 | 0.38 | 9.7 | 0.12 | 3.1 | 0.28 | 7.0 | Cat. 3 UTP/ 12 - 10 AWG | 5000 | | |
| S050X125VATY* | | | | | | | | | | | | | | | |
| S050X150VA1Y | | | | 1.50 | 38.1 | 0.50 | 12.7 | 0.16 | 4.0 | 0.32 | 8.1 | Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/ 10 – 6 AWG | | | |
| S050X150VATY* | | | | 2.50 | 63.5 | 1.00 | 25.4 | 0.32 | 8.1 | 0.48 | 12.1 | 6 – 2 AWG | | | |
| S050X250VATY* | | 0.75 | 19.1 | 0.75 | 19.1 | 0.25 | 6.4 | 0.08 | 2.0 | 0.16 | 4.0 | Cat. 6 28 AWG/ 18 – 14 AWG | 5 | 5000 | |
| S075X075VATY* | | | | | | | | | | | | | | | |
| S075X100VATY* | | | | 1.25 | 31.8 | 0.38 | 9.7 | 0.12 | 3.1 | 0.28 | 7.0 | Cat. 3 UTP/ 12 - 10 AWG | | | |
| S075X125VATY* | | | | | | | | | | | | | | | |
| S075X150VATY* | | | | 1.50 | 38.1 | 0.50 | 12.7 | 0.16 | 4.0 | 0.32 | 8.1 | Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/ 10 – 6 AWG | | | |
| S100X075VA1Y | | TIA Blue TIA Brown TIA Green TIA Gray TIA Orange TIA Purple | 1.00 | 25.4 | 0.75 | 19.1 | 0.25 | 6.4 | 0.08 | 0.50 | 2.0 | 4.0 | Cat. 6 28 AWG/ 18 – 14 AWG | 4 | 2500 |
| S100X075VATY* | | | | | | | | | | | | | | | |
| S100X125VA1Y | | | | | 1.25 | 31.8 | 0.38 | 9.7 | 0.12 | 3.1 | 0.28 | 7.0 | Cat. 3 UTP/ 12 - 10 AWG | 5000 | |
| S100X125VATY* | | | | | | | | | | | | | | | |
| S100X150VA1Y | 1.50 | | | | 38.1 | 0.50 | 12.7 | 0.16 | 4.0 | 0.32 | 8.1 | Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/10 - 6 AWG | | | |
| S100X150VATY | | | | | | | | | | | | | | | |
| S100X150VBTY | | | | | | | | | | | | 2500 | | | |
| S100X150VCTY | | | | | | | | | | | | 5000 | | | |
| S100X150VDTY | | | | | | | | | | | | 2500 | | | |
| S100X150VETY | | | | | | | | | | | | 5000 | | | |
| S100X150VFTY | | | | | | | | | | | | 5000 | | | |
| S100X150VGTY | | | | | | | | | | | | 5000 | | | |

Order number of labels required in multiples of Standard Package Quantity.

*Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Vinyl Self-Laminating Labels (continued)

| Part Number | Print-On Area Color | Width | | Length | | Print-On Area Height | | Min. Cable O.D. | | Max. Cable O.D. | | Wire Range | Labels Per Row | Std. Pkg. Qty. | | | | |
|---------------|---------------------|-------|-------|--------|------|----------------------|------|-----------------|------|-----------------|------|---|----------------|----------------|--|------|-----------|---|
| | | In. | mm | In. | mm | In. | mm | In. | mm | In. | mm | | | | | | | |
| S100X150VHTY* | TIA Red | 1.00 | 25.4 | 1.50 | 38.1 | 0.50 | 12.7 | 0.16 | 4.0 | 0.32 | 8.1 | Cat. 5e UTP/ Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG | 4 | 5000 | | | | |
| S100X150VITY* | TIA Yellow | | | | | | | | | | | | | | | | | |
| S100X150V0TY* | Black | | | | | | | | | | | | | | | | | |
| S100X150V9TY* | Gold | | | | | | | | | | | | | | | | | |
| S100X225VA1Y | White | | | | | | | | | | | | | | | | | |
| S100X225VATY* | White | | | | | | | | | | | | | | | | | |
| S100X225VBTY* | TIA Blue | | | | | | | | | | | | | | | | | |
| S100X225VCTY* | TIA Brown | | | | | | | | | | | | | | | | | |
| S100X225VDTY* | TIA Green | | | | | | | | | | | | | | | | | |
| S100X225VETV* | TIA Gray | | | | | | | | | | | | | | | | | |
| S100X225VFY* | TIA Orange | | | | | | | | | | | | | | | | | |
| S100X225VGT* | TIA Purple | | | | | | | | | | | | | | | | | |
| S100X225VHTY* | TIA Red | | | | | | | | | | | | | | | | | |
| S100X225VITY* | TIA Yellow | | | | | | | | | | | | | | | | | |
| S100X225V0TY* | Black | | | | | | | | | | | | | | | | | |
| S100X225V9TY* | Gold | | | | | | | | | | | | | | | | | |
| S100X250VA1Y | White | | | 1.00 | 25.4 | 2.50 | 63.5 | 1.00 | 25.4 | 0.32 | 8.1 | | | | 0.48 | 12.1 | 6 - 2 AWG | 4 |
| S100X250VATY* | | 5000 | | | | | | | | | | | | | | | | |
| S100X400VA1Y | | 4.00 | 101.6 | | | 1.00 | 25.4 | 0.32 | 8.1 | 0.95 | 24.3 | 2 - 1 AWG | 1000 | | | | | |
| S100X400VATY* | | 2500 | | | | | | | | | | | | | | | | |
| S100X650VA1Y | | 6.50 | 165.1 | | | 1.50 | 38.1 | 0.48 | 12.1 | 1.59 | 40.4 | 1/0 - 250 MCM | 250 | | | | | |
| S100X650VATY* | | 1000 | | | | | | | | | | | | | | | | |
| S150X150VATY* | | White | 1.50 | | | 38.1 | 1.50 | 38.1 | 0.50 | 12.7 | 0.16 | 4.0 | 0.32 | 8.1 | Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG | 2 | 5000 | |
| S150X225VATY* | | | | | | | 2.25 | 57.2 | 0.75 | 19.1 | 0.24 | 6.1 | 0.48 | 12.1 | 8 - 4 AWG | | 2500 | |
| S150X400VATY* | | | | | | | 4.00 | 101.6 | 1.00 | 25.4 | 0.32 | 8.1 | 0.95 | 24.1 | 2 - 1 AWG | | | |
| S200X150VATY* | | White | 2.00 | | | 50.8 | 1.50 | 38.1 | 0.50 | 21.7 | 0.16 | 4.0 | 0.32 | 8.1 | Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG | 2 | 5000 | |
| S200X225VA1Y | 2.25 | | | 57.2 | 0.75 | | 19.1 | 0.24 | 6.1 | 0.48 | 12.1 | Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 - 4 AWG | 500 | | | | | |
| S200X225VATY* | 2.50 | | | 63.5 | 1.00 | | 25.4 | 0.32 | 8.1 | 0.48 | 12.1 | 6 - 2 AWG | 1000 | | | | | |
| S200X250VATY* | 4.00 | | | 101.6 | 1.00 | | 25.4 | 0.32 | 8.1 | 0.95 | 24.3 | 2 - 1 AWG | 500 | | | | | |
| S200X400VA1Y | 4.00 | | | 101.6 | 1.00 | | 25.4 | 0.32 | 8.1 | 0.95 | 24.3 | 2 - 1 AWG | 1000 | | | | | |
| S200X400VATY* | 250 | | | | | | | | | | | | | | | | | |
| S200X650VA1Y | 6.50 | | | 165.1 | 1.50 | | 38.1 | 0.48 | 12.1 | 1.59 | 40.4 | 1/0 - 250 MCM | 1000 | | | | | |
| S200X650VATY* | | | | | | | | | | | | | | | | | | |

Order number of labels required in multiples of Standard Package Quantity.

*Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

PVDF Self-Laminating Labels

- Self-extinguishing material and recommended alternative to Tedlar®
- Sized specifically for wire and cable applications
- Use thermal transfer hybrid ribbon
- Temperature range: -65°F to 275°F (-54°C to 135°C)
- UL969 recognized File # MH14979; cUL recognized C22.2 No. 0.15.01, File # MH149799



| Part Number | Print-On Area Color | Width | | Length | | Print-On Area Height | | Min. Cable O.D. | | Max. Cable O.D. | | Wire Range | Labels Per Row | Std. Pkg. Qty. |
|-------------|---------------------|-------|------|--------|-------|----------------------|------|-----------------|-----|-----------------|------|---|----------------|----------------|
| | | In. | mm | In. | mm | In. | mm | In. | mm | In. | mm | | | |
| S050X150T1T | White | 0.50 | 12.7 | 1.50 | 38.1 | 0.50 | 12.7 | 0.16 | 4.0 | 0.32 | 8.1 | Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 - 6 AWG | 8 | 5000 |
| S075X125T1T | | 0.75 | 19.1 | 1.25 | 31.8 | 0.38 | 9.7 | 0.12 | 3.1 | 0.28 | 7.0 | Cat. 3 UTP/12 - 10 AWG | 5 | |
| S100X075T1T | | 1.00 | 25.4 | 0.75 | 19.1 | 0.25 | 6.4 | 0.08 | 2.0 | 0.16 | 4.0 | Cat. 6 28 AWG/18 - 14 AWG | 4 | 2500 |
| S100X125T1T | | | | 1.25 | 31.8 | 0.38 | 9.7 | 0.12 | 3.1 | 0.28 | 7.0 | 12 - 10 AWG | | |
| S100X150T1T | | | | 1.50 | 38.1 | 0.50 | 12.7 | 0.16 | 4.0 | 0.28 | 7.1 | Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 - 6 AWG | | |
| S100X225T1T | | | | 2.25 | 57.2 | 0.75 | 19.1 | 0.24 | 6.1 | 0.48 | 12.1 | Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 - 4 AWG | | |
| S100X400T1T | | | | 4.00 | 101.6 | 1.00 | 25.4 | 0.32 | 8.1 | 0.95 | 24.3 | 2 - 1 AWG | | 2500 |
| S200X400T1T | | | | 2.00 | 50.8 | | | | | | | | | 2 |

Tedlar® is a registered trademark of E.I. du Pont de Nemours and Company.

Order number of labels required in multiples of Standard Package Quantity.

*Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

LabelCore™ Fiber Optic Cable Identification System

PATENTED

- Provides a larger labeling surface on small fiber cables and allows legends to be clearly seen
- Sleeves are made of flexible PVC material
- Locate sleeve on straight section of cable at least 2 inches from fiber boot



| Part Number | Color | Part Description | Std. Pkg. Qty. |
|-------------|--------|--|----------------|
| NWSLC-2Y | Yellow | Yellow cable identification sleeve for 2mm simplex fiber cable, 1" long, use with labels: S100X150YAJ (Laser/Inkjet); S100X150VAC (LS8E Hand-held Printer); S100X150VA1Y or S100X150VATY (Thermal Transfer Printer). | 100 |
| NWSLC-2Y-AQ | Aqua | Aqua cable identification sleeve for 2mm simplex cable, 1" long, use with labels: S100X150YAJ (Laser/Inkjet); S100X150VAC (LS8E Hand-held Printer); S100X150VA1Y or S100X150VATY (Thermal Transfer Printer). | |
| NWSLC-3Y | Orange | Orange cable identification sleeve for 3mm simplex cable, 1" long, use with labels: S100X150YAJ (Laser/Inkjet); S100X150VAC (LS8E Hand-held Printer); S100X150VA1Y or S100X150VATY (Thermal Transfer Printer). | |
| NWSLC-7Y | White | White cable identification sleeve for 3mm duplex fiber cable, 1" long, use with labels: S100X225YAJ (Laser/Inkjet); S100X225VAC (LS8E Hand-held Printer); S100X225VATY or S200X225VATY (Thermal Transfer Printer). | |

Order number of labels required in multiples of Standard Package Quantity.

LabelCore™ Fiber Optic Cable Identification System (continued)

| Part Number | Color | Part Description | Std. Pkg. Qty. |
|--------------|--------|---|----------------|
| NWSLC2-2Y | Yellow | Yellow cable identification sleeve for 2mm simplex cable, 2 inches long, use with labels: S200X150YAJ (Laser/Inkjet) or S200X150VATY (Thermal Transfer Printer). | 100 |
| NWSLC2-2Y-AQ | Aqua | Aqua cable identification sleeve for 2mm simplex cable, 2 inches long, use with labels: S200X150YAJ (Laser/Inkjet) or S200X150VATY (Thermal Transfer Printer). | |
| NWSLC2-3Y | Orange | Orange cable identification sleeve for 3mm simplex cable, 2 inches long, use with labels: S200X150YAJ (Laser/Inkjet) or S200X150VATY (Thermal Transfer Printer). | |
| NWSLC2-7Y | White | White cable identification sleeve for 3mm duplex fiber cable, 2 inches long, use with labels: S200X225YAJ (Laser/Inkjet) S200X225VATY (Thermal Transfer Printer). | |

Order number of labels required in multiples of Standard Package Quantity.

Flag Labels

- Halogen-free, white polyester flag-style marker for wire/cable labeling
- Improved legibility and more information on small wires and cables provide clearer, more complete identification
- Innovative design allows the product to be applied as a permanent adhesive label or as a repositionable non-adhesive label
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized, File # MH14576 and File # MH14979; cUL recognized C22.2 No. 0.15-01, File # MH14979



| Part Number | Width | | Height | | Print-On Area | | | | Min. Cable O.D. | | Max. Cable O.D. | | Wire Range | Std. Pkg. Qty. Roll |
|-------------|-------|------|--------|------|---------------|------|--------|------|-----------------|-----|-----------------|------|-------------|---------------------|
| | In. | mm | In. | mm | Width | | Height | | In. | mm | In. | mm | | |
| F100X150AJT | 1.00 | 25.4 | 1.50 | 38.1 | 0.88 | 22.4 | 0.75 | 19.1 | 0.12 | 3.1 | 0.20 | 5.1 | 12 – 10 AWG | 2500 |
| F100X213AJT | | | 2.13 | 54.1 | | | | | 0.32 | 8.1 | 0.38 | 9.7 | | |
| F100X300AJT | | | 3.00 | 76.2 | | | 0.09 | 2.3 | 0.28 | 7.1 | 8 – 4 AWG | | | |
| F100X363AJT | | | 3.63 | 92.2 | | | 2.00 | 50.8 | 0.20 | 5.1 | | 0.46 | 11.7 | |

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME Printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Non-Laminated Vinyl Cloth Labels

- Thin and conformable material with repositionable adhesive allows label to be removed and reused in temporary applications
- Works well on Teflon[®] coated wires*
- Use thermal transfer hybrid ribbon
- Temperature range: -40° F to 170° F (-40° C to 77° C)
- UL969 recognized, File # MH14576 and MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14576



| Part Number | Print-On Area Color | Width | | Length | | Min. Cable O.D. | | Max. Cable O.D. | | Wire Range | Labels Per Row | Std. Pkg. Qty. |
|-------------|---------------------|-------|------|--------|------|-----------------|------|-----------------|------|-------------|----------------|----------------|
| | | In. | mm | In. | mm | In. | mm | In. | mm | | | |
| N025X075CBT | White | 0.25 | 6.4 | 0.75 | 19.1 | 0.12 | 3.1 | 0.16 | 4.1 | 12 – 10 AWG | 7 | 10000 |
| N025X125CBT | | | | 1.25 | 31.8 | 0.20 | 5.1 | 0.32 | 8.1 | 10 – 6 AWG | | |
| N025X150CBT | | | | 1.50 | 38.1 | 0.24 | 6.1 | 0.40 | 10.2 | 8 – 2 AWG | | |
| N025X175CBT | | | | 1.75 | 44.5 | 0.28 | 7.1 | 0.48 | 12.2 | 6 – 1 AWG | | |
| N050X075CBT | | 0.50 | 12.7 | 0.75 | 19.1 | 0.12 | 3.1 | 0.16 | 4.1 | 12 – 10 AWG | | 10000 |
| N050X100CBT | | | | 1.00 | 25.4 | 0.16 | 4.1 | 0.24 | 6.1 | 10 – 8 AWG | | |
| N050X125CBT | | | | 1.25 | 31.8 | 0.20 | 5.1 | 0.32 | 8.1 | 10 – 6 AWG | | |
| N050X150CBT | | | | 1.50 | 38.1 | 0.24 | 6.1 | 0.40 | 10.2 | 8 – 2 AWG | | |
| N050X175CBT | | 1.75 | 44.5 | 0.28 | 7.1 | 0.48 | 12.2 | 6 – 1 AWG | 2500 | | | |
| N100X075CBT | | 1.00 | 25.4 | 0.75 | 19.1 | 0.12 | 3.1 | 0.16 | 4.1 | 12 – 10 AWG | 3 | 10000 |
| N100X125CBT | | | | 1.25 | 31.8 | 0.20 | 4.1 | 0.32 | 8.1 | 10 – 6 AWG | | 5000 |
| N100X150CBT | | | | 1.50 | 38.1 | 0.24 | 6.1 | 0.40 | 10.2 | 8 – 2 AWG | | |
| N100X175CBT | | | | 1.75 | 44.5 | 0.28 | 7.1 | 0.48 | 12.2 | 6 – 1 AWG | | 2500 |
| N150X075CBT | | 1.50 | 38.1 | 0.75 | 19.1 | 0.12 | 3.1 | 0.16 | 4.1 | 12 – 10 AWG | 1 | 5000 |

Order number of labels required in multiples of Standard Package Quantity.
 Labels are roll mounted on 3.00" cores; when using the TDP43ME Printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.
 *Teflon[®] is a registered trademark of E. I du Pont de Nemours and Company

Non-Laminated Nylon Cloth Labels

- Offer crisp, clear legends with superior legibility
- Used in flat applications and in a wrap format for wire/cable marking
- Use thermal transfer resin ribbon
- Temperature range: -65°F to 275°F (-54°C to 135°C)



| Part Number | Color | Width | | Length | | Min. Cable O.D. | | Max. Cable O.D. | | Wire Range | Labels Per Row | Std. Pkg. Qty. |
|-------------|--------|-------|------|--------|------|-----------------|-----|-----------------|------|-------------|----------------|----------------|
| | | In. | mm | In. | mm | In. | mm | In. | mm | | | |
| N050X075C1T | White | 0.50 | 12.7 | 0.75 | 19.1 | 0.12 | 3.1 | 0.16 | 4.1 | 12 – 10 AWG | 5 | 10000 |
| N050X075C2T | Yellow | | | 1.25 | 31.8 | 0.20 | 5.1 | 0.32 | 8.1 | 10 – 6 AWG | | |
| N050X125C1T | White | | | 1.50 | 38.1 | 0.24 | 6.1 | 0.40 | 10.5 | 8 – 2 AWG | | |
| N050X125C2T | Yellow | | | | | | | | | | | |
| N050X150C1T | White | | | | | | | | | | | |
| N050X150C2T | Yellow | | | | | | | | | | | |
| N100X075C1T | White | 1.00 | 25.4 | 0.75 | 19.1 | 0.12 | 3.1 | 0.16 | 4.1 | 12 – 10 AWG | 3 | 10000 |
| N100X075C2T | Yellow | | | 1.25 | 31.8 | 0.20 | 5.1 | 0.32 | 8.1 | 10 – 6 AWG | | |
| N100X125C1T | White | | | 1.50 | 38.1 | 0.24 | 6.1 | 0.40 | 10.2 | 8 – 2 AWG | | |
| N100X125C2T | Yellow | | | | | | | | | | | |
| N100X150C1T | White | | | | | | | | | | | |
| N100X150C2T | Yellow | | | | | | | | | | | |

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME Printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

High-Temperature Flame-Retardant Marker Plates

- Used for identification markers in (Class 1E) harsh environments
- Compatible with Intermediate Cross Section cable ties
- Use thermal transfer RMER4BL-A or RHER4BL-A resin ribbon
- Temperature range: -67°F to 275°F (-55°C to 135°C)



| Part Number | Color | Width | | Height | | Print-On Area Width | | Labels Per Roll | Std. Pkg. Qty. (Roll) |
|---------------|-------|-------|------|--------|------|---------------------|------|-----------------|-----------------------|
| | | In. | mm | In. | mm | In. | mm | | |
| M200X042FQT | White | 2.00 | 50.8 | 0.42 | 10.7 | 1.22 | 31.0 | 500 | 1 |
| M200X042FQT-B | | | | | | | | 2000 | |
| M200X080FQT | | | | 0.80 | 20.3 | | | 250 | |
| M200X080FQT-B | | | | | | | | 1000 | |

Order number of labels required in multiples of Standard Package Quantity.
Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Halogen-Free Flame-Retardant Marker Plates

- Used to identify wires, cables, equipment, and many other applications
- Offer crisp, clear legend with superior legibility and engineered to withstand high temperatures, harsh solvents, oils, and chemicals without over-lamination
- Compatible with Intermediate Cross Section cable ties
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 193°F (-40°C to 90°C)




| Part Number | Color | Width | | Height | | Print-On Area Width | | Labels Per Roll | Std. Pkg. Qty. (Roll) |
|---------------|-------|-------|------|--------|------|---------------------|------|-----------------|-----------------------|
| | | In. | mm | In. | mm | In. | mm | | |
| M200X042UPT | White | 2.00 | 50.8 | 0.42 | 10.7 | 1.30 | 33.0 | 500 | 1 |
| M200X042UPT-B | | | | | | | | 2000 | |
| M200X080UPT | | | | 0.80 | 20.3 | | | 500 | |
| M200X080UPT-B | | | | | | | | 2000 | |

Order number of labels required in multiples of Standard Package Quantity.
Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Standard Marker Plates

- Non-adhesive and halogen free; used to identify wires, cables, equipment, and many other applications
- Attachable in horizontal or vertical orientation. The 0.5" Plenum rated and 0.33" non-Plenum rated Hook & Loop Cable Ties can be used in hanging position

- Meets the outgassing requirements of ASTM E-595 suitable for use in air handling spaces
- Available in a variety of colors and sizes
- Use thermal transfer resin ribbon
- Temperature range: -58°F to 221°F (-50°C to 105°C)

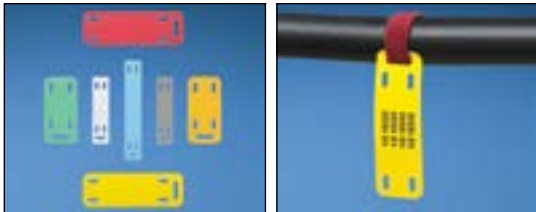

| Part Number | Color | Width | | Height | | Print-On Area Width | | Cable Type | Labels Per Roll | Std. Pkg. Qty. (Roll) |
|---------------|------------|-------|------|--------|------|---------------------|------|---------------------------------------|-----------------|-----------------------|
| | | In. | mm | In. | mm | In. | mm | | | |
| M200X050Y6T | TIA Yellow | 2.00 | 50.8 | 0.50 | 12.7 | 1.07 | 27.3 | Intermediate Cross Section Cable Ties | 500 | 1 |
| M200X050Y7T | White | | | | | | | | | |
| M200X050ACT | TIA Blue | | | | | | | | | |
| M200X050AET | TIA Green | | | | | | | | | |
| M200X050AFT | TIA Gray | | | | | | | | | |
| M200X050AGT | TIA Orange | | | | | | | | | |
| M200X050AIT | TIA Red | | | | | | | | | |
| M200X100Y6T | TIA Yellow | | | 1.00 | 25.4 | 0.80 | 20.3 | Standard Cross Section Cable Ties | 2000 | |
| M200X100Y6T-B | White | | | | | | | | 500 | |
| M200X100Y7T | White | | | | | | | | 2000 | |
| M200X100Y7T-B | White | | | | | | | | | |
| M200X100ACT | TIA Blue | 3.00 | 76.2 | 0.50 | 12.7 | 2.07 | 52.6 | Intermediate Cross Section Cable Ties | 500 | |
| M200X100AET | TIA Green | | | | | | | | | |
| M200X100AFT | TIA Gray | | | | | | | | | |
| M200X100AGT | TIA Orange | | | | | | | | | |
| M200X100AIT | TIA Red | | | | | | | | | |
| M300X050Y6T | TIA Yellow | | | | | | | | | |
| M300X050Y7T | White | | | | | | | | | |
| M300X100ACT | TIA Blue | | | | | | | | | |
| M300X100AET | TIA Green | | | | | | | | | |
| M300X100AFT | TIA Gray | | | | | | | | | |
| M300X100AGT | TIA Orange | | | | | | | | | |
| M300X100AIT | TIA Red | | | | | | | | | |

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Military Grade Single-Sided Heat Shrink Labels

- Permanent, one-piece, heat shrink sleeve designed to provide clear, durable identification of wires and cables
- Meet UL Standard 224 with a VW-1 rating for flammability and AMS-DTL-23053/5C (Class 1 and Class 3)
- Meet SAE-AS81531, MIL-STD-883F Method 2015.13, Solutions A, B, and D, and MIL-STD-202G Method 215K, Solutions A, C, and D when printed with resin and hybrid thermal transfer ribbons

- Shrink ratio 3:1
- Tested for use as an identification marker in (Class 1E) harsh environments
- Use thermal transfer hybrid ribbon or white resin ribbon
- Temperature range: -67°F to 275°F (-55°C to 135°C)
- UL224 recognized, File # E205133; CSA certified, C22.2 No. 198.1.06, File # 256205



| Part Number | Part Number | Part Number | Part Number | Diameter | | Width | | Height | | Min. Cable O.D. | | Max. Cable O.D. | | Wire Range | Labels Per Row | Labels Per Roll | Std. Pkg. Qty. (Roll) |
|--------------|-------------|-------------|-------------|----------|------|-------|------|--------|------|-----------------|------|-----------------|------|------------------|----------------|-----------------|-----------------------|
| | | | | In. | mm | In. | mm | In. | mm | In. | mm | In. | mm | | | | |
| H050X025H1T* | H050X025H2T | H050X025H3T | H050X025H4T | 0.13 | 3.1 | 0.50 | 12.7 | 0.25 | 6.4 | 0.04 | 1.0 | 0.13 | 3.3 | 22 – 18 AWG | 4 | 2000 | 1 |
| H075X025H1T* | H075X025H2T | H075X025H3T | H075X025H4T | | | 0.75 | 19.1 | | | | | | | | 2 | 1000 | |
| H100X025H1T* | H100X025H2T | H100X025H3T | H100X025H4T | | | 1.00 | 25.4 | | | | | | | | 1 | 500 | |
| H150X025H1T* | H150X025H2T | H150X025H3T | H150X025H4T | | | 1.50 | 38.1 | | | | | | | | | | |
| H200X025H1T* | H200X025H2T | H200X025H3T | H200X025H4T | | | 2.00 | 50.8 | | | | | | | | | | |
| H050X034H1T* | H050X034H2T | H050X034H3T | H050X034H4T | 0.19 | 4.7 | 0.50 | 12.7 | 0.34 | 8.6 | 0.06 | 1.5 | 0.19 | 4.8 | 18 – 12 AWG | 4 | 2000 | |
| H075X034H1T* | H075X034H2T | H075X034H3T | H075X034H4T | | | 0.75 | 19.1 | | | | | | | | 2 | 1000 | |
| H100X034H1T* | H100X034H2T | H100X034H3T | H100X034H4T | | | 1.00 | 25.4 | | | | | | | | 1 | 500 | |
| H150X034H1T* | H150X034H2T | H150X034H3T | H150X034H4T | | | 1.50 | 38.1 | | | | | | | | | | |
| H200X034H1T* | H200X034H2T | H200X034H3T | H200X034H4T | | | 2.00 | 50.8 | | | | | | | | | | |
| H050X044H1T* | H050X044H2T | H050X044H3T | H050X044H4T | 0.25 | 6.3 | 0.50 | 12.7 | 0.44 | 11.2 | 0.08 | 2.0 | 0.25 | 6.4 | 16 – 10 AWG | 4 | 2000 | |
| H075X044H1T* | H075X044H2T | H075X044H3T | H075X044H4T | | | 0.75 | 19.1 | | | | | | | | 2 | 1000 | |
| H100X044H1T* | H100X044H2T | H100X044H3T | H100X044H4T | | | 1.00 | 25.4 | | | | | | | | 1 | 500 | |
| H150X044H1T* | H150X044H2T | H150X044H3T | H150X044H4T | | | 1.50 | 38.1 | | | | | | | | | | |
| H200X044H1T* | H200X044H2T | H200X044H3T | H200X044H4T | | | 2.00 | 50.8 | | | | | | | | | | |
| H050X064H1T* | H050X064H2T | H050X064H3T | H050X064H4T | 0.38 | 9.7 | 0.50 | 12.7 | 0.64 | 16.3 | 0.13 | 3.3 | 0.38 | 9.7 | 12 – 6 AWG | 4 | 2000 | |
| H100X064H1T* | H100X064H2T | H100X064H3T | H100X064H4T | | | 1.00 | 25.4 | | | | | | | | 2 | 1000 | |
| H200X064H1T* | H200X064H2T | H200X064H3T | H200X064H4T | | | 2.00 | 50.8 | | | | | | | | 1 | 500 | |
| H050X084H1T | — | — | — | 0.50 | 12.7 | 0.50 | 12.7 | 0.84 | 21.3 | 0.17 | 4.3 | 0.50 | 12.7 | 8 – 1 AWG | 4 | 2000 | |
| H100X084H1T | H100X084H2T | H100X084H3T | H100X084H4T | | | 1.00 | 25.4 | | | | | | | | 2 | 1000 | |
| H200X084H1T | H200X084H2T | H200X084H3T | H200X084H4T | | | 2.00 | 50.8 | | | | | | | | 1 | 500 | |
| H050X165H1T | — | — | — | 1.00 | 25.4 | 0.50 | 12.7 | 1.65 | 41.9 | 0.33 | 8.4 | 1.00 | 25.4 | 4 AWG – 500 MCM | 4 | 2000 | |
| H100X165H1T | H100X165H2T | H100X165H3T | H100X165H4T | | | 1.00 | 25.4 | | | | | | | | 2 | 500 | |
| H200X165H1T | H200X165H2T | H200X165H3T | H200X165H4T | | | 2.00 | 50.8 | | | | | | | | 1 | 250 | |
| H200X240H1T | H200X240H2T | — | — | 1.50 | 38.1 | 2.00 | 50.8 | 2.40 | 61.0 | 0.50 | 12.7 | 1.50 | 38.1 | 1 AWG – 1000 MCM | 1 | 100 | |

Order number of labels required in multiples of Standard Package Quantity.
 *Available in Bulk packages (5 times Labels Per Roll), add -B to end of part number

Military Grade Two-Sided Heat Shrink Labels



- Permanent, one-piece, heat shrink sleeve designed to provide clear, durable identification of wires and cables
- Can be printed on both sides for improved visibility
- Meet the material requirements and physical properties of AMS-DTL-23053/5C (Class 1 and Class 3) and UL standard 224 with a VW-1 rating
- Meet SAE-AS81531, MIL-STD-883F Method 2015.13, Solutions A, B and D, and MIL-STD-202G Method 215K, Solutions A,C and D when printed using resin or hybrid thermal transfer ribbons
- Shrink ratio 3:1
- Tested as an identification marker for use in (Class 1E) harsh environments
- Use thermal transfer hybrid ribbon
- Temperature range: -67°F to 275°F (-55°C to 135°C)
- UL224 recognized, File # E205133; CSA certified, C22.2 No. 198.1-06, File # 256205



| Part Number | Part Number | Diameter | | Width | | Height | | Min. Cable O.D. | | Max. Cable O.D. | | Wire Range | Labels Per Row | Labels Per Roll | Std. Pkg. Qty. (Roll) |
|-----------------|-----------------|----------|------|-------|------|--------|------|-----------------|-----|-----------------|------|-----------------|----------------|-----------------|-----------------------|
| | | In. | mm | In. | mm | In. | mm | In. | mm | In. | mm | | | | |
| H100X025H1T-2 | H100X025H2T-2 | 0.13 | 3.1 | 1.00 | 25.4 | 0.25 | 6.4 | 0.04 | 1.0 | 0.13 | 3.3 | 22 – 18 AWG | 2 | 1000 | 1 |
| H100X025H1T-2-B | H100X025H2T-2-B | | | 5000 | | | | | | | | | | | |
| H200X025H1T-2 | H200X025H2T-2 | | | 2.00 | 50.8 | | | | | | | | | 500 | |
| H200X025H1T-2-B | H200X025H2T-2-B | | | 2500 | | | | | | | | | | | |
| H100X034H1T-2 | H100X034H2T-2 | 0.19 | 4.7 | 1.00 | 25.4 | 0.34 | 8.6 | 0.06 | 1.5 | 0.19 | 4.8 | 18 – 12 AWG | 2 | 1000 | |
| H100X034H1T-2-B | H100X034H2T-2-B | | | 5000 | | | | | | | | | | | |
| H200X034H1T-2 | H200X034H2T-2 | | | 2.00 | 50.8 | | | | | | | | | 500 | |
| H200X034H1T-2-B | H200X034H2T-2-B | | | 2500 | | | | | | | | | | | |
| H100X044H1T-2 | H100X044H2T-2 | 0.25 | 6.3 | 1.00 | 25.4 | 0.44 | 11.2 | 0.08 | 2.0 | 0.25 | 6.4 | 16 – 10 AWG | 2 | 1000 | |
| H100X044H1T-2-B | H100X044H2T-2-B | | | 5000 | | | | | | | | | | | |
| H200X044H1T-2 | H200X044H2T-2 | | | 2.00 | 50.8 | | | | | | | | | 500 | |
| H200X044H1T-2-B | H200X044H2T-2-B | | | 2500 | | | | | | | | | | | |
| H100X064H1T-2 | H100X064H2T-2 | 0.38 | 9.7 | 1.00 | 25.4 | 0.64 | 16.3 | 0.13 | 3.3 | 0.38 | 9.7 | 12 – 6 AWG | 2 | 1000 | |
| H100X064H1T-2-B | H100X064H2T-2-B | | | 5000 | | | | | | | | | | | |
| H200X064H1T-2 | H200X064H2T-2 | | | 2.00 | 50.8 | | | | | | | | | 500 | |
| H200X064H1T-2-B | H200X064H2T-2-B | | | 2500 | | | | | | | | | | | |
| H100X084H1T-2 | H100X084H2T-2 | 0.50 | 12.7 | 1.00 | 25.4 | 0.84 | 21.3 | 0.17 | 4.3 | 0.50 | 12.7 | 8 – 1 AWG | 2 | 1000 | |
| H100X084H1T-2-B | H100X084H2T-2-B | | | 5000 | | | | | | | | | | | |
| H200X084H1T-2 | H200X084H2T-2 | | | 2.00 | 50.8 | | | | | | | | | 500 | |
| H200X084H1T-2-B | H200X084H2T-2-B | | | 2500 | | | | | | | | | | | |
| H100X122H1T-2 | H100X122H2T-2 | 0.75 | 19.0 | 1.00 | 25.4 | 1.22 | 31.0 | 0.25 | 6.3 | 0.75 | 19.0 | 8 – 4/0 AWG | 2 | 500 | |
| H200X122H1T-2 | H200X122H2T-2 | | | 1 | 250 | | | | | | | | | | |
| H100X165H1T-2 | H100X165H2T-2 | 1.00 | 25.4 | 1.00 | 25.4 | 1.65 | 41.9 | 0.33 | 8.4 | 1.00 | 25.4 | 4 AWG – 500 MCM | 2 | 500 | |
| H200X165H1T-2 | H200X165H2T-2 | | | 1 | 250 | | | | | | | | | | |

Order number of labels required in multiples of Standard Package Quantity.

Halogen-Free Two-Sided Heat Shrink Labels



- Permanent, one-piece, heat shrink sleeve designed to provide clear, durable identification of wires and cables
- Can be printed on both sides for improved visibility
- Meet SAE-AS5942, MIL-STD-883F Method 2015.13, Solutions A, B, and D, and MIL-STD-202G Method 215K, Solutions A, C, and D when printed with resin and hybrid thermal transfer ribbons
- Meet BS6853; 1999 Vehicle Category 1A for burning behavior and toxic gas emissions; Smoke Density Class II
- Shrink ratio 2:1
- Use thermal transfer hybrid ribbon
- Temperature range: -22°F to 221°F (-30°C to 105°C)



| Part Number | Part Number | Diameter | | Width | | Height | | Min. Cable O.D. | | Max. Cable O.D. | | Wire Range | Labels Per Row | Labels Per Roll | Std. Pkg. Qty. (Roll) |
|---------------|---------------|----------|------|-------|------|--------|------|-----------------|------|-----------------|------|-----------------|----------------|-----------------|-----------------------|
| | | In. | mm | In. | mm | In. | mm | In. | mm | In. | mm | | | | |
| H100X025HFT-2 | H100X025HGT-2 | 0.13 | 3.1 | 1.00 | 25.4 | 0.25 | 6.4 | 0.06 | 1.5 | 0.13 | 3.3 | 22 – 18 AWG | 2 | 1000 | 1 |
| H200X025HFT-2 | H200X025HGT-2 | | | 2.00 | 50.8 | | | | | | | | 1 | 500 | |
| H100X034HFT-2 | H100X034HGT-2 | 0.19 | 4.7 | 1.00 | 25.4 | 0.34 | 8.6 | 0.09 | 2.3 | 0.19 | 4.8 | 18 – 12 AWG | 2 | 1000 | |
| H200X034HFT-2 | H200X034HGT-2 | | | 2.00 | 50.8 | | | | | | | | 1 | 500 | |
| H100X044HFT-2 | H100X044HGT-2 | 0.25 | 6.4 | 1.00 | 25.4 | 0.44 | 11.1 | 0.13 | 3.3 | 0.25 | 6.4 | 16 – 10 AWG | 2 | 1000 | |
| H200X044HFT-2 | H200X044HGT-2 | | | 2.00 | 50.8 | | | | | | | | 1 | 500 | |
| H100X064HFT-2 | H100X064HGT-2 | 0.38 | 9.7 | 1.00 | 25.4 | 0.64 | 16.2 | 0.19 | 4.8 | 0.38 | 9.7 | 12 – 6 AWG | 2 | 1000 | |
| H200X064HFT-2 | H200X064HGT-2 | | | 2.00 | 50.8 | | | | | | | | 1 | 500 | |
| H100X084HFT-2 | H100X084HGT-2 | 0.50 | 12.7 | 1.00 | 25.4 | 0.84 | 21.3 | 0.25 | 6.4 | 0.50 | 12.7 | 8 – 1 AWG | 2 | 1000 | |
| H200X084HFT-2 | H200X084HGT-2 | | | 2.00 | 50.8 | | | | | | | | 1 | 500 | |
| H100X165HFT-2 | H100X165HGT-2 | 1.00 | 25.4 | 1.00 | 25.4 | 1.65 | 41.9 | 0.50 | 12.7 | 1.00 | 25.4 | 8 AWG – 500 MCM | 2 | 500 | |
| H200X165HFT-2 | H200X165HGT-2 | | | 2.00 | 50.8 | | | | | | | | 1 | 250 | |

Order number of labels required in multiples of Standard Package Quantity.

Fluid-Resistant Two-Sided Heat Shrink Labels

PATENTED

- Permanent, one-piece, heat shrink sleeve designed to provide clear, durable identification of wires and cables
- Cross-linked, semi-rigid, fluid-resistant, shrinkable polyolefin material
- Available in yellow only
- Can be printed on both sides for improved visibility
- Meet the material requirements and physical properties AMS-DTL-23053/6 Class 1 and NF F00-608 Class A and H when printed with resin thermal transfer ribbons

- Meet SAE-AS5942, MIL-STD-883F Method 2015.13 Solutions A and D, and MIL-STD-202G Method 215K, Solutions A and D when printed with resin thermal transfer ribbons
- Shrink ratio 3:1
- Use thermal transfer RMER4BL-C resin ribbon
- Temperature range: -67°F to 275°F (-55°C to 135°C)



| Part Number | Diameter | | Width | | Height | | Min. Cable O.D. | | Max. Cable O.D. | | Wire Range | Labels Per Row | Labels Per Roll | Std. Pkg. Qty. (Roll) |
|---------------|----------|------|-------|------|--------|------|-----------------|-----|-----------------|------|-----------------|----------------|-----------------|-----------------------|
| | In. | mm | In. | mm | In. | mm | In. | mm | In. | mm | | | | |
| H100X034HST-2 | 0.19 | 4.7 | 1.00 | 25.4 | 0.34 | 8.6 | 0.06 | 1.5 | 0.19 | 4.8 | 18 – 12 AWG | 2 | 1000 | 1 |
| H200X034HST-2 | | | 2.00 | 50.8 | | | | | | | | 1 | 500 | |
| H100X044HST-2 | 0.25 | 6.4 | 1.00 | 25.4 | 0.44 | 11.1 | 0.08 | 2.0 | 0.25 | 6.4 | 16 – 10 AWG | 2 | 1000 | |
| H200X044HST-2 | | | 2.00 | 50.8 | | | | | | | | 1 | 500 | |
| H100X064HST-2 | 0.38 | 9.7 | 1.00 | 25.4 | 0.64 | 16.2 | 0.13 | 3.3 | 0.38 | 9.7 | 12 – 6 AWG | 2 | 1000 | |
| H200X064HST-2 | | | 2.00 | 50.8 | | | | | | | | 1 | 500 | |
| H100X084HST-2 | 0.50 | 12.7 | 1.00 | 25.4 | 0.84 | 21.3 | 0.17 | 4.3 | 0.50 | 12.7 | 8 – 1 AWG | 2 | 1000 | |
| H200X084HST-2 | | | 2.00 | 50.8 | | | | | | | | 1 | 500 | |
| H100X165HST-2 | 1.00 | 25.4 | 1.00 | 25.4 | 1.65 | 41.9 | 0.33 | 8.4 | 1.00 | 25.4 | 4 AWG – 500 MCM | 2 | 500 | |
| H200X165HST-2 | | | 2.00 | 50.8 | | | | | | | | 1 | 250 | |

Order number of labels required in multiples of Standard Package Quantity.

Raised Panel Push Button Labels

- Deliver the look of engraved laminated plates with the convenience of printing on demand
- Strong holding power for rough, textured, and powder coated surfaces
- Provide crisp, clear, and durable legends for your reliable, high-performance identification needs
- Meet ASTM G154 for outdoor durability (simulating 20 years of UV resistance under normal conditions but not all outdoor exposure)
- Meet ASTM D3389 standard for abrasion resistance and also meet solar application standards
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



| Part Number | Color | Width | | Height | | Print-On Area Height | | Hole Diameter | | Labels Per Row | Std. Pkg. Qty. |
|----------------|--------|-------|------|--------|------|----------------------|------|---------------|------|----------------|----------------|
| | | In. | mm | In. | mm | In. | mm | In. | mm | | |
| C120X150APT-22 | White | 1.20 | 30.5 | 1.50 | 38.1 | 0.45 | 11.4 | 0.87 | 22.0 | 3 | 500 |
| C120X150A8T-22 | Yellow | | | | | | | | | | |
| C120X150AST-22 | Green | | | | | | | | | | |
| C120X150AWT-22 | Red | | | | | | | | | | |
| C120X150A0T-22 | Black | | | | | | | | | | |
| C120X190APT-22 | White | 1.90 | 48.3 | 0.85 | 21.6 | 1.18 | 30.0 | 1 | | | |
| C120X190A8T-22 | Yellow | | | | | | | | | | |
| C120X190AST-22 | Green | | | | | | | | | | |
| C120X190AWT-22 | Red | | | | | | | | | | |
| C120X190A0T-22 | Black | | | | | | | | | | |
| C180X180APT-30 | White | 1.80 | 45.7 | 1.80 | 45.7 | 0.36 | 9.1 | 1 | | | |
| C180X180A8T-30 | Yellow | | | | | | | | | | |
| C180X180AST-30 | Green | | | | | | | | | | |
| C180X180AWT-30 | Red | | | | | | | | | | |
| C180X180A0T-30 | Black | | | | | | | | | | |
| C240X240APT-30 | White | 2.40 | 61.0 | 2.40 | 61.0 | 0.90 | 22.9 | 1 | | | |
| C240X240A8T-30 | Yellow | | | | | | | | | | |
| C240X240AST-30 | Green | | | | | | | | | | |
| C240X240AWT-30 | Red | | | | | | | | | | |
| C240X240A0T-30 | Black | | | | | | | | | | |

Order number of labels required in multiples of Standard Package Quantity.
 Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Raised Panel Push Button Over-Laminate Labels

- Provide additional print protection in harsh environments
- Over-laminates are not printable
- Temperature range: -51°F to 275°F (-46°C to 135°C)

| Part Number | Color | Width | | Height | | Hole Diameter | | Labels Per Roll | Std. Pkg. Qty. | |
|---------------|-------|-------|------|--------|------|---------------|------|-----------------|----------------|---|
| | | In. | mm | In. | mm | In. | mm | | | |
| C120X150YK-22 | Clear | 1.20 | 30.5 | 1.50 | 38.1 | 0.87 | 22.0 | 3 | 500 | |
| C120X190YK-22 | | | | 1.90 | 48.3 | | | | | |
| C180X180YK-30 | | 1.80 | 45.7 | 1.80 | 45.7 | 1.18 | 30.0 | | | 2 |
| C240X240YK-30 | | 2.40 | 60.9 | 2.40 | 60.9 | 1.18 | 30.0 | | | 1 |

Order number of labels required in multiples of Standard Package Quantity.

Raised Panel Half Push Button Labels

- Deliver the look of engraved laminated plates with the convenience of printing on demand
- Strong holding power for rough, textured, and powder-coated surfaces
- Provide crisp, clear, and durable legends for your reliable, high-performance identification needs
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



| Part Number | Color | Width | | Height | | Print-On Area Height | | Hole Diameter | | Labels Per Row | Std. Pkg. Qty. |
|-----------------|-------|-------|------|--------|------|----------------------|------|---------------|------|----------------|----------------|
| | | In. | mm | In. | mm | In. | mm | In. | mm | | |
| C180X130APT-30H | White | 1.80 | 45.7 | 1.30 | 33.0 | 0.73 | 18.5 | 1.18 | 30.0 | 1 | 500 |
| C240X200APT-30H | | 2.40 | 61.0 | 2.00 | 50.8 | 1.43 | 36.3 | | | | |

Order number of labels required in multiples of Standard Package Quantity.
Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Raised Panel Component Labels

- Deliver the look of engraved laminated plates with the convenience of printing on demand
- Strong holding power for rough, textured, and powder-coated surfaces
- Provide crisp, clear, and durable legends for your reliable, high-performance identification needs
- Meet ASTM G154 for outdoor durability (simulating 20 years of UV resistance under normal conditions but not all outdoor exposure)
- Meet ASTM D3389 standard for abrasion resistance, and also meet solar application standards
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



| Part Number | Color | Width | | Height | | Labels Per Row | Std. Pkg. Qty. | |
|-------------|--------|-------|-------|--------|------|----------------|----------------|---|
| | | In. | mm | In. | mm | | | |
| C100X050APT | White | 1.00 | 25.4 | 0.50 | 12.7 | 3 | 500 | |
| C100X050A8T | Yellow | | | | | | | |
| C100X050AST | Green | | | | | | | |
| C100X050AUT | Orange | | | | | | | |
| C100X050AWT | Red | | | | | | | |
| C100X050A0T | Black | | | | | | | |
| C100X050AMT | Silver | | | | | | | |
| C125X030APT | White | 1.25 | 31.8 | 0.30 | 7.6 | 1 | | |
| C125X030A0T | Black | | | | | | | |
| C170X090APT | White | 1.70 | 43.2 | 0.90 | 22.9 | 1 | | |
| C170X090A8T | Yellow | | | | | | | |
| C170X090AST | Green | | | | | | | |
| C170X090AWT | Red | | | | | | | |
| C170X090AMT | Silver | | | | | | | |
| C200X100APT | White | 2.00 | 50.8 | 1.00 | 25.4 | 1 | | |
| C200X100A8T | Yellow | | | | | | | |
| C200X100AST | Green | | | | | | | |
| C200X100AUT | Orange | | | | | | | |
| C200X100AWT | Red | | | | | | | |
| C200X100A0T | Black | | | | | | | |
| C200X100AMT | Silver | | | | | | | |
| C252X030APT | White | 2.52 | 64.0 | 0.30 | 7.6 | 1 | | |
| C252X030A0T | Black | | | | | | | |
| C300X100APT | White | 3.00 | 76.2 | 1.00 | 25.4 | 1 | | |
| C300X100A8T | Yellow | | | | | | | |
| C300X100AUT | Orange | | | | | | | |
| C300X100AWT | Red | | | | | | | |
| C300X100A0T | Black | | | | | | | |
| C300X250APT | White | | 76.2 | 2.50 | 63.5 | | | 1 |
| C300X250A8T | Yellow | | | | | | | |
| C300X250AST | Green | | | | | | | |
| C300X250AUT | Orange | | | | | | | |
| C300X250AWT | Red | | | | | | | |
| C300X250A0T | Black | | | | | | | |
| C300X250AMT | Silver | | | | | | | |
| C350X300APT | White | 3.50 | 88.9 | 3.00 | 76.2 | 1 | | |
| C350X300A8T | Yellow | | | | | | | |
| C350X300AUT | Orange | | | | | | | |
| C350X300A0T | Black | | | | | | | |
| C379X030APT | White | 3.79 | 96.3 | 0.30 | 7.6 | 1 | | |
| C379X030AQT | Blue | | | | | | | |
| C379X030AWT | Red | | | | | | | |
| C379X030A0T | Black | | | | | | | |
| C400X100APT | White | 4.00 | 101.6 | 1.00 | 25.4 | 1 | | |
| C400X100A8T | Yellow | | | | | | | |
| C400X100AST | Green | | | | | | | |
| C400X100AUT | Orange | | | | | | | |
| C400X100AWT | Red | | | | | | | |
| C400X100A0T | Black | | | | | | | |
| C400X100AMT | Silver | | | | | | | |

Order number of labels required in multiples of Standard Package Quantity.
Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Raised Panel Component Over-Laminate Labels


- Provide additional print protection in harsh environments
- Over-laminates are not printable
- Temperature range: -51°F to 275°F (-46°C to 135°C)

| Part Number | Color | Width | | Height | | Labels Per Roll | Std. Pkg. Qty. |
|-------------|-------|-------|-------|--------|------|-----------------|----------------|
| | | In. | mm | In. | mm | | |
| C100X050YK | Clear | 1.00 | 25.4 | 0.50 | 12.7 | 1 | 500 |
| C170X090YK | | 1.70 | 43.2 | 0.90 | 22.9 | | |
| C200X100YK | | 2.00 | 50.8 | 1.00 | 25.4 | | |
| C300X100YK | | 3.00 | 76.2 | 1.00 | 25.4 | | |
| C300X250YK | | 2.50 | 63.5 | | | | |
| C350X300YK | | 3.50 | 88.9 | 3.00 | 76.2 | | |
| C400X100YK | | 4.00 | 101.6 | 1.00 | 25.4 | | |

Order number of labels required in multiples of Standard Package Quantity.

Raised Panel Pre-Printed Emergency Stop Labels

- Deliver the look of engraved laminated plates with the convenience of printing on demand
- Strong holding power for rough, textured, and powder-coated surfaces
- Temperature range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14576; cUL recognized C22.2 No. 0.15.01, File # MH14576

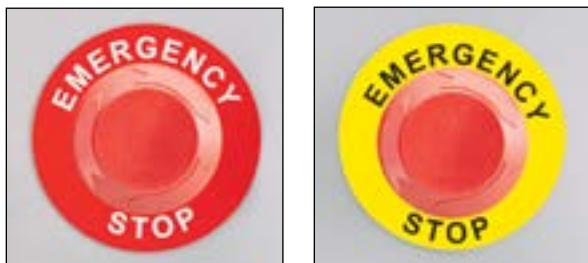

| Part Number | Color | Diameter | | Hole Diameter | | Std. Pkg. Qty. |
|--------------|-----------------|----------|------|---------------|------|----------------|
| | | In. | mm | In. | mm | |
| C235A8-30-ES | Black on Yellow | 2.35 | 60.0 | 1.18 | 30.0 | 25 |
| C235AW-30-ES | White on Red | | | | | |
| C350A8-30-ES | Black on Yellow | 3.50 | 89.0 | | | |
| C350AW-30-ES | White on Red | | | | | |

Order number of labels required in multiples of Standard Package Quantity.

Polyester Component Labels

- Provide durability; high-temperature resistance and dimensional stability; does not easily stretch or tear
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized, File # MH14576 and File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



| Part Number | Color | Width | | Height | | Labels Per Row | Std. Pkg. Qty. | |
|-------------|--------|--------|-------|--------|-------|----------------|----------------|-------|
| | | In. | mm | In. | mm | | | |
| C025X025YJT | White | 0.25 | 6.4 | 0.25 | 6.4 | 12 | 10000 | |
| C038X038YJT | | 0.38 | 9.7 | 0.38 | 9.7 | 7 | | |
| C050X044YJT | | 0.50 | 12.7 | 0.44 | 11.2 | 5 | | |
| C060X020YJT | | 0.60 | 15.2 | 0.20 | 5.1 | 3 | | |
| C075X025YJT | Silver | 0.75 | 19.1 | 0.25 | 6.4 | | | |
| C075X025YMT | | 0.80 | 20.3 | 0.20 | 5.1 | | | |
| C080X020YJT | White | 0.90 | 22.9 | 0.25 | 6.4 | 3 | | |
| C090X025YJT | | 0.25 | 6.4 | | | | | |
| C100X025YJT | | 0.38 | 9.7 | | | | | |
| C100X038YJT | | 0.25 | 6.4 | | | | | |
| C100X050YJT | 1.00 | 25.4 | 0.50 | 12.7 | 1.00 | 25.4 | | |
| C100X050YKT | | | Clear | | | | | |
| C100X050YMT | Silver | 1.25 | 31.8 | 0.38 | 9.7 | 1.50 | 38.1 | |
| C125X038YJT | White | | | 0.50 | 12.7 | | | |
| C150X050YJT | | 0.75 | 19.1 | | | | | |
| C150X075YJT | | Silver | 1.60 | 40.6 | 0.20 | 5.1 | 10000 | |
| C150X075YMT | White | 2.00 | 50.8 | 0.25 | 6.4 | 2.00 | 50.8 | |
| C160X020YJT | | | | 0.38 | 9.7 | | | |
| C200X025YJT | | | | 0.50 | 12.7 | | | |
| C200X038YJT | | | | 1.00 | 25.4 | 1.00 | 25.4 | 2500 |
| C200X050YJT | Clear | | | | | | | |
| C200X100YJT | Silver | 2.75 | 69.9 | 1.25 | 31.8 | 2.75 | 69.9 | |
| C200X100YKT | White | | | | | | | |
| C200X100YMT | Silver | 3.00 | 76.2 | 0.25 | 6.4 | 3.00 | 76.2 | |
| C275X125YJT | White | | | 0.38 | 9.7 | | | |
| C275X125YMT | | | | 1.00 | 25.4 | | | |
| C300X025YJT | | | | Silver | 2.00 | | | 50.8 |
| C300X038YJT | White | 3.50 | 88.9 | 1.00 | 25.4 | 3.50 | 88.9 | |
| C300X100YJT | | | | 1.00 | 25.4 | | | |
| C300X100YMT | Silver | 4.00 | 101.6 | 2.00 | 50.8 | 4.00 | 101.6 | |
| C300X200YJT | White | | | 3.00 | 76.2 | | | |
| C300X200YMT | | | | Silver | 4.00 | | | 101.6 |
| C350X100YJT | | | | White | 6.00 | | | 152.4 |
| C400X100YJT | White | 4.00 | 101.6 | 3.00 | 76.2 | 4.00 | 101.6 | |
| C400X200YJT | | | | 2.00 | 50.8 | | | |
| C400X200YMT | Silver | 4.00 | 101.6 | 4.00 | 101.6 | 4.00 | 101.6 | |
| C400X300YJT | White | | | 6.00 | 152.4 | | | |
| C400X400YJT | | | | White | | | | |
| C400X600YJT | White | 6.00 | 152.4 | 1000 | | | | |

Order number of labels required in multiples of Standard Package Quantity.
Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Super-Tack Polyester Component Labels

- Provide durability; high-temperature resistance and dimensional stability; does not stretch or easily tear; and has high-tack permanent adhesive
- Used to identify patch panels, faceplates, punchdown blocks, and other network systems hardware
- Meets DIN 40050-9, IP69K for washdown applications



- Use thermal transfer resin ribbon
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979

| Part Number | Color | Width | | Height | | Type of Application | Labels Per Row | Std. Pkg. Qty. | | | | | | | |
|----------------|--------|-------|-------|--------|------|-------------------------|--------------------|----------------|------------|------|------|------|--------|---|------|
| | | In. | mm | In. | mm | | | | | | | | | | |
| C061X030YPT | White | 0.61 | 15.5 | 0.30 | 7.6 | 1-port | 4 | 2500 | | | | | | | |
| C100X050YPT | | 1.00 | 25.4 | 0.50 | 12.7 | general identifier | 3 | | | | | | | | |
| C125X030YPT | | 1.25 | 31.8 | 0.30 | 7.6 | 2-port | | | | | | | | | |
| C138X019YPT | Black | 1.38 | 35.1 | 0.19 | 4.8 | module | | | | | | | | | |
| C138X019Y0T | | | | | | | | | | | | | | | |
| C188X030YPT | White | 1.88 | 47.8 | 0.30 | 7.6 | 3-port | | | | | | | | | |
| C200X100YPT | | Black | 2.00 | 50.8 | 1.00 | 25.4 | general identifier | | | | | | | | |
| C200X100Y0T | | | | | | | | | | | | | | | |
| C252X030YPT | White | 2.52 | 64.0 | 0.30 | 7.6 | 4-port | | | | | | | | | |
| C252X030YPT-P* | | | | | | | | | | | | | | | |
| C252X030YQT-P* | | | | | | TIA Blue | | | | | | | | | |
| C252X030YRT-P* | | | | | | TIA Brown | | | | | | | | | |
| C252X030YST-P* | | | | | | TIA Green | | | | | | | | | |
| C252X030YTT-P* | | | | | | TIA Gray | | | | | | | | | |
| C252X030YUT-P* | | | | | | TIA Orange | | | | | | | | | |
| C252X030YVT-P* | | | | | | TIA Purple | | | | | | | | | |
| C252X030YWT-P* | | | | | | TIA Red | | | | | | | | | |
| C252X030Y0T-P* | | | | | | Black | | | | | | | | | |
| C252X030Y8T-P* | | | | | | TIA Yellow | | | | | | | | | |
| C252X030Y9T-P* | | | | | | Gold | | | | | | | | | |
| C261X030YPT | | | | | | White | | | 2.61 | 66.3 | 0.30 | 7.6 | 4-port | 1 | 2500 |
| C275X125YPT | | | | | | | | | Black | 2.75 | 69.9 | 1.25 | 31.8 | | |
| C275X125Y0T | | | | | | | | | | | | | | | |
| C288X030YPT | White | 3.00 | 76.2 | 2.00 | 50.8 | 5-port | | | | | | | | | |
| C300X200YPT | | | | | | general identifier | | | | | | | | | |
| C315X030YPT | | | | | | 5-port | | | | | | | | | |
| C379X030YPT | | | | | | 6-port | | | | | | | | | |
| C379X030YPT-P* | | | | | | 1, 2, 3, 4, 5 or 6-port | | | | | | | | | |
| C379X030YQT-P* | | | | | | | | | TIA Blue | | | | | | |
| C379X030YRT-P* | | | | | | | | | TIA Brown | | | | | | |
| C379X030YST-P* | | | | | | | | | TIA Green | | | | | | |
| C379X030YTT-P* | | | | | | | | | TIA Gray | | | | | | |
| C379X030YUT-P* | | | | | | | | | TIA Orange | | | | | | |
| C379X030YVT-P* | | | | | | | | | TIA Purple | | | | | | |
| C379X030YWT-P* | | | | | | | | | TIA Red | | | | | | |
| C379X030Y0T-P* | | | | | | | | | Black | | | | | | |
| C379X030Y8T-P* | | | | | | | | | TIA Yellow | | | | | | |
| C379X030Y9T-P* | | | | | | Gold | | | | | | | | | |
| C400X200Y8T | Yellow | 4.00 | 101.6 | 2.00 | 50.8 | general identifier | | 1000 | | | | | | | |
| C400X300YPT | White | | | 3.00 | 76.2 | | | 2500 | | | | | | | |

*Label is perforated to be used in 1, 2, 3, 4, or 6-Port position applications.
 Order number of labels required in multiples of Standard Package Quantity.
 Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Tedlar® Component Labels

- Self-extinguishing and ideal for labeling high-temperature areas
- Meet Federal Motor Vehicle Safety Standard (FMVSS-302) for flammability
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 225°F (-40°C to 106°C); tests at 275°F have shown acceptable results



| Part Number | Color | Width | | Height | | Labels Per Row | Std. Pkg. Qty. |
|-------------|-------|-------|------|--------|------|----------------|----------------|
| | | In. | mm | In. | mm | | |
| C060X020TJT | White | 0.60 | 15.2 | 0.20 | 5.1 | 3 | 10000 |
| C090X025TJT | | 0.90 | 22.9 | 0.25 | 6.4 | | |
| C100X038TJT | | 1.00 | 25.4 | 0.38 | 9.7 | | |
| C100X050TJT | | | | 0.50 | 12.7 | | |
| C125X038TJT | | 1.25 | 31.8 | 0.38 | 9.7 | 2500 | |
| C200X038TJT | | 2.00 | 50.8 | | | 1.00 | 25.4 |
| C200X100TJT | | | | 1.00 | 25.4 | 1 | 2500 |
| C300X038TJT | | 3.00 | 76.2 | 0.38 | 9.7 | 5000 | |

Tedlar® is a registered trademark of E.I. du Pont de Nemours and Company.
 Order number of labels required in multiples of Standard Package Quantity.
 Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Tamper-Evident Polyester Component Labels

- Leaves a checkerboard of silver material allowing you to see if label has been tampered with
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized, File # MH14576 and File # MH14979



| Part Number | Color | Width | | Height | | Labels Per Row | Std. Pkg. Qty. |
|-------------|--------|-------|------|--------|------|----------------|----------------|
| | | In. | mm | In. | mm | | |
| C075X025AAT | Silver | 0.75 | 19.1 | 0.25 | 6.4 | 3 | 10000 |
| C100X050AAT | | 1.00 | 25.4 | 0.50 | 12.7 | | |
| C200X100AAT | | 2.00 | 50.8 | 1.00 | 25.4 | 1 | 2500 |
| C275X125AAT | | 2.75 | 69.9 | 1.25 | 31.8 | | |

Order number of labels required in multiples of Standard Package Quantity.
 Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Non-Adhesive Polyester Component Labels

- Used to identify patch panels, faceplates, punchdown blocks, and other network systems hardware

- Use thermal transfer resin ribbon
- Temperature range: -10°F to 302°F (-23°C to 150°C)



| Part Number | Color | Width | | Height | | Application | Labels Per Row | Std. Pkg. Qty. |
|-------------|-------|-------|-------|--------|------|-----------------------|----------------|----------------|
| | | In. | mm | In. | mm | | | |
| C150X030Y1T | White | 1.50 | 38.1 | 0.30 | 7.6 | 3-port identifier | 2 | 1000 |
| C195X040Y1T | | 1.95 | 49.5 | 0.40 | 10.2 | Single-gang faceplate | | |
| C261X035Y1T | | 2.61 | 66.3 | 0.35 | 8.9 | 4-port identifier | | |
| C288X040Y1T | | 2.88 | 73.2 | 0.40 | 10.2 | Double-gang faceplate | | |
| C390X030Y1T | | 3.90 | 99.1 | 0.30 | 7.6 | 6-port identifier | | |
| C750X050Y1T | | 7.50 | 190.5 | 0.50 | 12.7 | 110 block | | |
| C788X050Y1T | | 7.88 | 200.2 | 0.50 | 12.7 | GP6™ Punchdown System | | |

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Vinyl Cloth Component Labels

- Ideal for temporary marking of chips, boards, and ICs
- Removable without leaving any residue
- Pliable material is suitable for rough texture surfaces
- Use thermal transfer hybrid ribbon

- Temperature range: 50°F to 170°F (10°C to 77°C)
- UL969 recognized, File # MH14576 and File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14576



| Part Number | Color | Width | | Height | | Labels Per Row | Std. Pkg. Qty. | |
|-------------|-------|-------|-------|--------|------|----------------|----------------|-------|
| | | In. | mm | In. | mm | | | |
| C050X044CBT | White | 0.50 | 12.7 | 0.44 | 11.2 | 5 | 10000 | |
| C060X020CBT | | 0.60 | 15.2 | 0.20 | 5.1 | 3 | | |
| C075X025CBT | | 0.75 | 19.1 | 0.25 | 6.4 | | | |
| C100X025CBT | | 1.00 | 25.4 | | | | | 0.38 |
| C100X038CBT | | | | 0.50 | 12.7 | | | |
| C100X050CBT | | 1.50 | 38.1 | 0.75 | 19.1 | 1 | | 5000 |
| C150X075CBT | | 1.60 | 40.6 | 0.20 | 5.1 | | | 10000 |
| C160X020CBT | | 2.00 | 50.8 | 0.50 | 12.7 | | | 5000 |
| C200X050CBT | | 4.00 | 101.6 | 1.00 | 25.4 | | | 2500 |

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Polyimide Component Labels

- Ideal for electronic components and internal circuitry applications
- Intended for applications requiring solvent and high-temperature resistance performance, such as the wave solder process

- Use thermal transfer RMER4BL-C or RHER4BL-C resin ribbon on white polyimide
- Use thermal transfer hybrid ribbon on tan polyimide
- Temperature range: -40°F to 350°F (-40°C to 177°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



| Part Number | Color | Width | | Height | | Labels Per Row | Std. Pkg. Qty. |
|-------------|-------|-------|------|--------|-----|----------------|----------------|
| | | In. | mm | In. | mm | | |
| C025X025KBT | White | 0.25 | 6.4 | 0.25 | 6.4 | 12 | 10000 |
| C025X025KCT | Tan | | | | | | |
| C038X038KBT | White | 0.38 | 9.7 | 0.38 | 9.7 | 7 | |
| C038X038KCT | Tan | | | | | | |
| C050X013KBT | White | 0.50 | 12.7 | 0.13 | 3.3 | 5 | |
| C050X013KCT | Tan | | | | | | |
| C050X020KBT | White | | | 0.20 | 5.1 | | |
| C050X044KBT | | | | | | | |
| C050X044KCT | | | | Tan | | | |
| C060X020KBT | White | 0.60 | 15.3 | 0.20 | 5.1 | 3 | |
| C060X020KCT | Tan | | | | | | |
| C065X019KBT | White | 0.65 | 16.5 | 0.19 | 4.8 | | |
| C065X019KCT | Tan | | | | | | |
| C075X025KBT | White | 0.75 | 19.1 | 0.25 | 6.4 | | |
| C075X025KCT | Tan | | | | | | |
| C080X020KBT | White | 0.80 | 20.3 | 0.20 | 5.1 | | |
| C080X020KCT | Tan | | | | | | |
| C090X025KBT | White | 0.90 | 22.9 | 0.25 | 6.4 | | |
| C090X025KCT | Tan | | | | | | |
| C100X019KBT | White | 1.00 | 25.4 | 0.19 | 4.8 | | |
| C100X019KCT | Tan | | | | | | |
| C100X025KBT | White | | | 0.25 | 6.4 | | |
| C100X025KCT | Tan | | | | | | |
| C100X038KBT | White | | | 0.38 | 9.7 | | |
| C100X038KCT | Tan | | | | | | |
| C125X025KBT | White | 1.25 | 31.8 | 0.25 | 6.4 | 2 | |
| C125X025KCT | Tan | | | | | | |
| C150X025KBT | White | 1.50 | 38.1 | 0.25 | 6.4 | | |
| C150X025KCT | Tan | | | | | | |
| C160X020KBT | White | 1.60 | 40.6 | 0.20 | 5.1 | 10000 | |
| C160X020KCT | Tan | | | | | | |
| C200X025KBT | White | 2.00 | 50.8 | 0.25 | 6.4 | 1 | |
| C200X025KCT | Tan | | | | | | |
| C200X038KBT | White | | | 0.38 | 9.7 | | |
| C300X025KBT | | 3.00 | 76.2 | | | 0.25 | 6.4 |
| C300X025KCT | Tan | | | | | | |

Order number of labels required in multiples of Standard Package Quantity.
Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Paper Component Labels

- General purpose material
- Use thermal transfer hybrid ribbon

- Temperature range: -65°F to 160°F (-54°C to 71°C)
- UL969 recognized, File # MH14576 and File # MH14979



| Part Number | Color | Width | | Height | | Labels Per Row | Std. Pkg. Qty. |
|-------------|-------|-------|-------|--------|-------|----------------|----------------|
| | | In. | mm | In. | mm | | |
| C075X025PBT | White | 0.75 | 19.1 | 0.25 | 6.4 | 3 | 10000 |
| C100X050PBT | | 1.00 | 25.4 | 0.50 | 12.7 | | |
| C150X075PBT | | 1.50 | 38.1 | 0.75 | 19.1 | 1 | 5000 |
| C200X100PBT | | 2.00 | 50.8 | 1.00 | 25.4 | | 2500 |
| C300X200PBT | | 3.00 | 76.2 | 2.00 | 50.8 | | 1000 |
| C400X100PBT | | 4.00 | 101.6 | 1.00 | 25.4 | | 2500 |
| C400X200PBT | | | | 2.00 | 50.8 | | 1000 |
| C400X300PBT | | | | 3.00 | 76.2 | | 2500 |
| C400X500PBT | | | | 5.00 | 127.0 | 1000 | |
| C400X600PBT | | 6.00 | 152.4 | | | | |

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Reflective Continuous Tapes

- Used for illuminating or highlighting a range of objects
- Offer crisp, clear legends with superior legibility
- Conformable material for flat applications and safety and facility identification
- Can be over-laminated to increase durability (see page 28)

- Use thermal transfer resin ribbon
- Temperature range: -40°F to 180°F (-40°C to 82°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



| Part Number | Color | Width | | Length | | Std. Pkg. Qty. (Roll) |
|-------------|--------|-------|-------|--------|------|-----------------------|
| | | In. | mm | Ft. | m | |
| T100X000RP1 | White | 1.00 | 25.4 | 50.0 | 15.2 | 1 |
| T100X000RU1 | Orange | | | | | |
| T100X000RW1 | Red | | | | | |
| T100X000RX1 | Yellow | | | | | |
| T200X000RP1 | White | 2.00 | 50.8 | | | |
| T200X000RU1 | Orange | | | | | |
| T200X000RW1 | Red | | | | | |
| T200X000RX1 | Yellow | | | | | |
| T300X000RP1 | White | 3.00 | 76.2 | | | |
| T400X000RP1 | White | | | | | |
| T400X000RQ1 | Blue | 4.00 | 101.6 | | | |
| T400X000RU1 | Orange | | | | | |
| T400X000RW1 | Red | | | | | |
| T400X000RX1 | Yellow | | | | | |

Order number of labels required in multiples of Standard Package Quantity.

Continuous Tapes

- Offer crisp, clear legends with superior legibility
- Conformable material for flat applications and safety and facility identification
- Can be over-laminated to increase durability (see page 28)
- Use thermal transfer resin ribbon
- For white, black, clear, blue, and yellow vinyl continuous tapes only: UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



| Part Number | Color | Material | Temperature Range | Width | | Length | | Std. Pkg. Qty. (Roll) |
|--------------|--------|------------|---------------------------------|-------|-------|--------|------|-----------------------|
| | | | | In. | mm | Ft. | m | |
| T024X000FJT* | White | Polyolefin | -40°F to 180°F (-40°C to 82°C) | 0.24 | 6.1 | | | |
| T031X000FJT* | | | | 0.31 | 7.9 | | | |
| T038X000FJT* | | | | 0.38 | 9.7 | | | |
| T050X000FJT* | | | | 0.50 | 12.7 | | | |
| T100X000VP1Y | | | | | | | | |
| T100X000VQ1Y | Blue | Vinyl | -58°F to 176°F (-50°C to 80°C) | 1.00 | 25.4 | | | |
| T100X000VS1Y | Green | | | | | | | |
| T100X000VU1Y | Orange | | | | | | | |
| T100X000VW1Y | Red | | | | | | | |
| T100X000VX1Y | Yellow | | | | | | | |
| T100X000VY1Y | Black | | | | | | | |
| T100X000YK1 | Clear | | | | | | | |
| T200X000VP1Y | White | Vinyl | -58°F to 176°F (-50°C to 80°C) | 2.00 | 50.8 | 100.0 | 30.5 | 1 |
| T200X000VQ1Y | Blue | | | | | | | |
| T200X000VR1Y | Brown | | | | | | | |
| T200X000VS1Y | Green | | | | | | | |
| T200X000VT1Y | Gray | | | | | | | |
| T200X000VU1Y | Orange | | | | | | | |
| T200X000VV1Y | Purple | | | | | | | |
| T200X000VW1Y | Red | | | | | | | |
| T200X000VX1Y | Yellow | | | | | | | |
| T200X000VY1Y | Black | | | | | | | |
| T200X000YK1 | Clear | | | | | | | |
| T400X000VP1Y | White | Vinyl | -58°F to 176°F (-50°C to 80°C) | 4.00 | 101.6 | | | |
| T400X000VQ1Y | Blue | | | | | | | |
| T400X000VR1Y | Brown | | | | | | | |
| T400X000VS1Y | Green | | | | | | | |
| T400X000VT1Y | Gray | | | | | | | |
| T400X000VU1Y | Orange | | | | | | | |
| T400X000VV1Y | Purple | | | | | | | |
| T400X000VW1Y | Red | | | | | | | |
| T400X000VX1Y | Yellow | | | | | | | |
| T400X000VY1Y | Black | | | | | | | |
| T400X000YK1 | Clear | | | | | | | |
| T400X000YK1 | Clear | Polyester | -40°F to 302°F (-40°C to 150°C) | | | | | |

Order number of rolls required in multiples of Standard Package Quantity.

*Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Super-Tack Polyester Continuous Tapes

- Thermal transfer printable continuous tape format
- Super-tack polyester has ultra-aggressive adhesive
- Ideal for rough, textured, and coated surfaces
- Applications include rack unit labeling, cabinets, cable tray, pathways, control panels, enclosures, pipes, and much more
- Meets DIN 40050-9, IP69K for washdown applications.
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized, File # MH14979, cUL recognized, C22.2 No. 0.15.01, File # MH14979



| Part Number | Color | Material | Width | | Length | | Std. Pkg. Qty. (Roll) |
|-------------|--------|-----------|-------|-----|--------|------|-----------------------|
| | | | In. | mm | Ft. | m | |
| T038X000Y01 | Black | Polyester | 0.38 | 9.7 | 100.0 | 30.5 | 1 |
| T038X000YP1 | White | | | | | | |
| T050X000Y01 | Black | | | | | | |
| T050X000YP1 | White | | | | | | |
| T100X000Y01 | Black | | | | | | |
| T100X000Y81 | Yellow | | | | | | |
| T100X000YP1 | White | | | | | | |
| T100X000YQ1 | Blue | | | | | | |
| T100X000YS1 | Green | | | | | | |
| T100X000YU1 | Orange | | | | | | |
| T100X000YW1 | Red | | | | | | |
| T200X000Y01 | Black | | | | | | |
| T200X000Y81 | Yellow | | | | | | |
| T200X000YP1 | White | | | | | | |
| T200X000YQ1 | Blue | | | | | | |
| T200X000YS1 | Green | | | | | | |
| T200X000YU1 | Orange | | | | | | |
| T200X000YW1 | Red | | | | | | |
| T400X000Y01 | Black | | | | | | |
| T400X000Y81 | Yellow | | | | | | |
| T400X000YP1 | White | | | | | | |
| T400X000YQ1 | Blue | | | | | | |
| T400X000YS1 | Green | | | | | | |
| T400X000YU1 | Orange | | | | | | |
| T400X000YW1 | Red | | | | | | |

Order number of labels required in multiples of Standard Package Quantity.

Non-Printable Clear Over-Laminate Continuous Tapes

- Over-laminates can be used for additional protection over the 2" and 4" continuous tapes
- When over-laminates are used with Super-Tack Polyester Labels, the labels meet DIN 40050-9, IP69K for washdown applications
- Temperature range: -40°F to 302°F (-40°C to 150°C)

| Part Number | Color | Material | Width | | Length | | Std. Pkg. Qty. (Roll) |
|-------------|-------|-----------|-------|-------|--------|------|-----------------------|
| | | | In. | mm | Ft. | m | |
| T225X000YK1 | Clear | Polyester | 2.25 | 57.2 | 100.0 | 30.5 | 1 |
| T425X000YK1 | | | 4.25 | 107.9 | | | |

Order number of labels required in multiples of Standard Package Quantity.

Super-Tack Polyester Arc Flash Labels

- Provide employees with the highest degree of safety through proper identification and communication
- Detailed formats compliant with NFPA 70E standard for Arc Flash labeling
- Clearly visible and recognizable hazard information to communicate arc flash hazards present
- Meets DIN 40050-9, IP69K for washdown applications
- Labels are constructed of durable polyester designed to withstand UV exposure, outdoor use, water and abrasion
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized; File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



C200X400A51



C200X400YZ1




C400X400A51



C400X400YZ1



C400X600A51



C400X600YX1



C400X600YZ1

| Part Number | Width | | Height | | Part Description | Std. Pkg. Qty. (Roll) |
|-------------|-------|-------|--------|-------|---|-----------------------|
| | In. | mm | In. | mm | | |
| C200X400A51 | 2.00 | 50.8 | 4.00 | 101.6 | Polyester safety label, WARNING header orange and black, 250 labels per roll. | 1 |
| C200X400YZ1 | | | | | Polyester safety label, DANGER header red and white, 250 labels per roll. | |
| C400X400A51 | 4.00 | 101.6 | 6.00 | 152.4 | Polyester safety label, WARNING header orange and black, 250 labels per roll. | |
| C400X400YZ1 | | | | | Polyester safety label, DANGER header red and white, 250 labels per roll. | |
| C400X600A51 | | | | | Polyester safety label, WARNING header orange and black, 100 labels per roll. | |
| C400X600YX1 | | | | | Polyester safety label, orange header, 100 labels per roll. | |
| C400X600YZ1 | | | | | Polyester safety label, DANGER header red and white, 100 labels per roll. | |

Order number of labels required in multiples of Standard Package Quantity

Raised Panel Arc Flash Labels

- Super-Tack adhesive provides strong holding power for rough, textured, and powder-coated surfaces
- Meet ASTM G154 for outdoor durability (simulating 20 years of UV resistance under normal conditions but not all outdoor exposures)
- Meet ASTM D3389 standard for abrasion resistance, and also meets solar application standards
- Use thermal transfer resin ribbon
- Temperature Range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14979, cUL recognized, C22.2 No. 0.15.01, File # MH 14979



C400X400AOT



C400X400ANT

| Part Number | Color | Width | | Height | | Part Description | Std. Pkg. Qty. (Roll) |
|-------------|--------|-------|-------|--------|-------|---|-----------------------|
| | | In. | mm | In. | mm | | |
| C400X400ANT | Orange | 4.00 | 101.6 | 4.00 | 101.6 | Raised Panel Safety Label, WARNING header, White and Orange/Black | 1 |
| | White | | | | | | |
| C400X400AOT | Red | | | | | Raised Panel Safety Label, DANGER header, White and Red/Black | |
| | White | | | | | | |

Order number of labels required in multiples of Standard Package Quantity

Super-Tack Polyester Arc Flash Continuous Tapes



T400X000YX1



T400X000A91

| Part Number | Width | | Height | | Part Description | Std. Pkg. Qty. (Roll) |
|-------------|-------|-------|--------|------|---|-----------------------|
| | In. | mm | Ft | M | | |
| T400X000YX1 | 4.00 | 101.6 | 50.0 | 15.2 | Polyester arc flash continuous tape, orange header. | 1 |
| T400X000A91 | | | | | Polyester arc flash continuous tape, red header. | |

Order number of labels required in multiples of Standard Package Quantity

Super-Tack Polyester Facility Identification Labels

- Facility Identification created quickly to comply with workplace safety regulations contributing to the protection of employees and equipment from unexpected hazards
- Meets DIN 40050-9, IP69K for washdown applications
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized; File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



C400X600A41



C400X600A61



C400X600AX1



C400X600AY1



C400X600AZ1



C400X600Y81

| Part Number | Width | | Height | | Part Description | Labels Per Row | Std. Pkg. Qty. (Roll) |
|-------------|-------|-------|--------|-------|--|----------------|-----------------------|
| | In. | mm | In. | mm | | | |
| C400X600A41 | 4.00 | 101.6 | 6.00 | 152.4 | Polyester safety label, DANGER header, red and black/white, 100 labels per roll. | 1 | 1 |
| C400X600A61 | | | | | Polyester safety label, CAUTION header, yellow/black, 100 labels per roll. | | |
| C400X600AX1 | | | | | Polyester safety label, blue/white, NOTICE header, 100 labels per roll. | | |
| C400X600AY1 | | | | | Polyester safety label, green/ white, SAFETY FIRST header, 100 labels per roll. | | |
| C400X600AZ1 | | | | | Polyester safety label, yellow header, 100 labels per roll. | | |
| C400X600Y81 | | | | | Polyester safety label, yellow, 100 labels per roll. | | |

Order number of labels required in multiples of Standard Package Quantity

Polyester Photoluminescent Tapes

- Used to mark egress routes, fire alarms, and fire equipment
- Clearly visible for up to ten hours after power is lost
- Absorbs energy from ambient light and releases this energy in the form of a glow when power is lost

- Can be over-laminated to increase durability (see page 28)
- Use thermal transfer resin ribbon
- Temperature range: 40°F to 230°F (4.4°C to 110°C)
- UL969 recognized, File # MH14979



Normal Lighting



Blackout

| Part Number | Color | Width | | Length | | Std. Pkg. Qty. (Roll) |
|-------------|------------------|-------|-------|--------|-----|-----------------------|
| | | In. | mm | Ft | M | |
| T200X000Y2T | Photoluminescent | 2.00 | 50.8 | 15.0 | 4.5 | 1 |
| T400X000Y2T | | 4.00 | 101.6 | | | |

Order number of labels required in multiples of Standard Package Quantity

Raised Panel Solar Labels

- Print customized labels for solar applications
- Strong holding power for rough, textured, and coated surfaces
- Meet ASTM G154 for outdoor durability (simulating 20 years of UV resistance under normal conditions but not all outdoor exposures)

- Use thermal transfer resin ribbon
- Temperature Range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14979, cUL recognized, C22.2 No. 0.15.01, File # MH 14979




| Part Number | Color | Width | | Height | | Labels Per Row | Std. Pkg. Qty. |
|-------------|-------|-------|-------|--------|------|----------------|----------------|
| | | In. | mm | In. | mm | | |
| C200X100AWT | Red | 2.00 | 50.8 | 1.00 | 25.4 | 1 | 500 |
| C300X250AWT | | 3.00 | 76.2 | 2.50 | 63.5 | | |
| C400X100AWT | | 4.00 | 101.6 | 1.00 | 25.4 | | |

Order number of labels required in multiples of Standard Package Quantity

Super-Tack Polyester Solar Labels

- Solar Labels are designed to meet required safety standards for PV installation labeling.
- Certain labels leave blank spaces where variable thermal transfer printing can be added when specific on-site power and series data is required.



- Meets DIN 40050-9, IP69K for washdown applications
- This product solution has an optional clear over-laminate to function in harsh environments.
- All labels are outdoor rated and are designed to have high resistance to direct UV exposure.
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 180°F (-40°C to 82°C)
- UL969 recognized; File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979

| Part Number | Color | Width | | Height | | Application | Legend | Std. Pkg. Qty. (Roll) | |
|-----------------|---------------|-------|------------------------------|--------|-------|---------------------------|-----------------------------|-----------------------|-----------------------------------|
| | | In. | mm | In. | mm | | | | |
| C400X200SP1-AD | White on Red | 4.00 | 101.6 | 2.00 | 50.8 | AC Disconnect | VOLTAGE AND CURRENT RATINGS | 50 | |
| C400X400SP1-ASM | | | | 4.00 | 101.6 | AC Photovoltaic Module | | | VOLTAGE CURRENT AND POWER RATINGS |
| C400X400SP1-DD | | | | | | DC Disconnect | | | VOLTAGE AND CURRENT RATINGS |
| C400X400SP1-DSM | | | | | | DC Photovoltaic Module | | | VOLTAGE CURRENT AND POWER RATINGS |
| C400X400SP1-PS | | | | | | Photovoltaic Power Source | | | VOLTAGE AND CURRENT RANTINGS |
| C600X175SP1-AD | | | | 6.00 | 152.4 | 1.75 | 44.5 | | AC Disconnect |
| C600X175SP1-DD | DC Disconnect | | PHOTOVOLTAIC - DC DISCONNECT | | | | | | |

Order number of labels required in multiples of Standard Package Quantity

Over-Laminate Labels

| Part Number | Color | Width | | Height | | Application | Std. Pkg. Qty. |
|----------------|-------|-------|-------|--------|-------|---------------------------------------|----------------|
| | | In. | mm | In. | mm | | |
| C300X150SL1-OL | Clear | 1.50 | 38.1 | 3.00 | 76.2 | Additional Abrasion and UV Protection | 250 |
| C400X200SL1-OL | | 2.00 | 50.8 | 4.00 | 101.6 | Additional Abrasion and UV Protection | |
| C400X400SL1-OL | | 4.00 | 101.6 | | | Additional Abrasion and UV Protection | |
| C600X175SL1-OL | | 1.75 | 44.5 | 6.00 | 152.4 | Additional Abrasion and UV Protection | |

Order number of labels required in multiples of Standard Package Quantity

Reflective Continuous Tapes for Solar Applications



- Used for illuminating or highlighting a range of objects
- Conformable material for flat applications and safety and facility identification
- Use thermal transfer resin ribbon
- Temperature Range: -40°F to 180°F (-40°C to 82°C)
- UL969 recognized, File # MH14979, cUL recognized, C22.2 No. 0.15.01, File # MH 14979

| Part Number | Color | Material | Width | | Height | | Std. Pkg. Qty. (Roll) |
|-------------|-------|-----------|-------|-------|--------|------|-----------------------|
| | | | In. | mm | Ft. | M | |
| T400X000RW1 | Red | Polyester | 4.00 | 101.6 | 50.0 | 15.2 | 1 |

Order number of labels required in multiples of Standard Package Quantity

Easy-Mark™ Labeling Software



- Quickly and easily generate labels
- Market specific labeling application tools assist in creation of identification solutions for data centers, network applications, panel shops, and construction and maintenance applications
- Saves time and money (up to 75%) with features such as WYSIWYG user interface, data import, symbol import, and pre-loaded formats
- Site license available for up to five additional installs per license
- Upgrades available at www.panduit.com

System Requirements:

- 64 MB hard drive space and 64 MB RAM (256 MB RAM recommended)
- Windows 2000, XP, Vista, 7, 8 or 10
- Mouse or compatible pointing device
- Microsoft.NET Framework 2.0 or higher
- CD-ROM Drive or USB Port



| Part Number | Color | Std Pkg. Qty | Std. Ctn. Qty. |
|-------------|--|--------------|----------------|
| PROG-EMCD3 | Easy-Mark™ Labeling Software, CD-ROM | 1 | 10 |
| PROG-EM2GO | Easy-Mark™ Portable Application, USB Flash Drive | | |

^Windows is a registered trademark of Microsoft Corp. in the United States and/or other countries.

CAD-Connect™ Labeling Software

- Facilitates quick and easy organization of identifiers from CAD for printing within Easy-Mark™ Labeling Software
- Easily captures and organizes CAD data for future use and documentation
- Saves time and reduces errors by utilizing identifiers previously created in CAD files to eliminate manual entry of data into labeling software
- Compatible with full versions of AutoCAD* 2002 to 2016 and Visio version 2002 or newer
- Exports to alternative formats such as Excel^ (XLS) or Text (CSV) files for future use and documentation
- Upgrades available at www.panduit.com

System Requirements:

- 64 MB hard drive space and 64 MB RAM (256 MB RAM recommended)
- Windows 2000, XP, Vista, 7, 8 or 10
- Mouse or compatible pointing device
- Microsoft.NET Framework 2.0 or higher
- CD-ROM Drive



| Part Number | Color | Std Pkg. Qty | Std. Ctn. Qty. |
|-------------|---|--------------|----------------|
| PROG-CCCD | CAD-Connect™ Labeling Software, including Easy-Mark™ Labeling Software, CD-ROM. | 1 | 10 |

^Visio, Windows and EXCEL are registered trademarks of Microsoft Corp. in the United States and/or other countries.

*AutoCAD is a registered trademark of Autodesk, Inc.

TDP43ME Desktop Printer and Accessories

- Creates durable, crisp, clear legends and graphics that offer superior legibility
- Prints durable legends for harsh industrial environments
- Fine resolution for small type characters and images
- Easy-Mark™ Labeling Software included with printer
- Up to 4 inches per second print speed
- Auto-sensing label gap and black mark sensors
- One-button operation, and automatic self test
- Connects quickly and easily to PC, and offers connectivity flexibility to print by USB, parallel serial, or Ethernet
- Easy ribbon loading reduces printer down time
- Able to connect to a network for sharing capability
- UL60950 listed, File # E165747



| Part Number | Part Description | Std. Pkg. Qty. |
|-----------------|---|----------------|
| TDP43ME | 300 dpi printer; includes printer, Panduit® Easy-Mark™ Labeling Software, RMEH4BL black hybrid ribbon, AC power adapter with US power cord, USB cable, user manual, quick start card, and driver disk; for use in North America | 1 |
| TDP43ME/E | 300 dpi printer; includes printer, Panduit® Easy-Mark™ Labeling Software, RMEH4BL black hybrid ribbon, EuroPlug cord, USB cable, user manual, quick start card, and driver disk; for use outside North America | |
| TDP43ME-KIT | TDP43ME printer kit. Includes: printer, Panduit® Easy-Mark™ Labeling Software, RMEH4BL black hybrid ribbon, AC power adapter with US power cord, USB cable, user manual, quick start card, TDP43ME-RS Roll Stand, TDP43ME-CASE, one roll of S100X150VATY labels, and driver disk; for use in North America | |
| TDP43ME/E-KIT | TDP43ME/E printer kit. Includes: printer, Panduit® Easy-Mark™ Labeling Software, RMEH4BL black hybrid ribbon, AC power adapter with EuroPlug cord, USB cable, user manual, quick start card, TDP43ME-RS Roll Stand, TDP43ME-CASE, one roll of S100X150VATY labels, and driver disk; for use outside North America | |
| TDP43ME-AC | Replacement AC power adapter with power cord (US cord only). | |
| TDP43ME-CASE | Hardside carrying case accommodates printer, AC power adapter, ribbons, printer cable, external roll stand, labels, and tools. | |
| TDP43ME-CUTTER | Optional power/automatic cutter for TDP43ME thermal transfer desktop printer; easy to install for automatic cutting of labels. | |
| TDP43ME-RS | External label roll stand for TDP43ME printer; used to rear feed labels that are supplied on 3" cores. | |
| TDP43ME-SPINDLE | Replacement ribbon spindle for TDP43ME Thermal Transfer Desktop Printer, Package of Two Spools. | |
| PTR-CLN | Printer cleaning kit – contains bottle of cleaning solution with MSDS, cleaning pen, swabs, alcohol wipes, and cleaning instructions. | |

TDP43ME Desktop Printer Ribbons

| Part Number | Part Description | Width | | Length | | Std. Pkg. Qty. |
|-------------|--|-------|-------|--------|------|----------------|
| | | In. | mm | Ft. | m | |
| RMEH4BL* | Black hybrid thermal transfer ribbon. Use with heat shrink, self-laminating, Turn-Tell®, tan polyimide labels, and vinyl cloth labels. | 4.25 | 108.0 | 300.0 | 91.4 | 1 |
| RMER4BL* | Black resin thermal transfer ribbon. Use with polyester labels, continuous vinyl tape, marker plates, and raised panel labels. | | | | | |
| RMER4BU | Blue resin thermal transfer ribbon. Use with polyester labels, continuous vinyl tape, marker plates, and raised panel labels. | | | | | |
| RMER4GR | Green resin thermal transfer ribbon. Use with polyester labels, continuous vinyl tape, marker plates, and raised panel labels. | | | | | |
| RMER4RD | Red resin thermal transfer ribbon. Use with polyester labels, continuous vinyl tape, marker plates, and raised panel labels. | | | | | |
| RMER4WH* | White resin thermal transfer ribbon. Use with polyester labels, continuous vinyl tape, marker plates, and raised panel labels. | | | | | |
| RMER4BL-A | Black resin thermal transfer ribbon. Use with high-temperature marker plates. | | | | | |
| RMER4BL-C | Black resin thermal transfer ribbon. Use with fluid-resistant heat shrink labels and white polyimide labels. | | | | | |

Order number of ribbons required in multiples of Standard Package Quantity.

*For 2.5" wide ribbons, replace 4 in part number with 2. For example, the part number of a 2.5" wide black hybrid thermal transfer ribbon is RMEH2BL.

TDP43HE and TDP46HE Desktop Printers and Accessories

- Convenient, easy setup; quickly begin producing labels
- Durable, clear communication through superior legibility
- Print small, fine characters and high-quality images and bar codes
- Allow continuous use in construction, industrial, and harsh environments
- Reduce time required to switch between label styles
- Fast label production without sacrificing print quality
- Easy-Mark™ Labeling Software included with printer
- Up to 8 inches per second print speed
- Connect quickly and easily to PC, and offers connectivity flexibility to print by USB, parallel, Ethernet or serial
- Available with 300 or 600 dots per inch print resolution
- Able to connect to a network for sharing capability
- UL60950 listed, File # E165747



| Part Number | Part Description | Std. Pkg. Qty |
|-------------|--|---------------|
| TDP43HE | 300 dpi printer; includes printer, Panduit® Easy-Mark™ Labeling Software, RHEH4BL black hybrid ribbon, USB cable, user manual, quick start card, driver disk and US power cord; for use in North America. | 1 |
| TDP43HE/E | 300 dpi printer; includes printer, Panduit® Easy-Mark™ Labeling Software, RHEH4BL black hybrid ribbon, USB cable, user manual, quick start card, driver disk, and the following power cords: EuroPlug, Swiss, UK, and Japan JIS 8303 3-pin; for use outside North America. | |
| TDP46HE | 600 dpi printer; includes printer, Panduit® Easy-Mark™ Labeling Software, RHEH4BL black hybrid ribbon, USB cable, user manual, quick start card, driver disk, and US power cord; for use in North America. | |
| TDP46HE/E | 600 dpi printer; includes printer, Panduit® Easy-Mark™ Labeling Software, RHEH4BL black hybrid ribbon, USB cable, user manual, quick start card, driver disk, and the following power cords: Europlug, Swiss, UK, and Japan JIS 8303 3-pin; for use outside North America. | |
| PTR-CLN | Printer cleaning kit - contains bottle of cleaning solution with MSDS, cleaning pen, swabs, alcohol wipes, and cleaning instructions. | |

TDP43HE and TDP46HE Desktop Printer Ribbons

| Part Number | Part Description | Width | | Length | | Std. Pkg. Qty. |
|-------------|---|-------|-------|--------|-------|----------------|
| | | In. | mm | Ft. | m | |
| RHEH4BL | Black hybrid thermal transfer ribbon. Use with heat shrink, self-laminating, Turn-Tell®, and vinyl cloth and tan polyimide labels. | 4.33 | 110.0 | 1181.0 | 363.0 | 1 |
| RHER4BL | Black resin thermal transfer ribbon. Use with polyester labels, continuous vinyl tape, marker plates, and raised panel labels. | | | | | |
| RHER4WH | White resin thermal transfer ribbon. Use with polyester labels, continuous vinyl tape, marker plates, and raised panel labels. | | | | | |
| RHER4BL-A | Black resin thermal transfer ribbon. Use with high-temperature marker plates. | 4.33 | 110.0 | 1345.0 | 410.0 | |
| RHER4BL-C | Black resin thermal transfer ribbon. Use with fluid resistant heat shrink markers and white polyimide labels. | | | | | |
| RHER4BL-E | Black resin thermal transfer ribbon. Used with standard marker plates and component labels for extra durability for harsh environments. | | | | | |

Order number of ribbons required in multiples of Standard Package Quantity.

Real-World Solutions

With a proven reputation for excellence and innovation, Panduit and our partners work with you to overcome challenges and implement real-world solutions that create a competitive business advantage. Panduit offers the broadest range of solutions, from data centers and intelligent buildings to manufacturing operations, to help you build a smarter, unified business foundation.

Technology Leadership

Panduit develops innovative physical infrastructure solutions that meet the rapidly changing needs of our clients, from hardware and software to advisory services. This commitment is supported by investment in advanced research, solutions-focused product development, world-class manufacturing, and collaboration with customers at the forefront of technology.

Partner Ecosystem

Our best-in-class partner ecosystem offers a comprehensive portfolio of services that span the project lifecycle, from planning and design to delivery, deployment, maintenance, and operation. Panduit business partners – distributors, and certified architects, consultants, engineers, designers, system integrators, and contractors – are qualified to help you achieve your objectives and realize predictable and measurable results.

Strategic Alliances

Panduit cultivates long-term strategic alliances with industry leaders, including Cisco Systems, EMC, IBM, and Rockwell Automation, to develop, optimize, and validate solutions for our customers. This investment in people and resources helps solve our customers' greatest business challenges.

Global Business Commitment

Panduit is committed to delivering a consistently high level of quality and service the world over. With a presence in more than 100 countries, local Panduit sales representatives and technical specialists offer guidance and support that bring value to your business. Our global supply chain, which includes manufacturing, customer service, logistics, and distribution partners, provides prompt response to your inquiries and streamlines delivery to any worldwide destination.

Sustainability

With a commitment to environmental sustainability, Panduit develops and implements solutions that protect, replenish, and restore the world in which we live. This commitment is demonstrated by Panduit's LEED Gold certified World Headquarters, leveraging the Unified Physical InfrastructureSM approach to enable convergence of critical building systems to drive energy efficiency and ongoing operational improvement.

Transform Your
Physical Infrastructure

Call or visit us online,
we can show you how.

Panduit® Corp.
World Headquarters
Tinley Park, IL 60487

cs@panduit.com
US and Canada: 800.777.3300
Europe, Middle East, and Africa:
44.20.8601.7200
Latin America: 52.33.3777.6000
Asia Pacific: 65.6305.7575

www.panduit.com

PANDUIT®