

3" Core Circuit Board ID Materials:

B-728 Ultra Durable Polyimide Material

Color: White Finish: Matte

White 2 mil high temperature polyimide material with an ultra durable adhesive designed for use with extreme wash protocol and cleaning chemicals. Special matte topcoat prevents solder balls from sticking to the label after wave soldering.

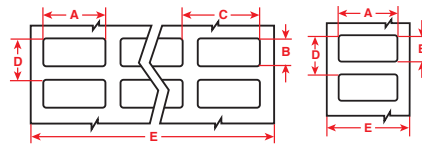


Figure 1

Figure 2



Performance Attributes: 

Diagram	Catalog #	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Horiz. Repeat C Inch (mm)	Vert. Repeat D Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Labels Per Pkg	Rec. Ribbon
Fig. 2	THT-99-728-10	Polyimide	White	0.500 (12.7)	0.500 (12.7)	-	0.350 (8.89)	1.700 (43.18)	1	10,000	R6000
Fig. 1	THT-14-728-10	Polyimide	White	0.650 (16.5)	0.200 (5.1)	-	0.375 (9.53)	3.200 (81.28)	1	2,500	R6000
Fig. 1	THT-1-728-10	Polyimide	White	0.750 (19.0)	0.250 (6.4)	1.500 (38.10)	0.350 (8.89)	3.350 (85.09)	2	10,000	R4300
Fig. 2	THT-46-728-10	Polyimide	White	0.750 (19.0)	0.250 (6.4)	0.800 (20.32)	0.350 (8.89)	3.350 (85.09)	4	10,000	R4300
Fig. 2	THT-103-728-10	Polyimide	White	1.000 (25.4)	0.250 (6.4)	1.500 (38.10)	0.250 (6.35)	3.350 (85.09)	2	10,000	R4300
Fig. 2	THT-59-728-10	Polyimide	White	1.000 (25.4)	0.500 (12.7)	-	0.350 (8.89)	1.700 (43.18)	1	10,000	R6000
Fig. 2	THT-43-728-10	Polyimide	White	1.250 (31.8)	0.250 (6.4)	-	0.350 (8.89)	1.450 (36.83)	1	10,000	R6000

3" Core Circuit Board ID Materials:

B-729 Ultra Durable Polyimide Material

Color: White Finish: Matte

High temperature low profile (1 mil) polyimide material with an ultra durable adhesive designed for use with extreme wash protocol and cleaning chemicals. The reduced profile is ideal for processes requiring thin or lighter weight materials. Special matte topcoat prevents solder balls from sticking to the label after wave soldering.

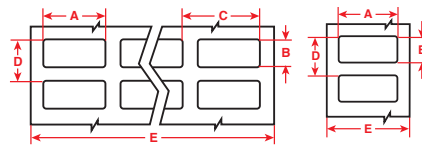


Figure 1

Figure 2



Performance Attributes: 

Diagram	Catalog #	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Horiz. Repeat C Inch (mm)	Vert. Repeat D Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Labels Per Pkg	Rec. Ribbon
Fig. 2	THT-104-729-20	Polyimide	White	0.315 (8.0)	0.177 (4.5)	-	0.600 (15.24)	1.200 (30.48)	1	10,000	R6000
Fig. 1	THT-1-729-10	Polyimide	White	0.750 (19.0)	0.250 (6.4)	1.075 (27.31)	0.600 (15.24)	3.350 (85.09)	3	10,000	R4300
Fig. 2	THT-103-729-10	Polyimide	White	1.000 (25.4)	0.250 (6.4)	-	0.475 (12.07)	1.200 (30.48)	1	10,000	R6000
Fig. 2	THT-45-729-10	Polyimide	White	1.500 (38.1)	0.250 (6.4)	-	0.375 (9.53)	0.100 (2.54)	1	12,000	R6000
Fig. 2	THT-48-729-10	Polyimide	White	2.000 (50.8)	0.250 (6.4)	0.438 (11.13)	0.475 (12.07)	3.200 (81.28)	7	10,000	R6000
Fig. 2	THT-16-729-2.5	Polyimide	White	3.000 (76.2)	0.250 (6.4)	-	0.300 (7.62)	0.850 (21.59)	1	10,000	R6000

Did You Know? - Technical Data Sheets

Looking for more information regarding a certain Brady material?

Brady offers online access to Technical Data Sheets for all Brady materials. View by a specific B-Number or search by relevant keywords.

Visit www.BradyID.com/techdata for more information.

