


Heavy Wall UL Types MTW, AWM and NEC Type THW

90°C 600 Volts

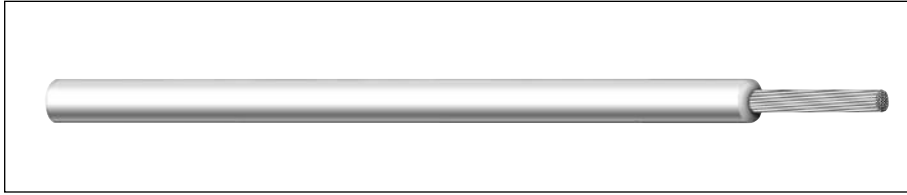

AWM, MTW, THW - 600 VOLT - UL

CATALOG NUMBER	AWG. SIZE	COND. STRAND	NOMINAL INS. THICKNESS		NOMINAL O.D.		APPROX. NET WT. LBS/M ^(S)
			INCHES	mm	INCHES	mm	
76954	6	19/.0372	0.060	1.52	0.315	8.00	110
76994	4	19/.0469	0.060	1.52	0.365	9.27	150

^(S) Actual shipping weight may vary.

Product Construction:

Conductor:

- 6 and 4 AWG. fully annealed stranded bare copper per ASTM B-8

Insulation:

- Premium-grade, color-coded PVC, Black
- Temperature Range: -40°C to +90°C

Jacket Marking:

- CAROL 6 AWG. 600V E# MTW OR THW (UL) OR AWM

Applications:

- Motor and transformer lead
- External wiring of machinery

Features:

- Outstanding oil, flame and moisture resistance
- Extra flexible

Industry Approvals:

- UL Type AWM
- UL and NMTBA Type MTW
- NEC Type THW
- Passes UL VW-1 Vertical Flame Test
- RoHS Compliant

Packaging:

- 500' (152.4 m) reels
- Other put-ups available on special order



Passes UL VW-1 Flame Test
Underwriters Laboratories, Inc.

