

## **AWC102 Telecommunications Interconnect Cable Multi-conductor Shielded - Flat (Oval)**



Flat (oval) multi-conductor shielded modular type telecommunications interconnect cable consisting of stranded bare or tinned copper conductors with thermoplastic insulation and a 28 AWG stranded tinned copper drain wire with an overall 100% coverage aluminum/polyester shield in a PVC (Polyvinyl chloride) jacket.

AWC Standard Number	Number of Conductors	AWG & Stranding	Insulation Thickness (Nom. In.)	Jacket Thickness (Nom. In.)	Outside Dimension (Nom. In.)
AWC10201	4	24-7/32-TSC	0.007	0.033	0.106 X 0.214
AWC10202	4	26-7/34-BSC	0.009	0.033	0.106 X 0.214
AWC10203	4	28-7/36-BSC	0.011	0.033	0.106 X 0.214
AWC10204	4	28-7/36-TSC	0.011	0.033	0.106 X 0.214
AWC10205	4	TINSEL	0.008	0.033	0.106 X 0.214

**NOTE**

Color code: 1) Blk, 2) Red, 3) Grn, 4) Yel

Available jacket colors: A = Black W= Silver Satin


Available put-ups: 500, 1,000, 2,500, 5,000, 10,000 foot reels

Ordering example: AWC10201-A-500

This color code is commonly used with 4 position modular plugs and also used with 6 position modular plugs utilizing positions 2, 3, 4 and 5 and also used with 8 position UNKEYED and KEYED modular plugs utilizing positions 3, 4, 5, and 6.

Other color codes and/or jacket colors available upon request. UL Recognition labeling available upon request.

## **AWC102 Telecommunications Interconnect Cable Multi-conductor Shielded - Flat (Oval)**

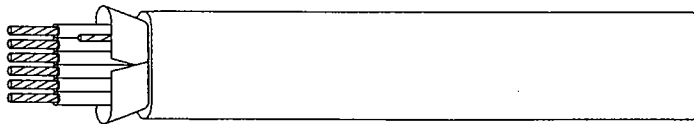

Flat (oval) multi-conductor shielded modular type telecommunications interconnect cable consisting of stranded bare or tinned copper conductors with thermoplastic insulation and a 28 AWG stranded tinned copper drain wire with an overall 100% coverage aluminum/polyester shield in a PVC (Polyvinyl chloride) jacket.

AWC Standard Number	Number of Conductors	AWG & Stranding	Insulation Thickness (Nom. In.)	Jacket Thickness (Nom. In.)	Outside Dimension (Nom. In.)
AWC10206	6	24-7/32-TSC	0.007	0.033	0.106 X 0.287
AWC10207	6	26-7/34-TSC	0.009	0.033	0.106 X 0.287
AWC10208	6	28-7/36-BSC	0.011	0.033	0.106 X 0.287
AWC10209	6	28-7/36-TSC	0.011	0.033	0.106 X 0.287
AWC10210	6	TINSEL	0.008	0.033	0.106 X 0.287

**NOTE**

Color code: 1) Wht, 2) Blk, 3) Red, 4) Grn, 5) Yel, 6) Blu

Available jacket colors: A = Black W= Silver Satin

Available put-ups: 500, 1,000, 2,500, 5,000, 10,000 foot reels

Ordering example: AWC10206-A-500

This color code is commonly used with 6 position modular plugs.

Other color codes and/or jacket colors available upon request.

UL Recognition labeling available upon request.