

AXS System For Millwork And In-Wall



Specify an AXS when installing audio and video equipment flush into a wall or cabinet; ideal for larger systems.

The patented pull-out design provides access to rear equipment connections. Entire bays of equipment can be rolled out for service and installation flexibility.

Structural Features

- Unique mechanically interlocking corner joint provides exceptional strength & eases assembly
- Telescoping service stand elevates service tracks to bottom of AXS, allowing it to pull out
- Service tracks include built-in level to reduce installation and servicing time
- Removable rack frame can be integrated off-site to save time
- Standard fixed front and rear heavy-gauge, 10-32 threaded rackrail with numbered rackspace increments speeds equipment mounting
- Finished in a durable black textured powder coat

Cable Management

- Articulating cable carriers attach to rack frame for effective cable management (non-rotating models only)

Regulatory / Certifications

- Up to 650 lb. weight capacity with proper weight distribution
- GREENGUARD Indoor Air Quality Certified for Children and Schools (the most strict level)

GREENGUARD Indoor Air Quality Certified | RoHS | US Patent #5,443,312 | EIA/TIA Compliant

Spec. # 96-055M for full product info. (AXS)

Spec. # 96-01000 for full product info. (AX-SXR)

Installation by Intra Home Systems



AXS shown in open position



AX-SXR rotating slide out rack

Recommended Power Chart	
Power Strip*	Size
C	10 space and up
C E	17 space and up
C E G	21 space and up
E G J	25 space and up
G J N	35 space and up
N P R T	41 space and up

*see pgs. 96-117


Part #		Ext. Length	Frame Depth	Weight Capacity	Rough Opening Width	Rough Opening Width When Using Gasket & Guide Kit	Rotating
AXS-xx-26	xx equals # of useable space (15 to 43 space)	48"	26"	650 lbs.	19-1/4"	19-5/8"	no
AXS-xx	xx equals # of useable space (15 to 43 space)	48"	20"	650 lbs.	19-1/4"	19-5/8"	no
AX-SXR-xx	xx equals # of useable space (15 to 43 space)	31"	20"	450 lbs.	19-1/4"	19-5/8"	yes
AX-SX-xx	xx equals # of useable space (10 to 43 space)	25"	20"	650 lbs.	19-1/4"	19-5/8"	no
SAX-xx	xx equals # of useable space (15 to 43 space)	48"	16-1/2"	650 lbs.	19-1/4"	19-5/8"	no
SSAX-xx	xx equals # of useable space (15 to 43 space)	25"	16-1/2"	650 lbs.	19-1/4"	19-5/8"	no

Service Tracks* - pair of removable service tracks			
Part #	Use With	Track Length	Rack Frame Ext. Depth
TRACK25	AX-SX, SSAX	25"	25"
TRACK31	AX-SXR	31"	31"
TRACK50	AXS, SAX, AXS-xx-26	50"	48"


*required for installing and servicing

Service Stands* - removable telescoping stand that supports & levels the service tracks	
Part #	Height Range Off the Floor
TRACKL	2-1/4" to 3-1/4"
TS310	3" to 11"
TS1022	10" to 22"
TS1640	16" to 40"

*required for installing and servicing

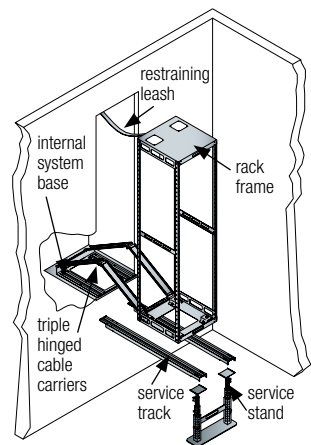

AXS, AX-SX, SAX, SSAX slide out rack

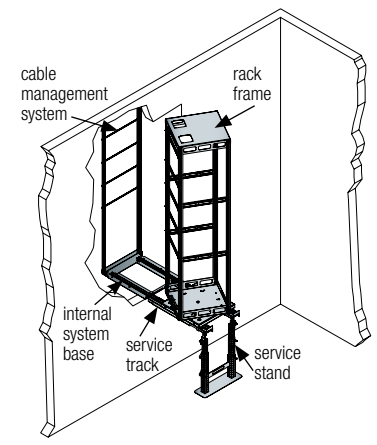

AX-SXR slide out rack

AXS System For Millwork And In-Wall

