


0.430±0.015

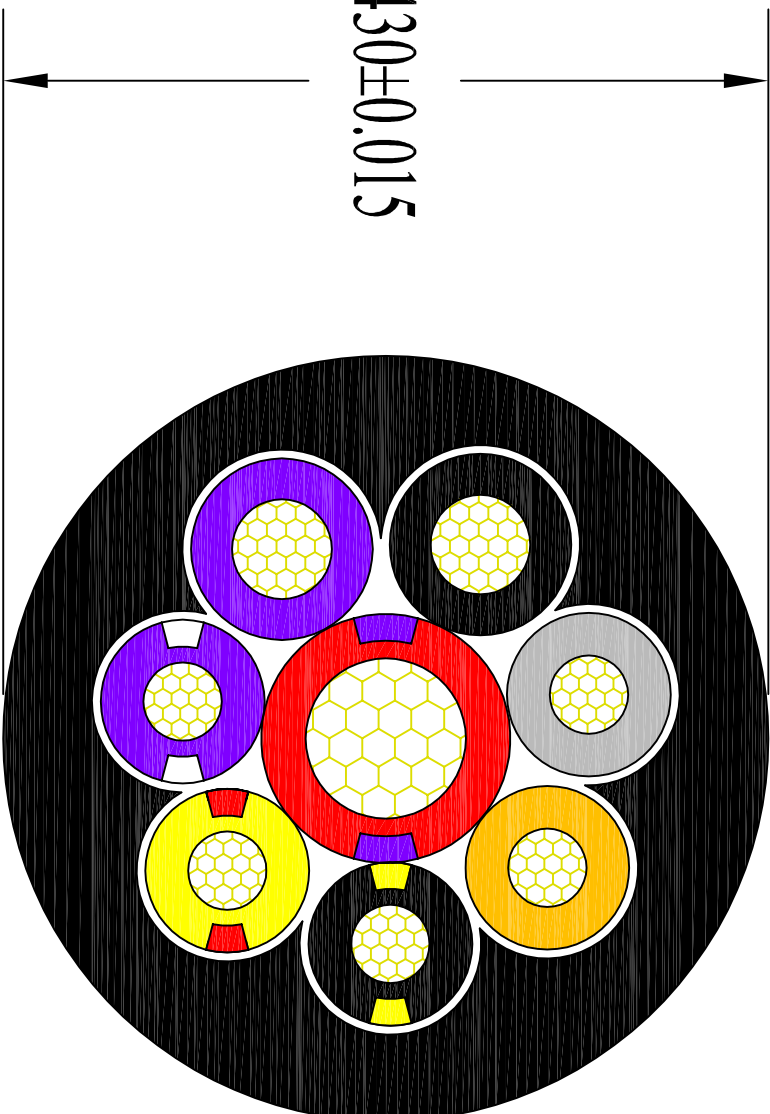

NOTES:

1) Inner:

- (1) 12 19/25 BC GPT per SAE J1128, Ø=0.142±0.003"
- (2) 16 19/29 BC GPT per SAE J1128, Ø=0.103±0.003"
- (5) 18 16/30 BC GPT per SAE J1128, Ø=0.092±0.003"

2) Fillers: None

3) Separator: Paper

4) Jacket: Black PVC, 80°C, 73-A, Nom. Wall = 0.025, Min

Wall = 0.020, Pressure Extrusion

- 5) Colors: SGR(18),ETN(18),BLK/SYL(18),SYL/DRD(18),PUR/WH(18),PUR(16),BLK(16),DRD/PUR(12) in center

6) Print: None

Revisions:

| DATE | REV | ECN | CHANGE |
|-----------|-----|--------|------------------------|
| 7/14/2011 | A | E18341 | SPECIFICATION CREATED |
| 5/12/2015 | B | | UPDATED SEPARATOR NOTE |
| | | | |
| | | | |

Coleman Cable, Inc.

1115 W. Plymouth St.

Bremen, IN 46506

By: Rich Trembley