



DESC: 16/2 18/6 CABLE 125°C 300V

DWG NO: 1608C009

SCALE: 15x

DATE: 4/20/04

DR. BY: DP LANGER

NWI NO: FCAB168C-003

ITEM

SPECS.


- A. 18 GAUGE TXL CONDUCTOR SUPPLIED BY IEWC
.078 NOMINAL O.D.
- B. POLY FILLER
- C. 16 GAUGE TXL CONDUCTOR SUPPLIED BY IEWC
.090 NOMINAL O.D.
- D. ALUMINUM FOIL SHIELD, FOIL IN
25% MIN. OVERLAP 100% COVERAGE
- E. 20 GAUGE 7x.0121TC DRAIN
- F. 30 MILS PRESSURED TPE JACKET 125°C 300V
24 MILS MIN. TPE JACKET BLACK JACKET
CABLE IS NOT UL OR CSA APPROVED

CUSTOMER: INDUSTRIAL ELECTRIC

CUSTOMER P/N: TRC0008T-0

NORTHWIRE RESTRICTED

This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.

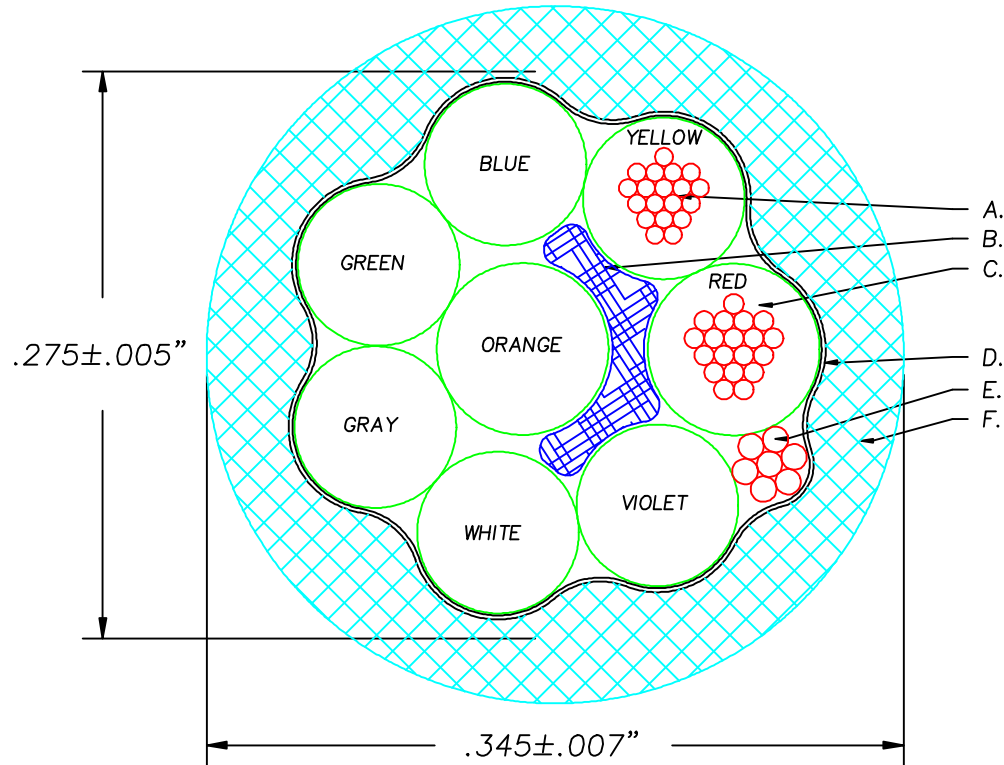

ELECTRICAL REQUIREMENTS:
NONE SPECIFIED

MECHANICAL REQUIREMENTS:
NONE SPECIFIED

CHANGED COND. O.D. FROM .088	D	1/30/08	KAD	
ADDED NWI AND IEWC P/N'S	C	5/23/04	DPL	
CHANGED FROM NWI BUILT CONDUCTORS TO SUPPLIED CONDUCTORS, DEFINED CONDUCTOR COLORS AND ROTATION	B	5/5/04	DPL	
INITIAL RELEASE	A	4/20/04	DPL	
REVISION RECORD	REV	REV DATE	APPROVAL	APPROVAL