



DESC: 16/2 18/6 CABLE 125°C 300V

DWG NO: 1608C013

ITEM SPECS.

SCALE: 15x

DATE: 1/18/06

DR. BY: DP LANGER

NWI NO: FCAB168C-004

A. PURCHASED 18 GAUGE TXL CONDUCTOR
.078 NOMINAL O.D.

B. POLY FILLER

C. PURCHASED 16 GAUGE TXL CONDUCTOR
.090 NOMINAL O.D.

D. ALUMINUM FOIL SHIELD, FOIL IN
25% MIN. OVERLAP 100% COVERAGE

E. 20 GAUGE 7x.0121TC DRAIN


F. 30 MILS PRESSURED TPE JACKET 125°C 300V
24 MILS MIN. TPE JACKET BLACK JACKET
CABLE IS NOT UL OR CSA APPROVED

CUSTOMER: INDUSTRIAL ELECTRIC

CUSTOMER P/N: TRC0008T-0_1_A1

NORTHWIRE RESTRICTED

This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.

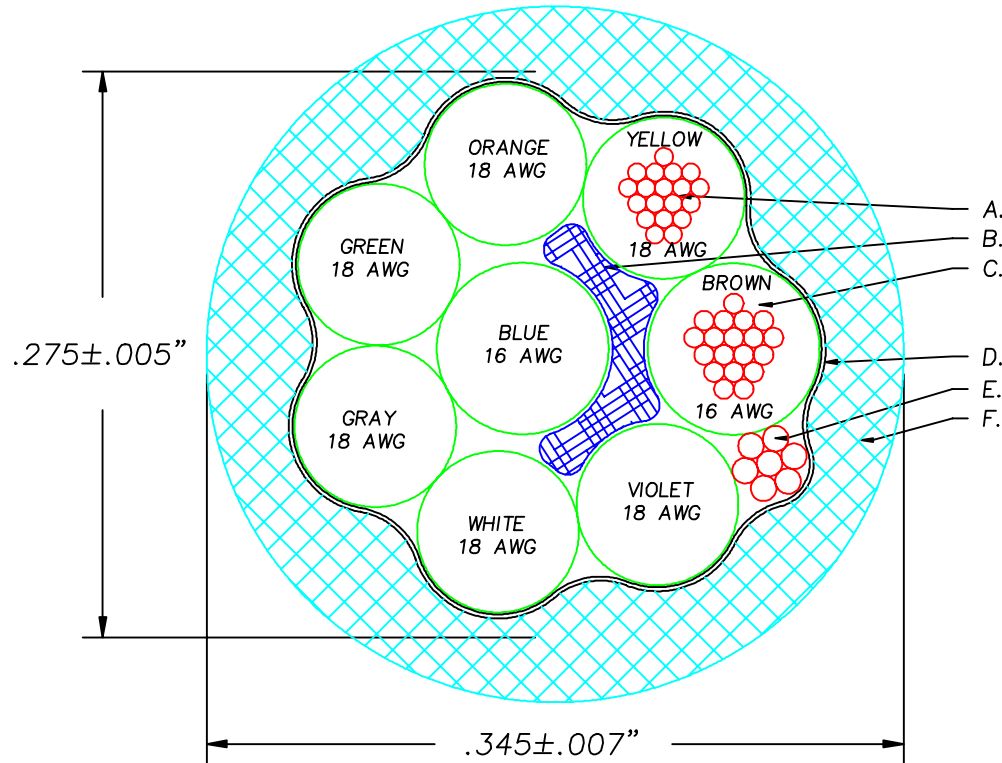

ELECTRICAL REQUIREMENTS:
NONE SPECIFIED

MECHANICAL REQUIREMENTS:
NONE SPECIFIED

WAS CUSTOMER SUPPLIED CONDUCTORS; CHANGED CUSTOMER PART NUMBER	D	9/8/11	DPL	
CHANGED COND. O.D. FROM .088	C	1/30/08	KAD	
ADDED NWI & IEWC P/N'S; 16 GAUGE BROWN WAS DOWN CENTER	B	1/20/06	DPL	
INITIAL RELEASE	A	1/18/06	DPL	
REVISION RECORD	REV	REV DATE	APPROVAL	APPROVAL