


Trailer Cable 16/2 Wht & Blk

- Conductors:** 16 AWG 19 strands bare copper
- Insulation:** Type TXL XLPE to SAE-J-1128
- Thickness:** .016" Nominal
- Diameter:** .088" ± .004"
- Cable Core:** 2 conductors cabled (twisted) together with 20(19) Drain and overall foil shield (25% overlap)
- Color Code:** Wht & Blk
- Jacket:** .030" Black TPE (Pressure Extruded)
- Fillers:** Polypropylene filler as required for roundness
- Finished Cable:** .250" Nominal O.D.
- Ratings:** -40°C to 125°C

RoHS Compliant

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

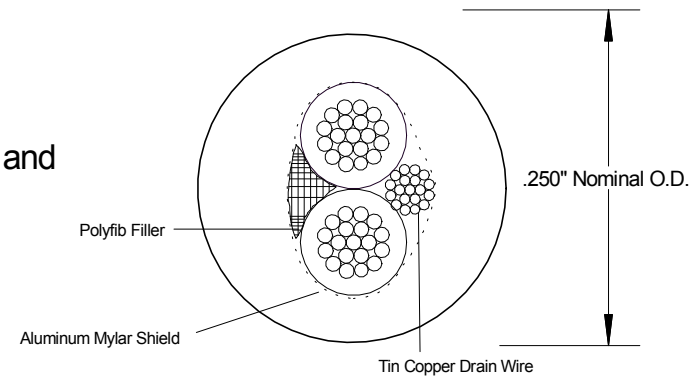

Product Specification

<small>Drawn By:</small> Brian Hanlon	<small>Product Description:</small> 18 AWG 2 Conductor TXL/TPE Cable	<small>REV</small> 1
<small>Date:</small> Oct 2, 2012	<small>Drawing No.:</small>	