




| | |
|----------------------------|-------------------------------|
| DESC: 18/2 CABLE 125C 300V | DWG NO: FCAB182-088N |
| SCALE: 25X | DATE: 7/26/12 |
| DR. BY: DPL | NWI P/N: FCAB182-088N |
| CUSTOMER: IEWC | CUSTOMER P/N: TRC1802T-0-42_A |

This document contains proprietary and confidential information of Northwire, Inc. (and its subsidiary) and shall not be used, disclosed or reproduced, in whole or in part, for any purpose without the prior written consent of Northwire, Inc. (and its subsidiary).

Disclaimer: The technical data that is made part of this document may be subject to the International Traffic in Arms Regulation (ITAR) and the Export Administration Regulations (EAR). Disclosure of technical data to Foreign Persons in the course of employment with U.S. contractors is considered an export and is subject to the ITAR and EAR export licensing requirements/regulations.

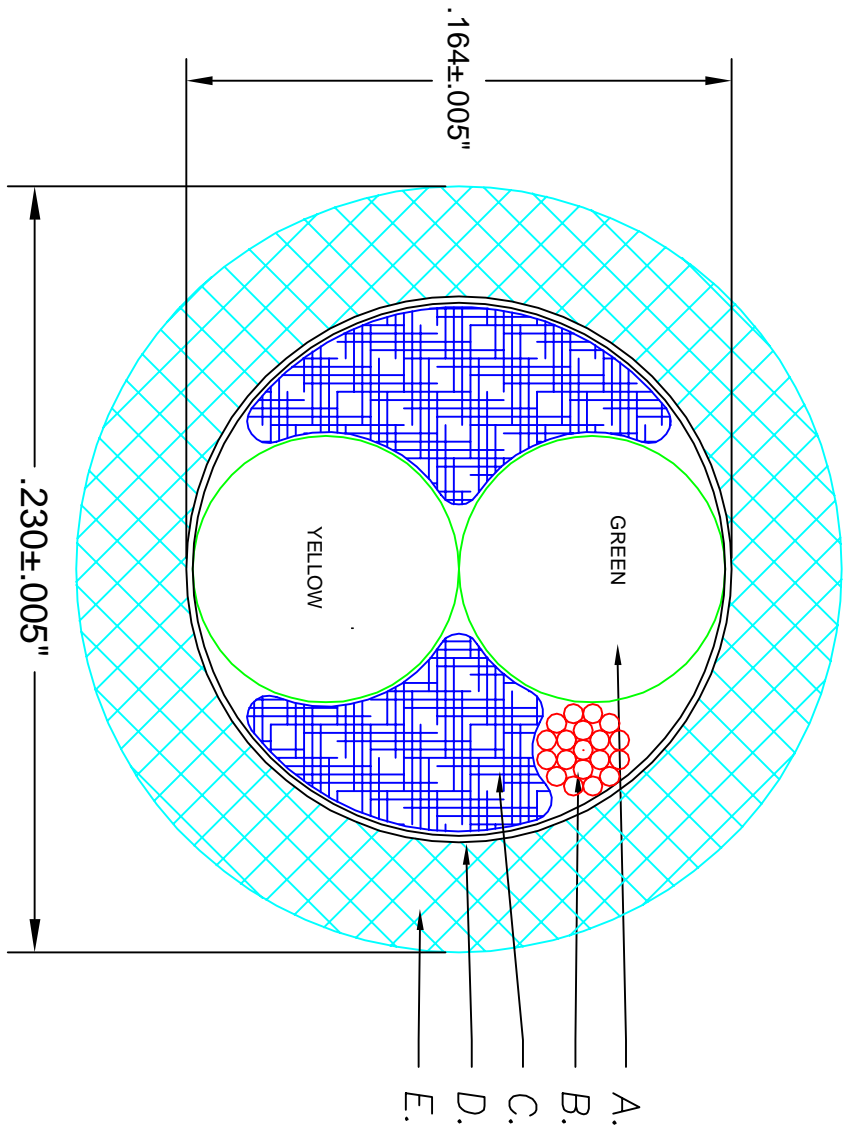

| ITEM | SPECS. |
|------|---|
| A. | 18 GAUGE 19 STRANDS TXL CONDUCTORS PURCHASED FROM IEWC .080 NOMINAL O.D. |
| B. | 20 GAUGE 19x.0073TC DRAIN |
| C. | POLY FILLER |
| D. | ALUMINUM/MYLAR FOIL SHIELD: FOIL IN 25% MIN. OVERLAP 100% COVERAGE |
| E. | 30 MIL PRESSURED TPE JACKET 125C 300V 24 MIL MIN. TPE JACKET BLACK JACKET CABLE IS NOT UL OR CSA APPROVED |

- A.
- B.
- C.
- D.
- E.

ELECTRICAL REQUIREMENTS:
NONE SPECIFIED

MECHANICAL REQUIREMENTS:
NONE SPECIFIED

CORE DIMENSIONS FOR INTERNAL USE ONLY

| UPDATED SPECS VERBIAGE AS REQUESTED | D | 8/20/12 | DPL |
|---|-----|----------|------------------|
| WAS PVC JACKET AT 105C | C | 8/16/12 | DPL |
| ADDED POLY FILLER: ADDED ALUMINUM FOIL SHIELD AND DRAIN | B | 8/15/12 | DPL |
| INITIAL RELEASE | A | 7/26/12 | DPL |
| REVISION RECORD | REV | REV DATE | APR 1 APR 2 QA R |