



## Drawing Number 5037 Revision 2

Industrial Electric Part Number: TRC2004PU-0-019X

4 Conductor 20 AWG Polyurethane Jacketed Cable

Conductors: 20 AWG 7/28 Bare Copper

Insulation: XLP Type TXL O.D.: .070"

Color Code: Black – White – Red – Dark Green


Cable: No fillers, tapes or wraps

Jacket: Black Polyurethane (Flat Matt)  
Nominal Thickness: .045"

Nominal Cable Diameter: .260"

Note #1: Insulated conductors supplied by Industrial Electric  
Industrial Electric conductor Part Number TXL 20

\*\*\*\*Color Code Rotation at loose end of spool should be same as below.  
(Re spool if necessary)

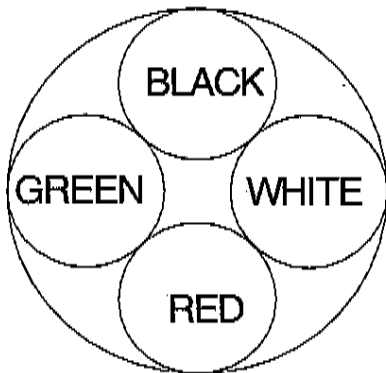



### Drawing Number 5077 Revision 3

Industrial Electric Part Number: TRC1604S-8-0129

4 Conductor 16 AWG jacketed cable

Conductors: 16 AWG 19/29 Bare Copper

Insulation: XLP O.D.: .122"

Color Code: 1 Conductor Black  
1 Conductor Red

Jacket: PVC Gray  
Nominal Thickness: .035"

Nominal Cable Diameter: .350"

Add slip agent as required (if required for strip ability)

Note #1: Insulated conductors supplied by Industrial Electric  
Industrial Electric conductor Part Number SXL 16

Note #2: Revised March 19, 2007 to eliminate fillers and mylar wrap.

