


20/5 UTW TRL CABLE

3/31/2010

0.235±0.010

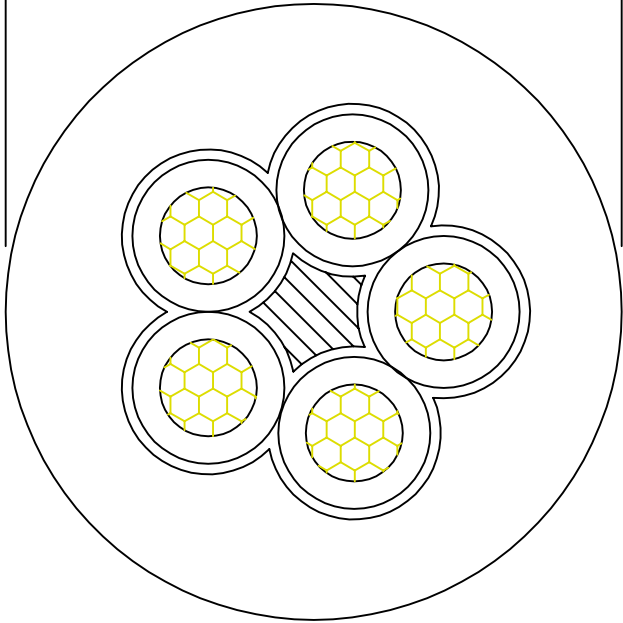

NOTES:

1. Inners: 20 7/28 BC PVC Insulated WTB per SAE J1678,  $\phi = 0.058 \pm 0.003$ "
2. Color Pattern: TBD
3. Filler: Paper in Center (as needed)
4. Separator: Paper and Tale Powder (as needed)
5. Jacket: Black PVC, 80°C, Hardness 73-A, Nominal Wall = 0.035", Minimum Wall = 0.024", Pressure Extrusion
6. Print: No Print

Revisions:

DATE	REV	ECN	CHANGE	
3/31/2010	A	#07055	COST REQUEST	
<b>Coleman Cable Inc.</b>				
1115 W. Plymouth St.				
Bremen, IN 46506				
By: Nikki Nolan				