

CFHR

INSULATE
SEAL
PROTECT

6:1
SHRINK RATIO



HIGH RATIO, FLAME RETARDANT CROSS-LINKED POLYOLEFIN TUBING

High ratio heat shrink tubing accommodates extreme differences between cables, connectors and backshells

FEATURES AND BENEFITS


- Up to 6:1 shrink ratio
- Flame retardant
- Accommodates a wide variety of connector shapes and configurations
- Available in semi-rigid or flexible material
- Optional thermoplastic adhesive liner for complete environmental protection and insulation
- Available in 25 ft reels
- Continuous operating temperature: -55°C to 110°C
- Shrink temperature: 120°C

STANDARDS

- Meets material properties of SAE- AMS- DTL 23053/15

TYPICAL APPLICATIONS

- Wire harnesses
- Abrasion and impact resistance
- Strain relief and protection of cables and connectors

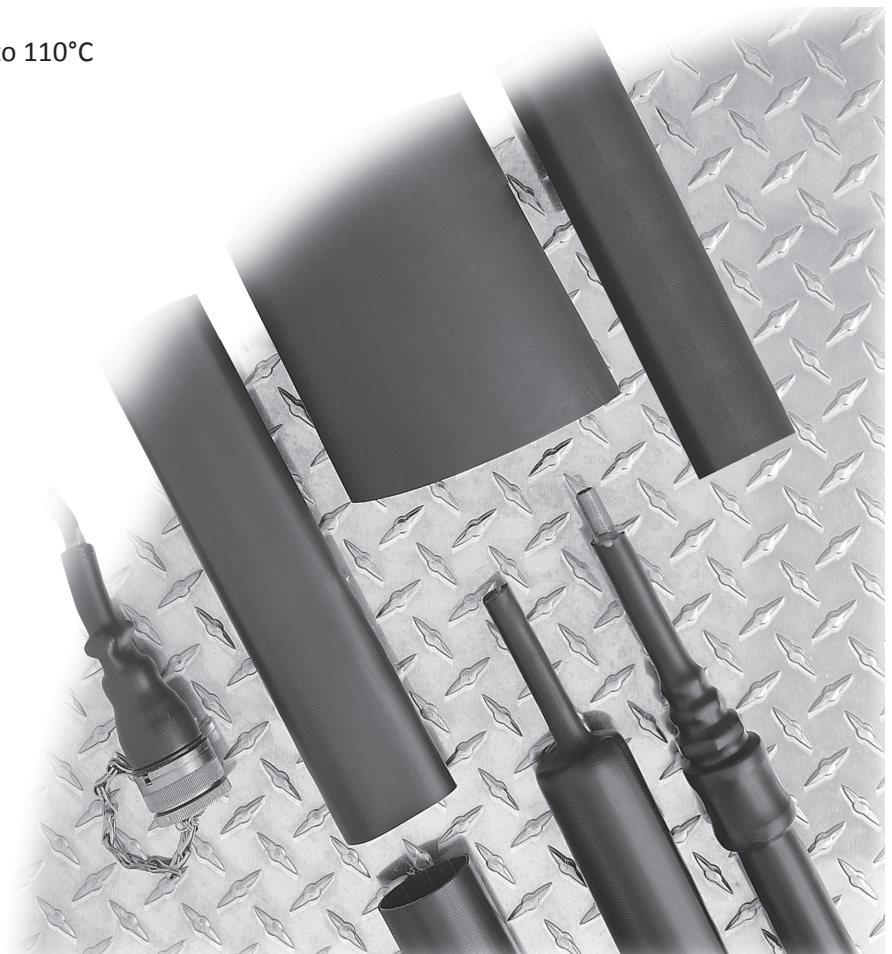

HIGH RATIO, FLAME RETARDANT CROSS-LINKED POLYOLEFIN TUBING

CFHR


DIMENSIONS

CFHR SEMI-RIGID

ORDER NUMBER	EXPANDED		RECOVERED				LENGTHS	
	INTERNAL DIAMETER (MIN) D		INTERNAL DIAMETER (MAX) d		WALL THICKNESS (MIN) W			
	MM	IN	MM	IN	MM	IN	M	IN
0750	19.0	0.750	3.2	0.125	3.2	0.123	1.2	48
1300	33.0	1.300	5.5	0.220	3.4	0.135	1.2	48
1750	44.4	1.750	7.4	0.290	3.6	0.140	1.2	48
2000	50.8	2.000	8.3	0.330	4.3	0.170	1.2	48
2750	69.8	2.750	11.7	0.460	4.8	0.190	1.2	48
3500	88.9	3.500	17.1	0.673	4.3	0.170	1.2	48
4700	119.4	4.700	22.9	0.900	4.8	0.190	1.2	48

CFHR FLEXIBLE

ORDER NUMBER	EXPANDED		RECOVERED				LENGTHS	
	INTERNAL DIAMETER (MIN) D		INTERNAL DIAMETER (MAX) d		WALL THICKNESS (MIN) W			
	MM	IN	MM	IN	MM	IN	M	IN
1250	31.8	1.25	5.6	0.220	1.5	0.060	1.2	48
1750	44.4	1.75	8.0	0.315	2.4	0.095	1.2	48
2500	63.5	2.50	12.7	0.500	3.0	0.120	1.2	48
3000	76.2	3.20	19.1	0.750	3.6	0.140	1.2	48

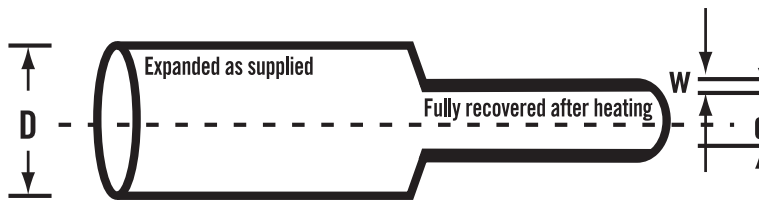

ORDERING

- Select a dimension which will shrink snugly over the component to be covered. If recovery is restricted the resulting wall thickness will be less than specified.
- Select Options:
 - Wall Thickness: Semi-Rigid or Flexible
 - Printing: Printed or Unprinted
 - Adhesive Lining: Lined (D) or Unlined (U)
 - Lengths: 6, 12 or 48 inches, or 25 ft spools (unlined only)
- Please specify the product name, order number and options you require
- Order Example: CFHR, 0750, black, unprinted, unlined, 25 ft lengths

Please contact your Customer Service Representative for information on custom colors, sizes, lengths and material data sheet.