

**AP2000 Special Sizes
Modified Polyolefin, Adhesive Lined
Heat - Shrinkable Tubing**

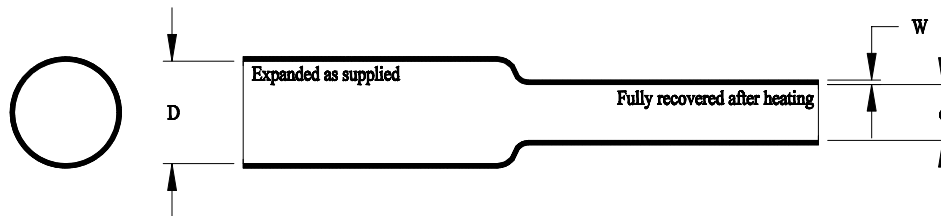


Table 1: Dimensions

Size	Inside Diameter				Recovered Wall Thickness, Nominal (W)	
	As Supplied Minimum (D)		Recovered Maximum (d)			
	in	mm	in	mm	in	mm
No. 103	.788	20.0	.354	9.0	.039	1.0
No. 104	.906	23.0	.591	15.0	.039	1.0
No. 105	1.024	26.0	.709	18.0	.039	1.0
No. 106	1.182	30.0	.591	15.0	.039	1.0
No. 107	.748	19.0	.291	7.4	.056	1.4
No. 108	1.024	26.0	.354	9.0	.039	1.0

The tubing shall meet the requirements of RW-1001.

Material

The outer jacket shall be fabricated from modified polyolefin and shall be crosslinked. The inner jacket shall be a melttable adhesive.

The dual wall tubing shall be homogeneous, free from flaws, defects, bubbles, pinholes, seams, cracks or inclusions and each wall shall be uniform.

Specification Control Drawing

tyco <i>Electronics</i>	Tyco Electronics Corporation 300 Constitutional Drive Menlo Park, CA 94025 USA		Raychem	Title: AP2000 Special Sizes Modified Polyolefin, Adhesive Lined Heat - Shrinkable Tubing		
	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application			Document No : AP2000 Tubing (Special Sizes)		
Cage Code: 06090	Scale: None	Size: A	Rev. Date: 3-Mar-03	Rev.: D	Sheet: 1 of 1	

If this document is printed it becomes uncontrolled. Check for the latest revision.