


# PRODUCT SPECIFICATION

<i>DATE</i>	<i>REV</i>	<i>ECN</i>	<i>DESCRIPTION</i>
1/6/2006	D	10863	UPDATED DESCRIPTION

**Parent Number:** F18025-

**Description:** 18 19/.0092 BC TXL per J1128 ESB-M1L123-A MS-8288

**DIAMETER:** 0.078  
**TOLERANCE ± :** 0.003

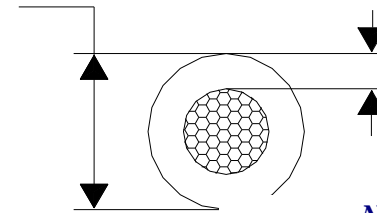

**NOM WALL:** 0.016

**MINIMUM WALL:** 0.013

**Stranding:** 19/.0092 BC LHL

**Style:** TXL per SAE J 1128, Ford ESB-M1L123-A, Chrysler MS-8288

**Insulation:** XLPE

**Print Legend:** NO PRINT

**Voltage:** Per SAE J 1128 this product is intended for use at a nominal system voltage of 60 Volts DC or less in surface vehicle electrical systems.

**Temperature:** The Temperature Class Rating is 125C. The Temperature Class rating is defined by SAE as " a class designation based on the retention of mechanical properties after 168 hours of aging at 30C above the temperature class rating".

**Notes:**

This product complies with European Directive 2011/65/EU (RoHS 2)

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Coleman Cable's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Coleman Cable or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Coleman Cable's standard terms and conditions contained therein, including without limitation Coleman Cable's standard warranty. Coleman cable disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable.

**Customer Approval:**

**Customer Part Nbr(s):** \_\_\_\_\_

**Approved By:** \_\_\_\_\_ **Date:** \_\_\_\_\_

**Title:** \_\_\_\_\_ **Company Name:** \_\_\_\_\_

**COLEMAN CABLE, INC**

1530 Shields Drive  
Waukegan, IL 60085

Phone: 1-800-323-9355

www.colemancable.com

