

- High quality and reliable Canare assemblies are ideal for any interconnection including broadcast, professional A/V, and telecommunication.
- Custom assembly configurations can be special ordered at affordable cost and quick lead-time.




### ■ BNC Cables for use with 75 Ω BNC connectors.

| Type  | Model   | Length (ft) |
|---|---------|-------------|
| <b>BNC (M) – BNC (M) Crimp</b><br>BCP-C4B LV-61S BCP-C4B<br>  | VAC003F | 3           |
|   | VAC006F | 6           |
|   | VAC010F | 10          |
|   | VAC025F | 25          |
| <b>BNC (M) – BNC (M) Crimp</b><br>BCP-77A LV-77S BCP-C77A<br> | VIC010F | 10          |
|   | VIC025F | 25          |
|   | VIC050F | 50          |
|   | VIC100F | 100         |

### ■ BNC (Multi) These 75 Ω coax multi-cables reduce the correction work of phase shift caused by different cable lengths.

| Type   | Model  | Length (m) |
|--|--|------------|
| <b>BNC (M) – BNC (M) (3C2VS unit)</b><br>BCP-C3B V3-3C BCP-C3B<br> | 3VS01-3C   | 1          |
|  | 3VS02-3C   | 2          |
|  | 3VS03-3C   | 3          |
|  | 3VS05-3C   | 5          |
|  | 3VS08-3C   | 8          |
|  | 3VS10-3C   | 10         |
|  | 4VS01-3C   | 1          |
|  | 4VS02-3C   | 2          |
|  | 4VS03-3C   | 3          |
|  | 4VS05-3C   | 5          |
| 4VS08-3C   | 8  |            |
| 4VS10-3C   | 10   |            |
| <b>BNC (M) – BNC (M) (4C3VS unit)</b><br>BCP-C3B V4-3C BCP-C3B<br> | 5VS01-3C   | 1          |
|  | 5VS02-3C   | 2          |
|  | 5VS03-3C   | 3          |
|  | 5VS05-3C   | 5          |
|  | 5VS08-3C   | 8          |
|  | 5VS10-3C   | 10         |
|  | 5VS15-3C   | 15         |
|  | 5VS20-3C   | 20         |
|  | 5VS30-3C   | 30         |
|  | <b>BNC (M) – BNC (M) (5C2VS unit)</b><br>BCP-C5B V3-5C BCP-C5B<br> | 3VS03-5C   |
| 3VS05-5C   |  | 5          |
| 3VS08-5C   |  | 8          |
| 3VS10-5C   |  | 10         |
| 3VS15-5C   |  | 15         |
| 3VS20-5C   |  | 20         |
| 5VS03-5C   |  | 3          |
| 5VS05-5C   |  | 5          |
| 5VS08-5C   |  | 8          |
| 5VS10-5C   |  | 10         |
| 5VS15-5C   | 15   |            |
| 5VS20-5C   | 20   |            |

### Custom Coax Cable Guide

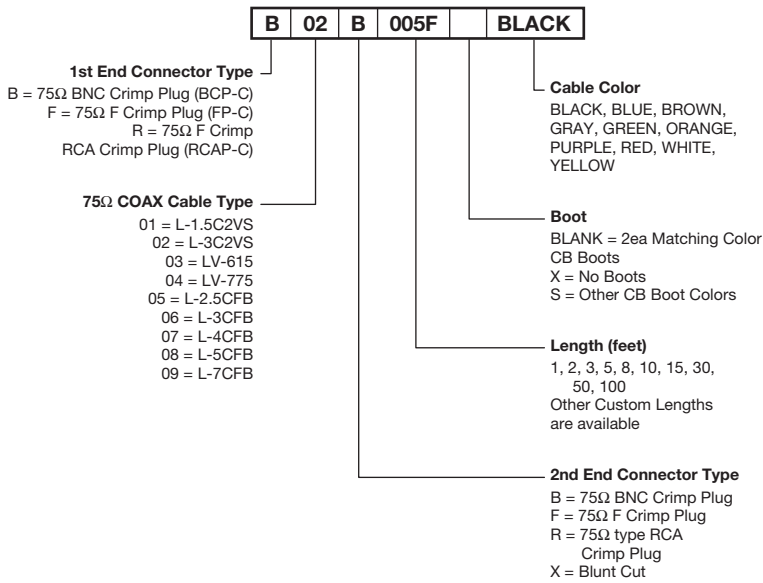

Lengths in brackets indicate that of 1m cable assembly.

### ■ RCA (Multi) Color difference signal input/output cables feature 3CFB cable units to ensure superior transmission characteristics.

| Type  | Type  |
|---|---|
| <b>RCA (M) – RCA (M)</b><br>RCAP-C3F V3-3CFB RCAP-C3F<br> | <b>RCA (M) – RCA (M) Crimp</b><br>RCAP-C3F V5-3CFB RCAP-C3F<br> |

### Custom Multi-Coax Cable Guide

