


PRODUCT SPECIFICATION

<i>DATE</i>	<i>REV</i>	<i>ECN</i>	<i>DESCRIPTION</i>
3/29/2005	B	8355	UPDATED OD

Parent Number: F02033-

Description: 2 7x95/30 BC Super Excelene Welding Cable

DIAMETER: 0.482
TOLERANCE ±: 0.010

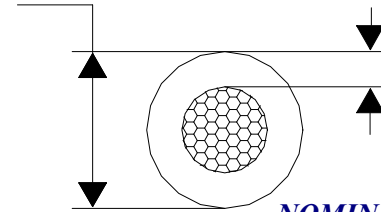

NOMINAL WALL: 0.080
MINIMUM WALL: 0.068

Stranding: 7x95/30 BC Unilay

Style: UL: Super Excelene Welding Cable

Insulation: CPE

Print Legend: E178457 (PLANT ID CODE) 2 AWG (UL) ROYAL (5 CROWNS LOGO) SUPER EXCELENE® WELDING CABLE 90C (-50C) OIL RESISTANT 600V -- MADE IN USA

Voltage: 600V

Temperature: 90C (-50C)

Notes: 1. THIS PRODUCT IS WEATHER RESISTANT

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Coleman Cable's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Coleman Cable or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Coleman Cable's standard terms and conditions contained therein, including without limitation Coleman Cable's standard warranty. Coleman cable disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable.

Customer Approval:

Customer Part Nbr(s): _____

Approved By: _____ **Date:** _____

Title: _____ **Company Name:** _____

COLEMAN CABLE, INC

1530 Shields Drive
Waukegan, IL 60085

Phone: 1-800-323-9355

www.colemancable.com

