


PRODUCT SPECIFICATION

<i>DATE</i>	<i>REV</i>	<i>ECN</i>	<i>DESCRIPTION</i>
12/27/2007	B	19452	P/W UPDATED

Parent Number: **F04064-**

Description: 4 7x60/30 BC Excelene Welding Cable OD
0.420"

DIAMETER: 0.420
TOLERANCE ±: 0.010

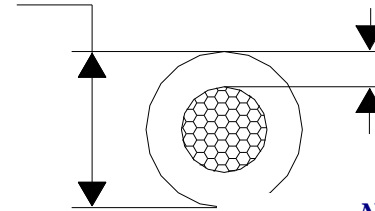

NOM WALL: 0.080

MINIMUM WALL: 0.072

Stranding: 7x60/30 BC LHL

Style: ExCelene Welding Cable

Insulation: EPDM

Print Legend: 4 COPPERFIELD EXCELENE® +105C -50C 600V WELDING CABLE MADE IN USA

Voltage: 600V

Temperature: 105C

- Notes:
1. Separator is used between the copper conductor and insulation.
 2. Conductor complies with ASTM B 172

This product complies with European Directive 2002/95/EC (RoHS)

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Coleman Cable's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Coleman Cable or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Coleman Cable's standard terms and conditions contained therein, including without limitation Coleman Cable's standard warranty. Coleman cable disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable.

Customer Approval:

Customer Part Nbr(s): _____

Approved By: _____ Date: _____

Title: _____ Company Name: _____

COLEMAN CABLE, INC

1530 Shields Drive
Waukegan, IL 60085

Phone: 1-800-323-9355

www.colemancable.com

