

# WireXpress

## UL3239 10 105 STR TNC SIL RBR WHT 150C 40KV ROHS

UL 3239, 10475, SR (silicone rubber) insulated wire, 10 AWG 105 strand  
tinned copper, white

**MFG:** ALL GENERIC VENDORS

**WXP#:** 3239-10/105-9-40KV


Call for Pricing

**Quantity:**  feet

[Add to Cart](#)

Call for Availability

[Reel Lengths](#)

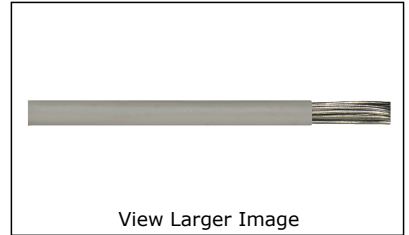

[View Larger Image](#)

## Details

| Attributes                  |                                |
|-----------------------------|--------------------------------|
| <b>UL Style:</b>            | UL TYPE AWM, STYLE 3239        |
| <b>Gauge: (AWG)</b>         | 10 AWG (AMERICAN WIRE GAUGE)   |
| <b>CONDUCTOR: Stranding</b> | 105 STRANDS IN EACH CONDUCTOR  |
| <b>Material</b>             | TINNED COPPER                  |
| <b>INSULATION: Material</b> | SR-SILICONE RUBBER             |
| <b>Color</b>                | WHITE                          |
| <b>Shielded:</b>            | NOT SHIELDED                   |
| <b>JACKET: Material</b>     | POLYVINYL CHLORIDE             |
| <b>CSA</b>                  | CSA TYPE TEW                   |
| <b>Temperature Rating:</b>  | 150 DEGREES CENTIGRADE (302 F) |
| <b>Voltage Rating:</b>      | 40000 VOLTS DC                 |
| <b>Product Type:</b>        | UL STYLES 3000-3999            |
| <b>RoHS Compliant:</b>      | YES                            |
| <b>Unspsc Code</b>          | 26121539                       |

Wirexpress.com