

Compression Connections

BURNDY®

Copper Compression — Code — Long Barrel — No Inspection Window

TWO HOLE HYLUG™ CODE CONDUCTOR LONG BARREL



C-40

TYPES YA-2N, YA-2TC,
YA-4N

UL Listed 90° C,
600 Volts to 35kV ♦

45° and 90° angles are available.

Please contact Customer Service to order:
1-800-346-4175

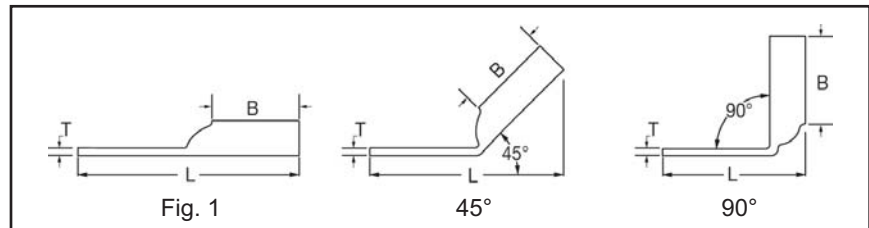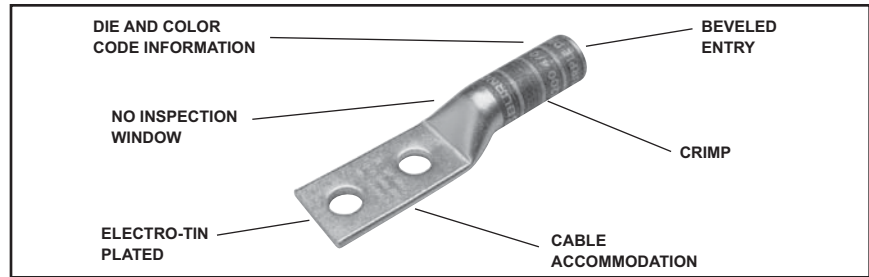

Catalog Number	Fig #	Conductor		Stud Hole Size	Stud Hole Spacing	Tongue Width	Figure Dimensions			▲ Installation Tooling					Wire Strip Length		
		AWG	*** MM ²				(B)	(T)	(L)	Dieless (# of crimps)	Mechanical		Hydraulic			Color Code	Die Index
											MD6, OUR840, MD7-34R	BCT500HS, Y500CTHS	Y35, Y39 Y750, Y46* PAT750				
YA8C2TC14	1	#8 Str. #6 Sol. #8 Weld 37/24	† 10	1/4"	5/8"	0.44"	0.81"	0.08"	2.33"	Y1MRTC (2) Y8MRB-1 (2) MY29-3 (2) MY29-11 (2) MRC840 (2) Y81KFT (1) Y81KFTMBH (1) PAT81KFT-18V (1)	W8CVT (2) W8CRT (2) X8CRT (2)	W8CVT (2) W8CRT (2) X8CRT (2)	U8CRT (1)	Red	49	7/8"	
YA8C2TC14E2				1/4"	3/4"	0.44"	0.81"	0.08"	2.45"								
YA8C2TC38				3/8"	1"	0.58"	0.81"	0.06"	2.89"								
YA6C2TC14	1	#6 AWG	—	1/4"	5/8"	0.45"	1.12"	0.08"	2.65"	Y1MRTC (2) MY29-3 (2) MY29-11 (2) MRC840 (2) Y81KFT (1) Y81KFTMBH (1) PAT81KFT-18V (1)	W5CVT (2) W5CRT (2) X5CRT (2) X8CART (2)	W5CVT (2) W5CRT (2) X5CRT (2) X8CART (2)	U5CRT (2) U8CABT (2)	Blue	7 or 374	1-3/16"	
YA6C2TC14E2				1/4"	3/4"	0.45"	1.12"	0.08"	2.78"								
YA6C2TC14E1				1/4"	1"	0.45"	1.12"	0.08"	3.03"								
YA6C2TC38E2				3/8"	3/4"	0.58"	1.12"	0.06"	2.97"								
YA6C2TC38E6				3/8"	7/8"	0.58"	1.12"	0.06"	3.09"								
YA6C2TC38				3/8"	1"	0.58"	1.12"	0.06"	3.22"								
YA6C2N				1/2"	1-3/4"	0.83"	1.12"	0.12"	4.40"								
YA5C2N	1	#5 AWG	—	1/2"	1-3/4"	0.83"	1.12"	0.12"	4.43"	MY29-3 (2) MY29-11 (2) MRC840 (2) Y644HSXT (1) Y81KFT (1) Y81KFTMBH (1) PAT81KFT-18V (1)	W5CVT (2) W5CRT (2) X5CRT (2)	W5CVT (2) W5CRT (2) X5CRT (2)	U5CRT (2)	Blue	7 or 374	1-3/16"	
YA4C2TC14	1	#4 AWG	—	1/4"	5/8"	0.50"	1.12"	0.09"	2.70"	Y1MRTC (4) MY29-3 (2) MY29-11 (2) MRC840 (2)	W4CVT (2) W4CRT (2) X4CRT (2)	W4CVT (2) W4CRT (2) X4CRT (2)	U4CRT (2) U6CABT (2)	Gray	8 or 346	1-3/16"	
YA4C2TC14E2				1/4"	3/4"	0.50"	1.12"	0.09"	2.83"								
YA4C2TC38				3/8"	1"	0.58"	1.12"	0.08"	3.26"								
YA4C2N				1/2"	1-3/4"	0.83"	1.12"	0.12"	4.45"								
YA3C2TC14	1	#3 Str. #3 AWG #2 Sol.	25	1/4"	5/8"	0.55"	1.25"	0.09"	2.87"	Y644HSXT (1) Y81KFT (1) Y81KFTMBH (1) PAT81KFT-18V (1)	W3CRT (2)	W3CRT (2)	U3CRT (2)	White	9	1-5/16"	
YA3C2TC14E2				1/4"	3/4"	0.55"	1.25"	0.09"	2.99"								
YA3C2TC38E2				3/8"	3/4"	0.58"	1.25"	0.08"	3.18"								
YA3C2TC38				3/8"	1"	0.58"	1.25"	0.08"	3.43"								
YA3C2N				1/2"	1-3/4"	0.83"	1.25"	0.12"	4.62"								

▲ See tooling section of this catalog for complete tool and die listings

* Use PUADP-1 adaptor with U dies in Y46 HYPRESS™

** P-RT die sets for use in Y46 HYPRESS™ only, PUADP-1 adaptor not required

*** The MM² conductor sizes listed are the recommendations for Class 2 conductor

† The MM² conductor size listed here is for Class 2 and Class 5 conductor

Available undrilled. Add suffix U to catalog number (example: YA25U)

♦ For applications greater than 2000 Volts consult cable manufacturer for voltage stress relief instructions

Note: All dimensions shown are for reference only

Blue highlighted items are industry standard and most frequently ordered.

US: 1-800-346-4175

www.burndy.com

Canada: 1-800-387-6487