


MCC PROPRIETARY AND CONFIDENTIAL INFORMATION
 THIS TECHNICAL DATA/DRAWING/DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO, AND IS THE EXPRESS PROPERTY OF MAJOR CUSTOM CABLE INC. OR PARENT COMPANY NEUTRIK EXCEPT AS EXPRESSLY GRANTED BY CONTRACT OR BY OPERATION OF LAW AND IS RESTRICTED TO USE BY ONLY MAJOR CUSTOM CABLE EMPLOYEES AND OTHER PERSONS AUTHORIZED IN WRITING BY MAJOR CUSTOM CABLE OR AS EXPRESSLY GRANTED BY CONTRACT OR BY OPERATION OF LAW. NO PORTION OF THIS DATA/DRAWING/DOCUMENT SHALL BE REPRODUCED OR DISCLOSED OR COPIED OR FURNISHED IN WHOLE OR IN PART TO OTHERS OR USED BY OTHERS FOR ANY PURPOSE WHATSOEVER EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY MAJOR CUSTOM CABLE INC. OR PARENT COMPANY NEUTRIK.

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED BY
A0	FIRST RELEASE	01/03/25	JWELSH

NOTES:

1. 24AWG SOLID BARE COPPER CONDUCTORS
2. CABLE UTILIZED BELDEN'S BONDED PAIR TECHNOLOGY
 - 2.1.1. UNIFORM CONDUCTOR-TO-CONDUCTOR SPACING
 - 2.1.2. INCREASED RESISTANCE TO PULL TENSIONS
 - 2.1.3. CABLE CAN BE SAFELY FLEXED ALONG A BEND RADIUS AS TIGHT AS 4X THE OUTSIDE DIAMETER OF THE CABLE
3. 600V AWM 21047 RATED CABLE
4. SHIELDED CABLE AND CONNECTORS
5. STRAIN RELIEF BOOTS INSTALLED ON EACH END

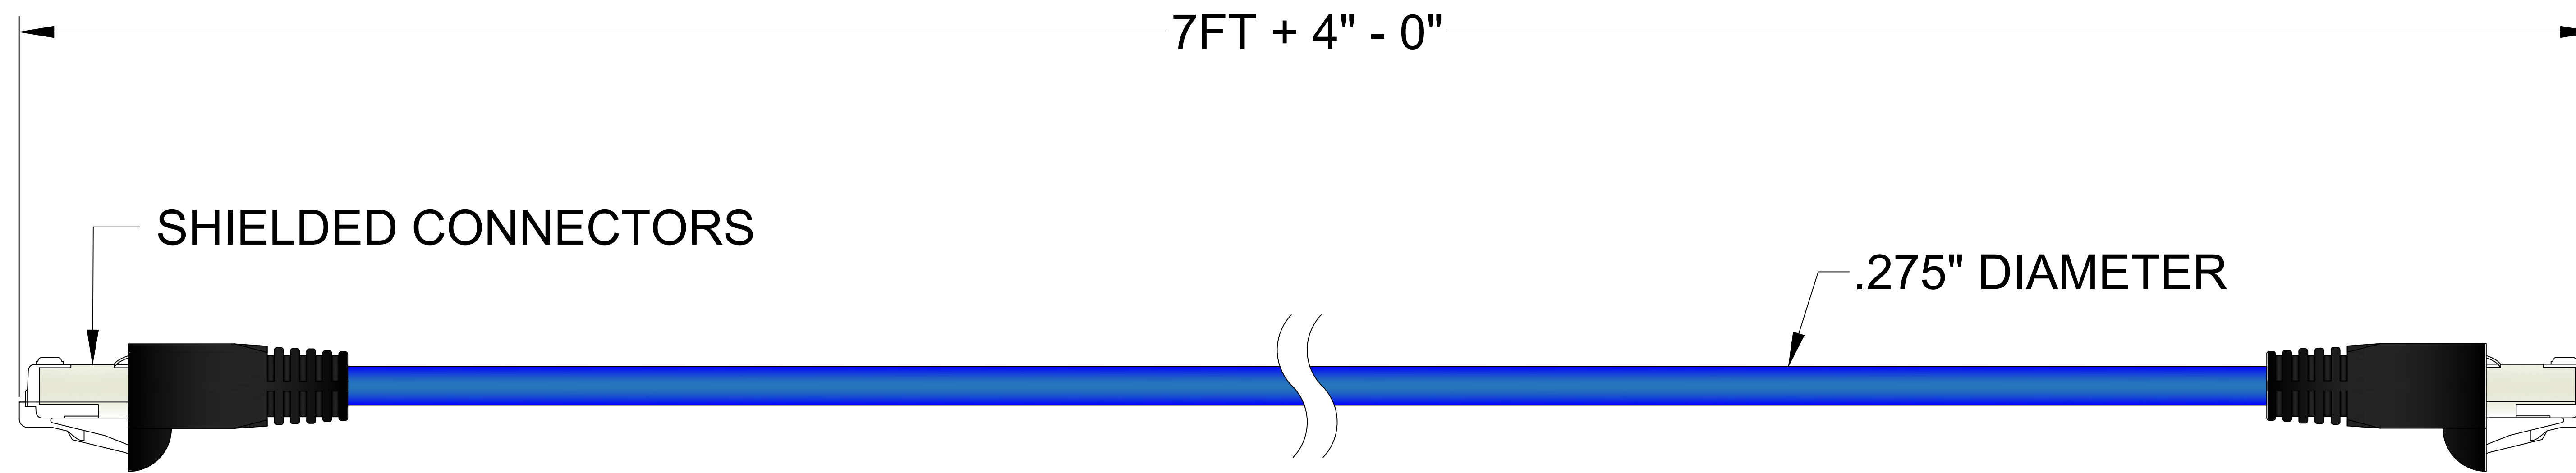

PINOUT		
RJ45S CASE	DRAIN	RJ45S CASE
1	WH/OR	1
2	OR/WH	2
3	WH/GN	3
4	BL/WH	4
5	WH/BL	5
6	GN/WH	6
7	WH/BR	7
8	BR/WH	8

ALL DIMENSIONS ARE IN INCHES PART TO BE FREE OF BURRS UNLESS OTHERWISE SPECIFIED		MCC MAJOR CUSTOM CABLE A Neutrik Group Company	
DRAWING NOT DRAWN TO SCALE		TITLE RJ45S/45S CAT 5E 4P SOLID SCTP TPE HIGH FLEX TEAL	
MAJOR CUSTOM CABLE INC. 281 LOTUS DRIVE JACKSON, MD 63775 (800) 455-6224		SIZE B	PAGE CODE 55W22
ENG. APPR JWELSH	01/03/25	DWG NO Z233053-0007FT	
ENG. AUTH JLUCAS	01/03/25	SCALE 4:1	SHEET 1 OF 1