


| Dome Plugs: Nylon (No O-Ring Groove) - IP 54 | | | | | |
|--|----------|------------------------------|------------------------|----------------|---------------|
| Part Numbers | | Thread Type & Size | Dimensions Inches (mm) | | |
| -40°F to 212°F (-40°C to 100°C) | | | H | D | TL |
| | | See page 56 for thread specs | Overall Height | Outer Diameter | Thread Length |
| Black | Gray | | | | |
| DP-07-BK | DP-07-GY | PG 7 | .31 (8) | .59 (15) | .24 (6) |
| DP-09-BK | DP-09-GY | PG 9 | .35 (9) | .75 (19) | .24 (6) |
| DP-11-BK | DP-11-GY | PG 11 | .35 (9) | .87 (22) | .24 (6) |
| DP-13-BK | DP-13-GY | PG 13 / 13.5 | .37 (9.5) | .98 (25) | .24 (6) |
| DP-16-BK | DP-16-GY | PG 16 | .37 (9.5) | 1.06 (27) | .24 (6) |
| DP-21-BK | DP-21-GY | PG 21 | .43 (11) | 1.30 (33) | .31 (8) |
| DP-29-BK | DP-29-GY | PG 29 | .47 (12) | 1.73 (44) | .31 (8) |
| DP-36-BK | DP-36-GY | PG 36 | .59 (15) | 2.17 (55) | .39 (10) |
| DP-42-BK | DP-42-GY | PG 42 | .63 (16) | 2.44 (62) | .39 (10) |
| DP-48-BK | DP-48-GY | PG 48 | .63 (16) | 2.72 (69) | .47 (12) |
| DM-12-BK | DM-12-GY | M12 x 1.5 | .39 (10) | .59 (15) | .24 (6) |
| DM-16-BK | DM-16-GY | M16 x 1.5 | .45 (11.5) | .79 (20) | .28 (7) |
| DM-20-BK | DM-20-GY | M20 x 1.5 | .37 (9.5) | .98 (25) | .24 (6) |
| DM-25-BK | DM-25-GY | M25 x 1.5 | .61 (15.5) | 1.18 (30) | .43 (11) |
| DM-32-BK | DM-32-GY | M32 x 1.5 | .63 (16) | 1.50 (38) | .43 (11) |
| DM-40-BK | DM-40-GY | M40 x 1.5 | .71 (18) | 1.81 (46) | .51 (13) |
| DM-50-BK | DM-50-GY | M50 x 1.5 | .73 (18.5) | 2.20 (56) | .51 (13) |
| DM-63-BK | DM-63-GY | M63 x 1.5 | .75 (19) | 2.72 (69) | .59 (15) |

| Hex Plugs: Nylon | | | | | |
|-------------------------------|-----------------|------------------------------|------------------------|----------------|---------------|
| Part Numbers | | Thread Type & Size | Dimensions Inches (mm) | | |
| -4°F to 176°F (-20°C to 80°C) | | | B | D | TL |
| | | See page 56 for thread specs | Body Length | Outer Diameter | Thread Length |
| Black* | | | | | |
| HP-07-BK | PG 7 / 1/4" NPT | | .51 (13) | .59 (15) | .33 (8.5) |
| HP-09-BK | PG 9 | | .51 (13) | .75 (19) | .33 (8.5) |
| HP-11-BK | PG 11 | | .57 (14.5) | .94 (24) | .35 (9) |
| HP-13-BK | PG 13 / 13.5 | | .57 (14.5) | .94 (24) | .35 (9) |
| HP-16-BK | PG 16 | | .63 (16) | 1.10 (28) | .41 (10.5) |
| HP-21-BK | PG 21 | | .69 (17.5) | 1.42 (36) | .45 (11.5) |
| HP-29-BK | PG 29 | | .71 (18) | 1.81 (46) | .45 (11.5) |
| HP-36-BK | PG 36 | | .79 (20) | 2.17 (55) | .53 (13.5) |
| HP-42-BK | PG 42 | | .79 (20) | 2.36 (60) | .53 (13.5) |
| HP-48-BK | PG 48 | | .83 (21) | 2.76 (70) | .57 (14.5) |
| HM-12-BK | M12 x 1.5 | | .51 (13) | .59 (15) | .33 (8.5) |
| HM-16-BK | M16 x 1.5 | | .51 (13) | .75 (19) | .33 (8.5) |
| HM-20-BK | M20 x 1.5 | | .57 (14.5) | .94 (24) | .35 (9) |
| HM-25-BK | M25 x 1.5 | | .63 (16) | 1.10 (28) | .41 (10.5) |
| HM-32-BK | M32 x 1.5 | | .69 (17.5) | 1.42 (36) | .45 (11.5) |
| HM-40-BK | M40 x 1.5 | | .71 (18) | 1.81 (46) | .45 (11.5) |
| HM-50-BK | M50 x 1.5 | | .79 (20) | 2.17 (55) | .53 (13.5) |
| HM-63-BK | M63 x 1.5 | | .83 (21) | 2.76 (70) | .57 (14.5) |

*Available with an O-Ring Groove

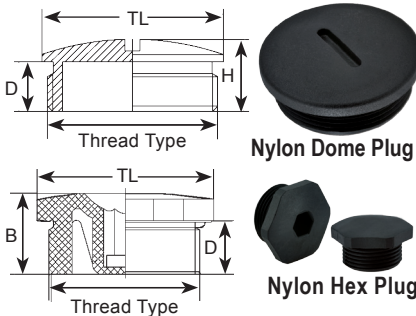

Note: HP & HM Nylon Plugs can be tightened with Hex & Allen wrenches, as well as regular screwdrivers.



Hex Plugs also available with the following approvals:



www.SealconEX.com

| Part Numbers | | Thread Type & Size | Dimensions in Inches (mm) | | | | | |
|------------------------------------|-------------|------------------------------|---------------------------|----------------|---------------|--------------------------|--------------------------|-------------------------|
| -40 °F to 176 °F (-40 °C to 80 °C) | | | H | D | TL | H | D | TL |
| | | See page 56 for thread specs | Overall Height | Outer Diameter | Thread Length | Overall Height w/ O-Ring | Outer Diameter w/ O-Ring | Thread Length w/ O-Ring |
| Without O-Ring | With O-Ring | | | | | | | |
| DM-12-BR | DM-12-BR-B | M12 x 1.5 | .30 (7.5) | .55 (14) | .20 (5) | .37 (9.5) | .55 (14) | .26 (6.5) |
| DM-16-BR | DM-16-BR-B | M16 x 1.5 | .35 (9) | .71 (18) | .20 (5) | .35 (9) | .79 (20) | .24 (6) |
| DM-20-BR | DM-20-BR-B | M20 x 1.5 | .37 (9.5) | .87 (22) | .26 (6.5) | .37 (9.5) | .94 (24) | .26 (6.5) |
| DM-25-BR | DM-25-BR-B | M25 x 1.5 | .43 (11) | 1.10 (28) | .28 (7) | .43 (11) | 1.10 (28) | .28 (7) |
| DM-32-BR | DM-32-BR-B | M32 x 1.5 | .47 (12) | 1.38 (35) | .31 (8) | .49 (12.5) | 1.38 (35) | .31 (8) |
| DM-40-BR | DM-40-BR-B | M40 x 1.5 | .51 (13) | 1.73 (44) | .33 (8.5) | .47 (12) | 1.77 (45) | .31 (8) |
| DM-50-BR | DM-50-BR-B | M50 x 1.5 | .59 (15) | 2.13 (54) | .35 (9) | .59 (15) | 2.17 (55) | .35 (9) |
| DM-63-BR | DM-63-BR-B | M63 x 1.5 | .63 (16) | 2.64 (67) | .39 (10) | .63 (16) | 2.68 (68) | .39 (10) |

Dome Plugs: Nickel Plated Brass

*Note: German Lloyd Approval only applies to Nylon Hex Plugs with PG or Metric Threads.

| Dome Plugs: Nickel Plated Brass | | | | | | |
|---------------------------------|------------|------------------------------|------------------------|---------------|----------------|-------------------------|
| Part Numbers | | Thread Type & Size | Dimensions Inches (mm) | | | |
| -40°F to 176°F (-40°C to 80°C) | | | H | TL | D | TL |
| | | See page 56 for thread specs | Overall Height | Thread Length | Outer Diameter | Thread Length w/ O-Ring |
| without O-Ring | w/ O-Ring | | | | | |
| DP-07-BR | DP-07-BR-B | PG 7 | .31 (8) | .20 (5) | .55 (14) | .19 (4.8) |
| DP-09-BR | DP-09-BR-B | PG 9 | .35 (9) | .24 (6) | .67 (17) | .22 (5.5) |
| DP-11-BR | DP-11-BR-B | PG 11 | .35 (9) | .24 (6) | .79 (20) | .22 (5.5) |
| DP-13-BR | DP-13-BR-B | PG 13 / 13.5 | .37 (9.5) | .26 (6.5) | .87 (22) | .24 (6) |
| DP-16-BR | DP-16-BR-B | PG 16 | .37 (9.5) | .26 (6.5) | .94 (24) | .24 (6) |
| DP-21-BR | DP-21-BR-B | PG 21 | .43 (11) | .28 (7) | 1.18 (30) | .26 (6.5) |
| DP-29-BR | DP-29-BR-B | PG 29 | .47 (12) | .31 (8) | 1.54 (39) | .30 (7.5) |
| DP-36-BR | DP-36-BR-B | PG 36 | .59 (15) | .35 (9) | 1.97 (50) | .35 (9) |
| DP-42-BR | DP-42-BR-B | PG 42 | .63 (16) | .39 (10) | 2.24 (57) | .39 (10) |
| DP-48-BR | DP-48-BR-B | PG 48 | .63 (16) | .39 (10) | 2.52 (64) | .39 (10) |

To order a hole plug with an FKM O-Ring instead of Buna-N, replace "-V" (FKM) to part number (e.g. DP-11-BR-V).



| Hex Plugs: Polypropylene | | | | | |
|------------------------------|----------|------------------------------|------------------------|-------------|---------------|
| Part Numbers | | Thread Type & Size | Dimensions Inches (mm) | | |
| 32°F to 275°F (0°C to 135°C) | | | H | F | TL |
| | | See page 56 for thread specs | Overall Height | Wrench Flat | Thread Length |
| Black | | | | | |
| HN-38-BK | 3/8" NPT | | .83 (21) | .75 (19) | .59 (15) |
| HN-12-BK | 1/2" NPT | | .81 (20.5) | .94 (24) | .55 (14) |
| HN-34-BK | 3/4" NPT | | .87 (22) | 1.10 (28) | .63 (16) |
| HN-10-BK | 1" NPT | | .91 (23) | 1.34 (34) | .67 (17) |

For Material Specifications and Approval Information refer to page 52. O-Ring needed for Nema 4x