



DESC: 18/3 CABLE 80°C 300V

DWG NO: 1803C016

SCALE: 25x DATE: 5/12/04

DR. BY: DP LANGER

NWI NO: FCAB183-014

CUSTOMER: INDUSTRIAL ELECTRIC

CUSTOMER P/N: TRC1803PU-0-000

ITEM


SPECS.

- A. 18 GAUGE 19x.0092BC AUTO-BUNCHED
- B. 6 MILS HYTREL INSULATION 80°C 300V  
5 MILS MIN. HYTREL INSULATION  
NOM. O.D. .059±.001"
- C. TISSUE PAPER SEPARATOR
- D. 35 MILS PRESSURED TPU JACKET 80°C 300V  
28 MILS MIN. BLACK POLYURETHANE JACKET  
CABLE IS NOT UL OR CSA APPROVED

**NORTHWIRE RESTRICTED**

*This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.*

CONDUCTORS PRINTED WITH WHITE INK

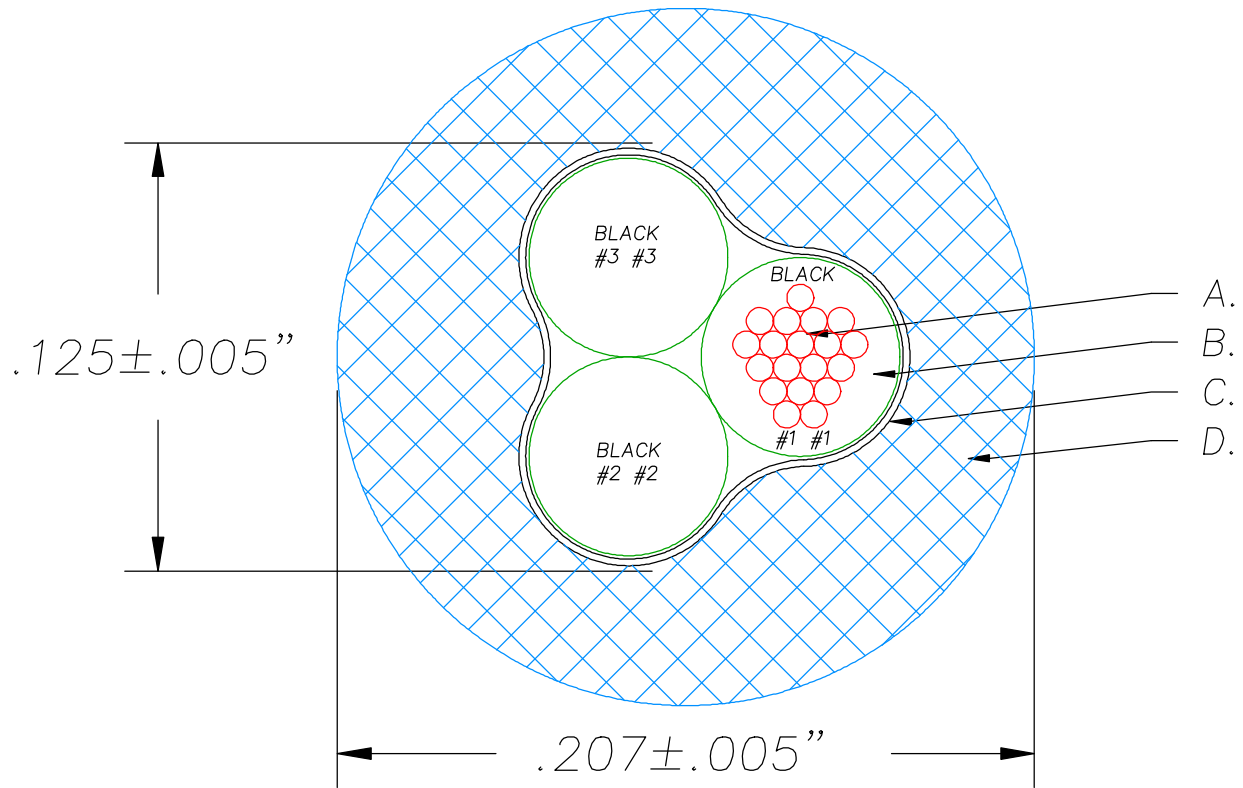

ELECTRICAL REQUIREMENTS:  
NONE SPECIFIED

MECHANICAL REQUIREMENTS:  
NONE SPECIFIED

INITIAL RELEASE	A	5/12/04	DPL	
REVISION RECORD	REV	REV DATE	APPROVAL	APPROVAL

NUMBERS ARE TOWER  
PRINTED WITH EVERY  
OTHER NUMBER  
INVERTED

4

↗

4

↗